

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P#

Luminaire Tested: **LD4C60D010 EX4C609035 4LBSQH**

Issue Date: 2/9/2022



Test Information

Test Method: LM-79-08
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207151)
Test Lab: INNOVATION CENTER
Issue Date: 2/9/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD4C60D010 EX4C609035 4LBSQH
Description: 4 INCH 6000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3500K, 90CRI LEDS
AND 4LBSQ TRIM WITH H FINISH
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5150.0 lumens
Efficiency: N/A
Efficacy: 71.5 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.93
Luminous Opening: Rectangular (W 0.33' x L: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 72
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P#
CATALOG NUMBER: LD4C60D010 EX4C609035 4LBSQH

Luminous Intensity Polar Plot

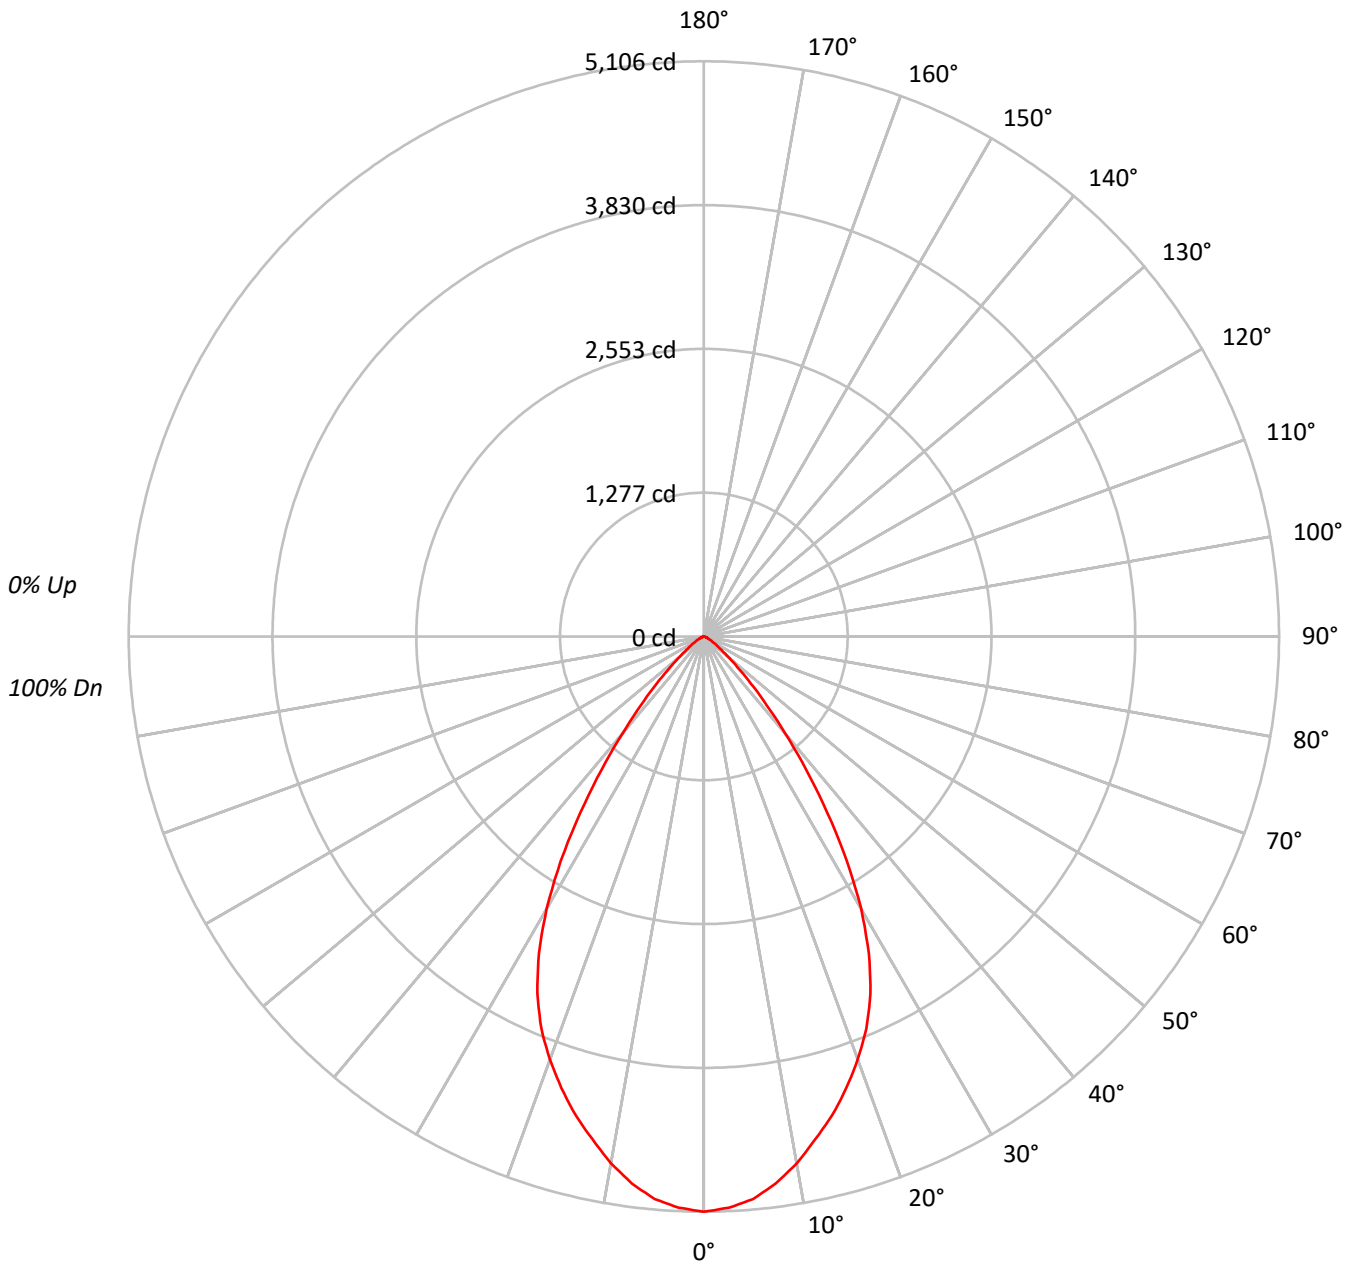



TEST NUMBER: P#

CATALOG NUMBER: LD4C60D010 EX4C609035 4LBSQH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	82	86	83	80	79
4	96	88	82	77	94	86	81	77	84	80	76	82	78	75	80	77	74	73
5	90	82	75	71	89	81	75	70	79	74	70	77	73	69	75	72	69	67
6	86	76	70	65	84	75	69	65	74	68	64	72	68	64	71	67	64	62
7	81	71	65	60	80	70	64	60	69	64	60	68	63	59	67	62	59	58
8	77	67	60	56	75	66	60	56	65	59	56	64	59	55	63	58	55	54
9	73	63	56	52	72	62	56	52	61	56	52	60	55	52	59	55	52	50
10	69	59	53	49	68	59	53	49	58	52	49	57	52	48	56	52	48	47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	492721
5°	485566
10°	465285
15°	439458
20°	410212
25°	372378
30°	310895
35°	225229
40°	140997
45°	80591
50°	42016
55°	23551
60°	15014
65°	8881
70°	6573
75°	2908
80°	4334
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LD4C60D010 EX4C609035 4LBSQH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	469.9	9.1
10°-20°	1232.7	23.9
20°-30°	1584.2	30.8
30°-40°	1191.9	23.1
40°-50°	478.7	9.3
50°-60°	136.1	2.6
60°-70°	43.1	0.8
70°-80°	12.3	0.2
80°-90°	1.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3286.8	63.8
0°-40°	4478.8	87.0
0°-60°	5093.6	98.9
0°-90°	5150.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5150.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5106	
5°	5013	470
15°	4399	1233
25°	3498	1584
35°	1912	1192
45°	591	479
55°	140	136
65°	39	43
75°	8	12
85°	0	1
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD4C60D010 EX4C609035 4LBSQH

CANDELA DISTRIBUTION (FULL):

	0°
0°	5106.5
2.5°	5075.4
5°	5013.2
7.5°	4896.6
10°	4748.9
12.5°	4570.4
15°	4399.3
17.5°	4204.9
20°	3995.0
22.5°	3769.8
25°	3497.7
27.5°	3171.1
30°	2790.4
32.5°	2362.8
35°	1912.1
37.5°	1492.2
40°	1119.4
42.5°	823.9
45°	590.6
47.5°	404.3
50°	279.9
52.5°	194.4
55°	140.0
57.5°	101.1
60°	77.8
62.5°	54.4
65°	38.9
67.5°	31.1
70°	23.3
72.5°	15.6
75°	7.8
77.5°	7.8
80°	7.8
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)