

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P#

Luminaire Tested: **LD4C80D010 EX4C809027 4LBSQH**

Issue Date: 2/9/2022

Test Information

Test Method: LM-79-08
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207151)
Test Lab: INNOVATION CENTER
Issue Date: 2/9/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD4C80D010 EX4C809027 4LBSQH
Description: 4 INCH 8000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 2700K, 90CRI LEDS
AND 4LBSQ TRIM WITH H FINISH
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6815.0 lumens
Efficiency: N/A
Efficacy: 76.1 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.93
Luminous Opening: Rectangular (W 0.33' x L: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 89.5
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P#
CATALOG NUMBER: LD4C80D010 EX4C809027 4LBSQH

Luminous Intensity Polar Plot

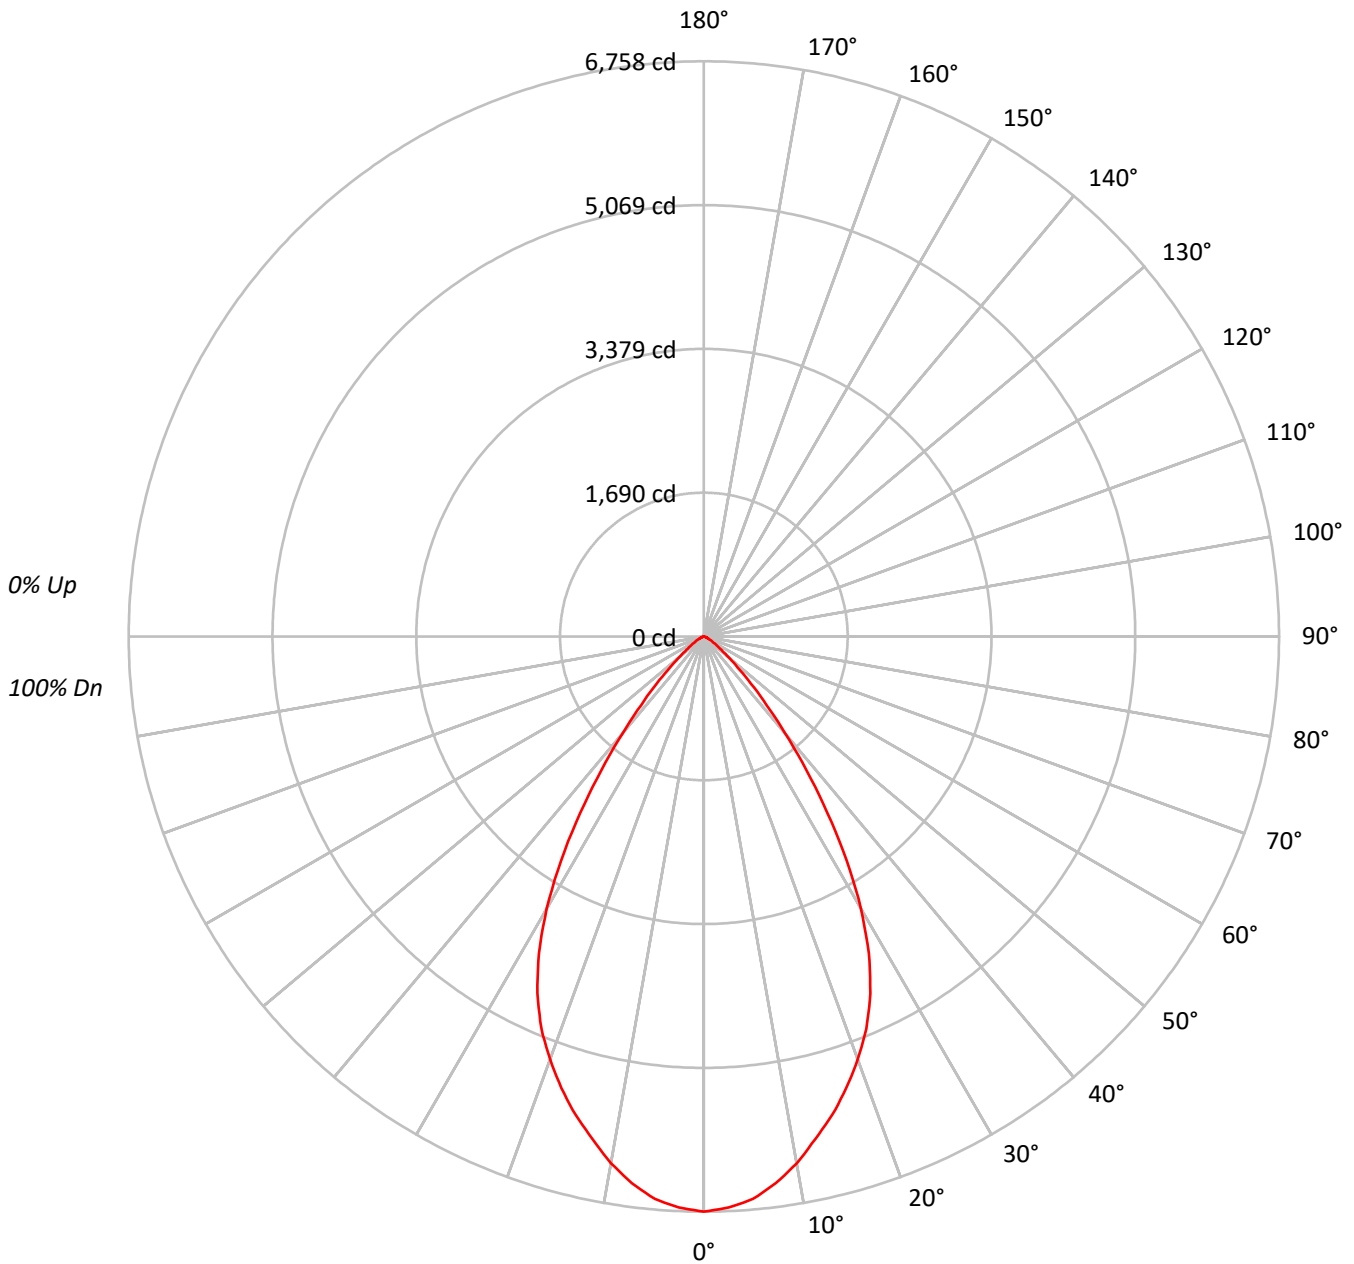



TEST NUMBER: P#

CATALOG NUMBER: LD4C80D010 EX4C809027 4LBSQH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85	85	85	85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	82	86	83	80	79	79	79	79
4	96	88	82	77	94	86	81	77	84	80	76	82	78	75	80	77	74	73	73	73	73
5	90	82	75	71	89	81	75	70	79	74	70	77	73	69	75	72	69	67	67	67	67
6	86	76	70	65	84	75	69	65	74	68	64	72	68	64	71	67	64	62	62	62	62
7	81	71	65	60	80	70	64	60	69	64	60	68	63	59	67	62	59	58	58	58	58
8	77	67	60	56	75	66	60	56	65	59	56	64	59	55	63	58	55	54	54	54	54
9	73	63	56	52	72	62	56	52	61	56	52	60	55	52	59	55	52	50	50	50	50
10	69	59	53	49	68	59	53	49	58	52	49	57	52	48	56	52	48	47	47	47	47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	652024
5°	642552
10°	615710
15°	581535
20°	542825
25°	492767
30°	411414
35°	298047
40°	186568
45°	106640
50°	55601
55°	31155
60°	19857
65°	11735
70°	8717
75°	3840
80°	5723
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LD4C80D010 EX4C809027 4LBSQH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	621.8	9.1
10°-20°	1631.3	23.9
20°-30°	2096.4	30.8
30°-40°	1577.3	23.1
40°-50°	633.5	9.3
50°-60°	180.1	2.6
60°-70°	57.0	0.8
70°-80°	16.3	0.2
80°-90°	1.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4349.5	63.8
0°-40°	5926.8	87.0
0°-60°	6740.3	98.9
0°-90°	6815.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6815.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6758	
5°	6634	622
15°	5822	1631
25°	4628	2096
35°	2530	1577
45°	782	633
55°	185	180
65°	51	57
75°	10	16
85°	0	1
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD4C80D010 EX4C809027 4LBSQH

CANDELA DISTRIBUTION (FULL):

	0°
0°	6757.5
2.5°	6716.3
5°	6634.0
7.5°	6479.7
10°	6284.2
12.5°	6048.0
15°	5821.6
17.5°	5564.4
20°	5286.5
22.5°	4988.6
25°	4628.5
27.5°	4196.3
30°	3692.6
32.5°	3126.7
35°	2530.3
37.5°	1974.7
40°	1481.2
42.5°	1090.2
45°	781.5
47.5°	535.1
50°	370.4
52.5°	257.2
55°	185.2
57.5°	133.8
60°	102.9
62.5°	72.0
65°	51.4
67.5°	41.2
70°	30.9
72.5°	20.6
75°	10.3
77.5°	10.3
80°	10.3
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)