

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P840309

Luminaire Tested: **LDS4C10D010 EU4109027 4LBPSSQMMS**

Issue Date: 8/24/2022

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



Test Information

Test Method: LM-79-08
Report Number: P840309
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2105-247-18)
Test Lab: INNOVATION CENTER
Issue Date: 8/24/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LDS4C10D010 EU4109027 4LBPSSQMMS
Description: 4 INCH 1000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 2700K, 90CRI LEDS
AND 4LBPSSQ TRIM WITH MMS FINISH
Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 778.0 lumens
Efficiency: N/A
Efficacy: 79.4 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.25
Luminous Opening: Rectangular (W 0.33' x L: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 9.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P840309

CATALOG NUMBER: LDS4C10D010 EU4109027 4LBPSSQMMS

Luminous Intensity Polar Plot

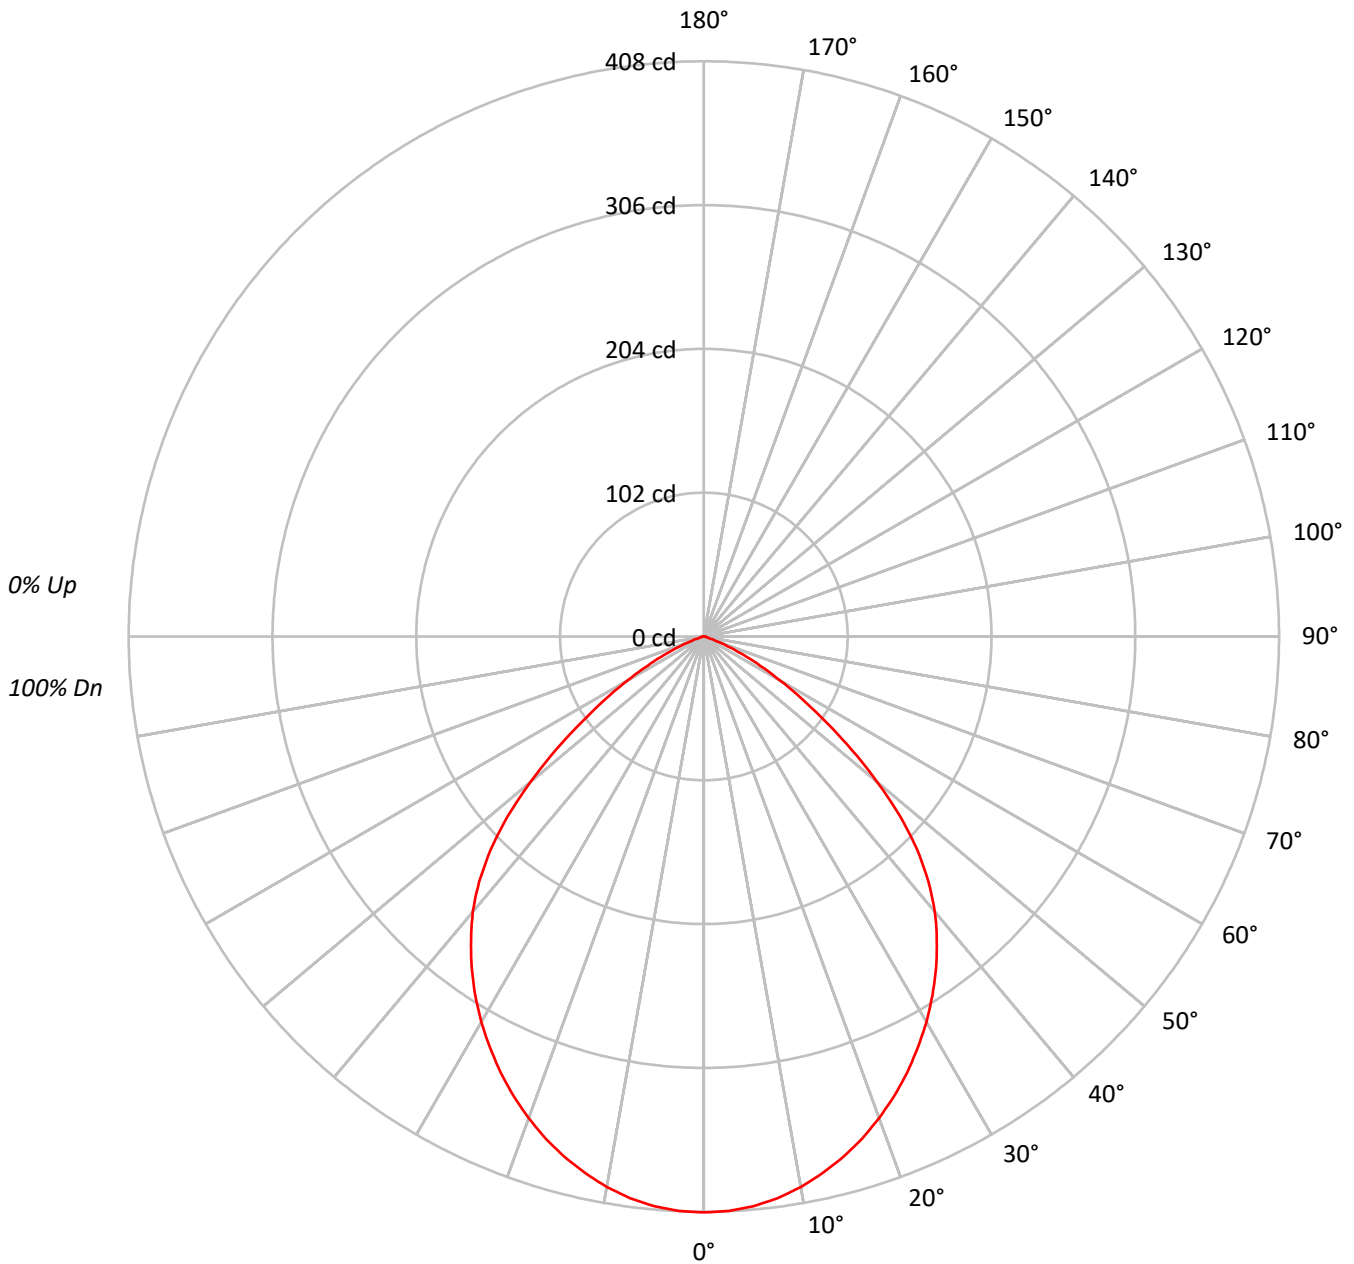



TEST NUMBER: P840309

CATALOG NUMBER: LDS4C10D010 EU4109027 4LBPSSQMMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	92	90	90	90	90
2	104	97	92	88	101	96	91	87	92	88	85	89	86	83	86	83	81	79	79	79	79
3	96	88	81	76	94	86	80	75	83	78	74	81	76	73	78	75	72	70	70	70	70
4	89	79	72	66	87	78	71	66	76	70	65	73	68	64	71	67	63	62	62	62	62
5	83	72	64	59	81	71	64	58	69	63	58	67	61	57	65	60	57	55	55	55	55
6	77	65	58	52	75	65	57	52	63	56	52	61	56	51	60	55	51	49	49	49	49
7	72	60	52	47	70	59	52	47	58	51	46	56	50	46	55	50	46	44	44	44	44
8	67	55	47	42	66	54	47	42	53	47	42	52	46	42	51	46	41	40	40	40	40
9	63	51	43	38	62	50	43	38	49	43	38	48	42	38	47	42	38	36	36	36	36
10	59	47	40	35	58	47	40	35	46	39	35	45	39	35	44	39	35	33	33	33	33

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	39416
5°	39285
10°	38848
15°	38179
20°	37325
25°	36325
30°	35185
35°	33830
40°	32119
45°	29202
50°	24108
55°	17748
60°	12042
65°	7055
70°	2793
75°	634
80°	833
85°	1439



TEST NUMBER: P840309

CATALOG NUMBER: LDS4C10D010 EU4109027 4LBPSSQMMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	38.4	4.9
10°-20°	107.6	13.8
20°-30°	157.0	20.2
30°-40°	179.2	23.0
40°-50°	162.9	20.9
50°-60°	96.1	12.3
60°-70°	32.2	4.1
70°-80°	3.4	0.4
80°-90°	1.2	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	303.0	39.0
0°-40°	482.2	62.0
0°-60°	741.2	95.3
0°-90°	778.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	778.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	408	
5°	406	38
15°	382	108
25°	341	157
35°	287	179
45°	214	163
55°	106	96
65°	31	32
75°	2	3
85°	1	1
90°	0	



TEST NUMBER: P840309

CATALOG NUMBER: LDS4C10D010 EU4109027 4LBPSSQMMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	408.5
2.5°	407.9
5°	405.6
7.5°	401.8
10°	396.5
12.5°	389.8
15°	382.2
17.5°	373.4
20°	363.5
22.5°	352.8
25°	341.2
27.5°	328.6
30°	315.8
32.5°	301.7
35°	287.2
37.5°	271.4
40°	255.0
42.5°	235.9
45°	214.0
47.5°	188.8
50°	160.6
52.5°	132.5
55°	105.5
57.5°	82.6
60°	62.4
62.5°	45.2
65°	30.9
67.5°	18.9
70°	9.9
72.5°	3.8
75°	1.7
77.5°	1.7
80°	1.5
82.5°	1.3
85°	1.3
87.5°	1.1
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)