

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P840364

Luminaire Tested: **LDS4C35D010 EU4359040 4LBPSSQMB**

Issue Date: 8/24/2022

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



Test Information

Test Method: LM-79-08
Report Number: P840364
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2105-247-18)
Test Lab: INNOVATION CENTER
Issue Date: 8/24/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LDS4C35D010 EU4359040 4LBPSSQMB
Description: 4 INCH 3500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 4000K, 90CRI LEDS
AND 4LBPSSQ TRIM WITH MB FINISH
Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2764.0 lumens
Efficiency: N/A
Efficacy: 68.4 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.25
Luminous Opening: Rectangular (W 0.33' x L: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 40.4
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P840364

CATALOG NUMBER: LDS4C35D010 EU4359040 4LBPSSQMB

Luminous Intensity Polar Plot

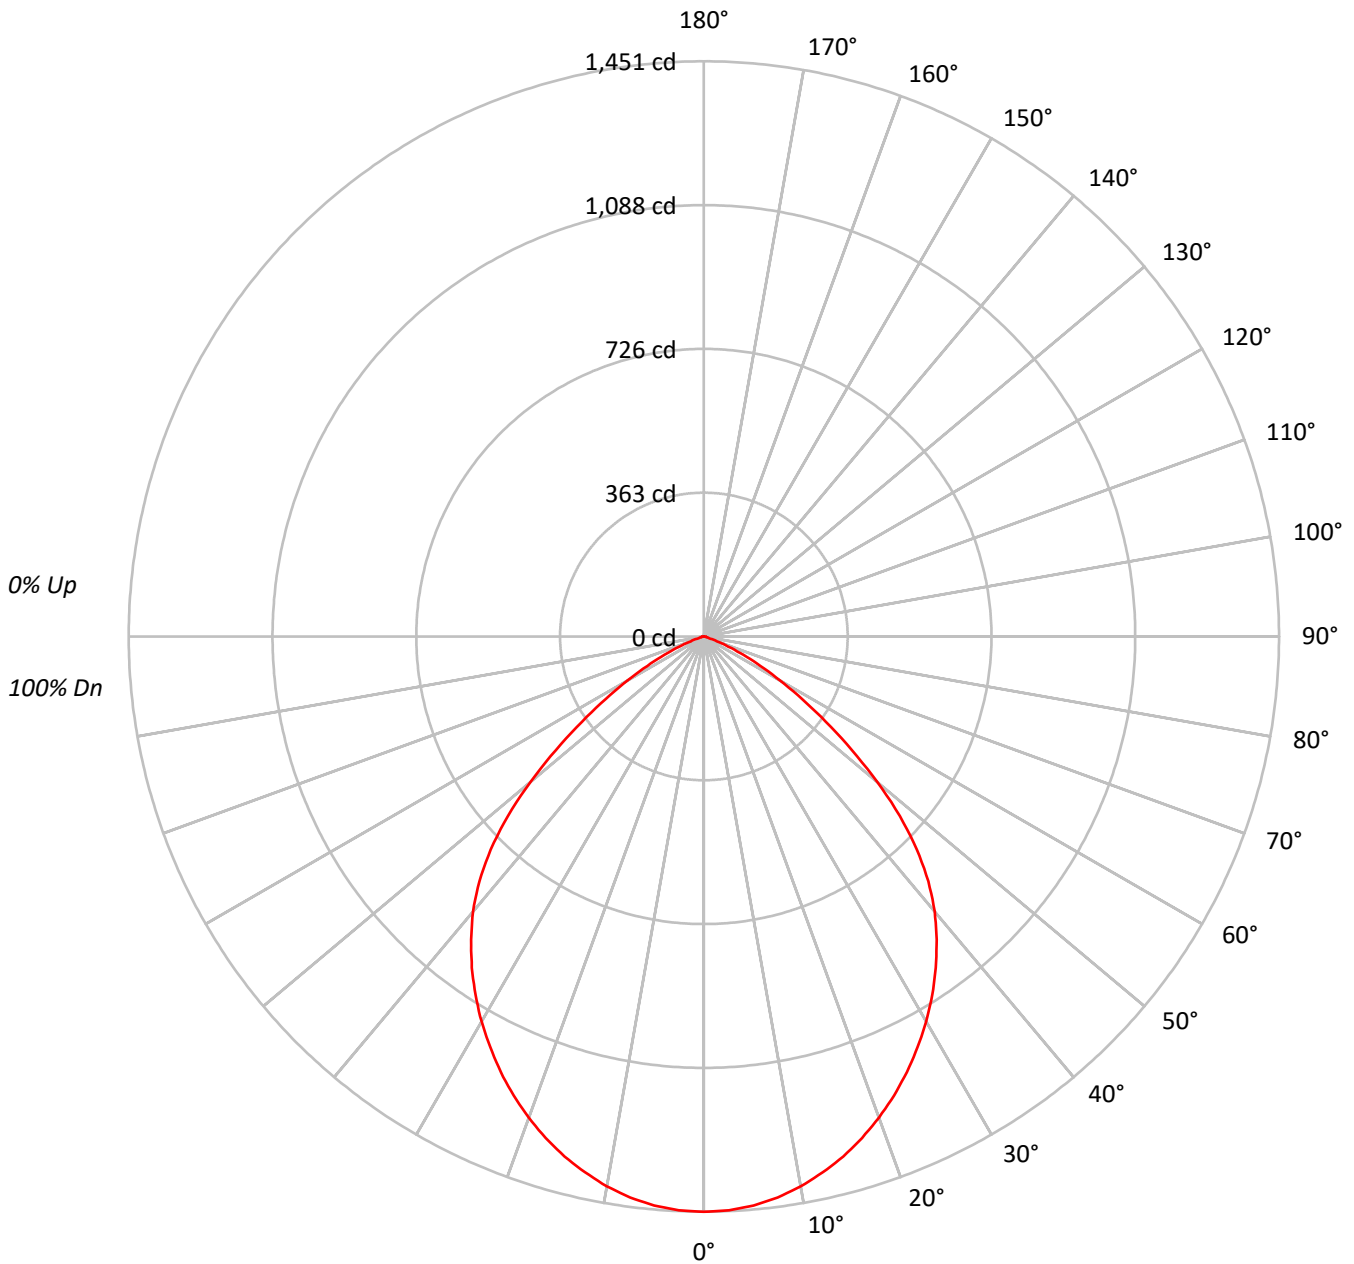



TEST NUMBER: P840364

CATALOG NUMBER: LDS4C35D010 EU4359040 4LBPSSQMB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	92	90			90
2	104	97	92	88	101	96	91	87	92	88	85	89	86	83	86	83	81	79			79
3	96	88	81	76	94	86	80	75	83	78	74	81	76	73	78	75	72	70			70
4	89	79	72	66	87	78	71	66	76	70	65	73	68	64	71	67	63	62			62
5	83	72	64	59	81	71	64	58	69	63	58	67	61	57	65	60	57	55			55
6	77	65	58	52	75	65	57	52	63	56	52	61	56	51	60	55	51	49			49
7	72	60	52	47	70	59	52	47	58	51	46	56	50	46	55	50	46	44			44
8	67	55	47	42	66	54	47	42	53	47	42	52	46	42	51	46	41	40			40
9	63	51	43	38	62	50	43	38	49	43	38	48	42	38	47	42	38	36			36
10	59	47	40	35	58	47	40	35	46	39	35	45	39	35	44	39	35	33			33

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	140034
5°	139562
10°	138021
15°	135654
20°	132613
25°	129066
30°	124997
35°	120182
40°	114130
45°	103761
50°	85668
55°	63084
60°	42802
65°	25069
70°	9902
75°	2237
80°	2889
85°	4982



TEST NUMBER: P840364

CATALOG NUMBER: LDS4C35D010 EU4359040 4LBPSSQMB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	136.5	4.9
10°-20°	382.4	13.8
20°-30°	557.7	20.2
30°-40°	636.6	23.0
40°-50°	578.8	20.9
50°-60°	341.4	12.4
60°-70°	114.5	4.1
70°-80°	12.0	0.4
80°-90°	4.2	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1076.6	39.0
0°-40°	1713.3	62.0
0°-60°	2633.4	95.3
0°-90°	2764.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2764.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1451	
5°	1441	137
15°	1358	382
25°	1212	558
35°	1020	637
45°	760	579
55°	375	341
65°	110	114
75°	6	12
85°	4	4
90°	0	



TEST NUMBER: P840364

CATALOG NUMBER: LDS4C35D010 EU4359040 4LBPSSQMB

CANDELA DISTRIBUTION (FULL):

0°	
0°	1451.3
2.5°	1449.1
5°	1440.9
7.5°	1427.4
10°	1408.7
12.5°	1384.8
15°	1358.0
17.5°	1326.6
20°	1291.5
22.5°	1253.4
25°	1212.3
27.5°	1167.5
30°	1121.9
32.5°	1071.9
35°	1020.3
37.5°	964.3
40°	906.1
42.5°	838.1
45°	760.4
47.5°	670.8
50°	570.7
52.5°	470.6
55°	375.0
57.5°	293.6
60°	221.8
62.5°	160.6
65°	109.8
67.5°	67.2
70°	35.1
72.5°	13.4
75°	6.0
77.5°	6.0
80°	5.2
82.5°	4.5
85°	4.5
87.5°	3.7
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)