

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P170598

Luminaire Tested: **LDA4A13830D010TE LAR15SP 4LFC1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P170598  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26141)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LDA4A13830D010TE LAR15SP 4LFC1  
Description: PORTFOLIO 4" Flat Cone, Self-flange Trim Ring, 15° Spot Optic, at 0° tilt  
Light Source: (1) HIGH LUMEN LED 80CRI / 3000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1466.4 lumens  
Efficiency: N/A  
Efficacy: 65.8 lumens/watt  
Spacing Criteria (0/90/45): 0.32 / 0.32 / 0.36  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 22.27  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P170598

CATALOG NUMBER: LDA4A13830D010TE LAR15SP 4LFC1

### Luminous Intensity Polar Plot

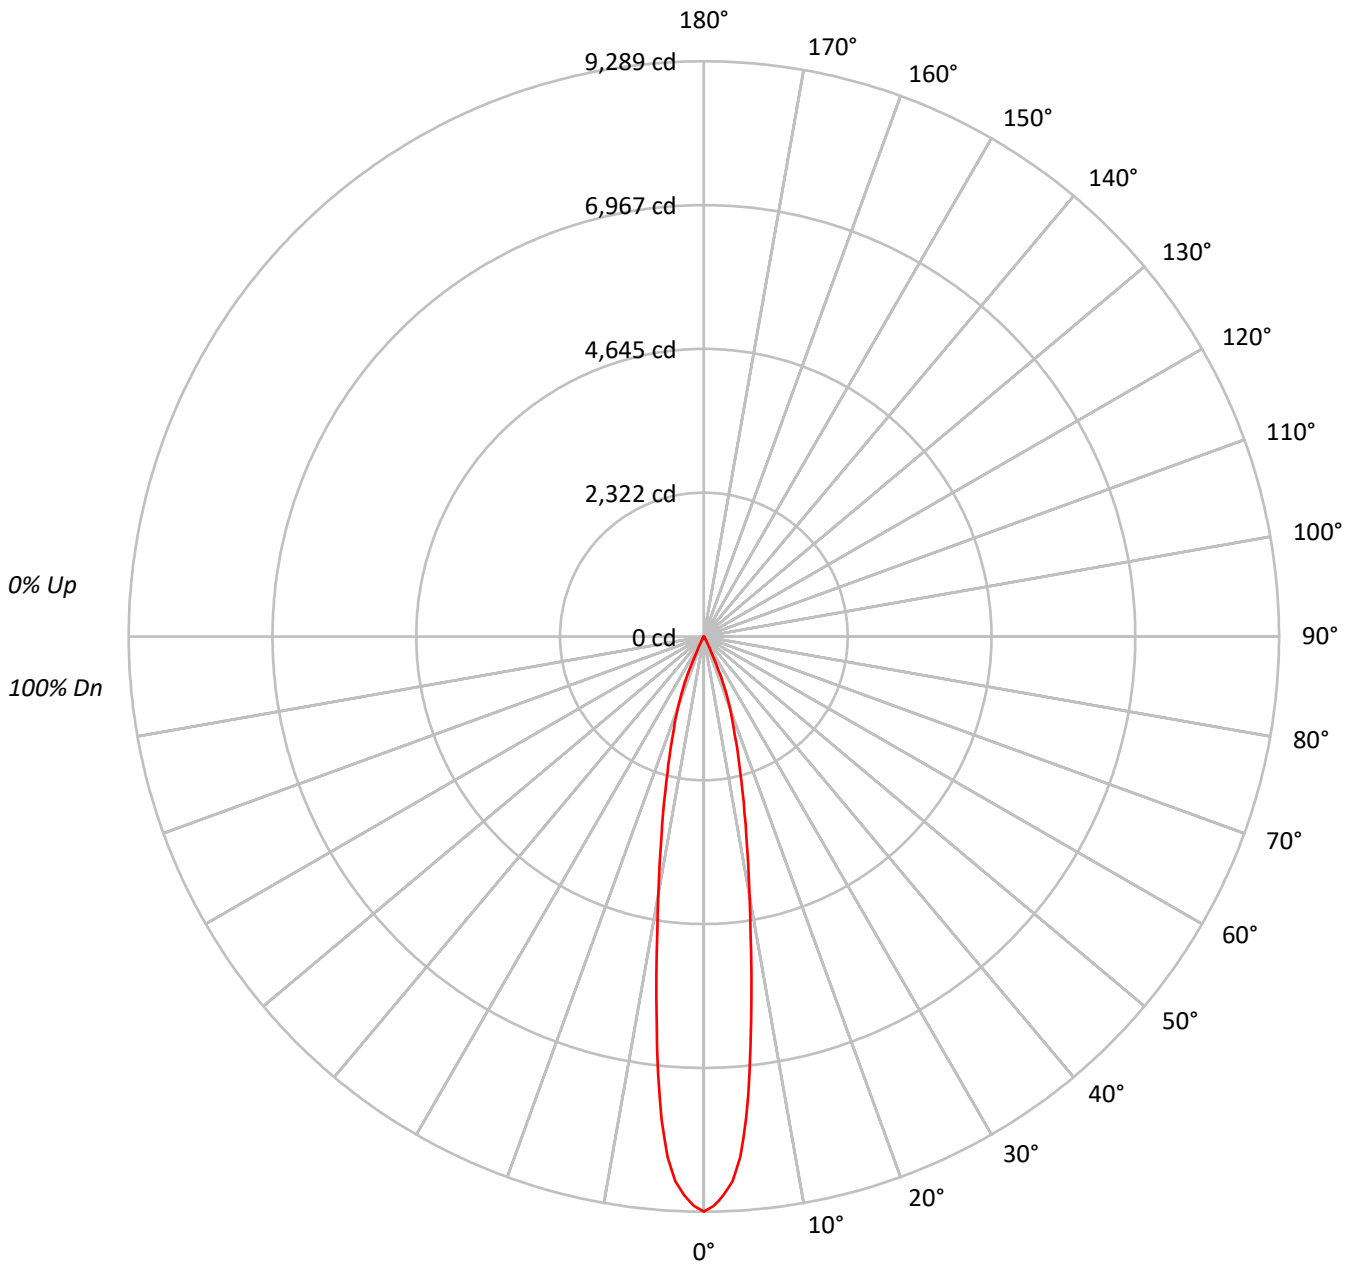



TEST NUMBER: P170598

CATALOG NUMBER: LDA4A13830D010TE LAR15SP 4LFC1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	113	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97	97	97	97
2	112	109	106	103	110	107	104	102	104	102	100	101	99	98	98	97	96	95	95	95	95
3	109	104	101	98	107	103	100	98	101	98	96	98	96	95	96	95	93	92	92	92	92
4	106	101	97	94	104	100	97	94	98	95	93	96	94	92	94	92	91	90	90	90	90
5	103	98	94	91	102	97	93	91	95	92	90	94	91	89	92	90	89	88	88	88	88
6	100	95	91	88	99	94	91	88	93	90	87	92	89	87	91	88	86	85	85	85	85
7	98	92	88	86	97	92	88	86	91	87	85	90	87	85	89	86	84	83	83	83	83
8	96	90	86	83	95	89	86	83	88	85	83	88	85	83	87	84	82	81	81	81	81
9	94	88	84	81	93	87	84	81	86	83	81	86	83	81	85	82	81	80	80	80	80
10	91	85	82	79	91	85	82	79	84	81	79	84	81	79	83	81	79	78	78	78	78

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1145745
5°	968743
10°	530891
15°	289795
20°	161439
25°	37304
30°	7221
35°	2078
40°	741
45°	262
50°	0
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P170598

CATALOG NUMBER: LDA4A13830D010TE LAR15SP 4LFC1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	616.1	42.0
10°-20°	644.6	44.0
20°-30°	193.3	13.2
30°-40°	11.2	0.8
40°-50°	1.3	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1453.9	99.1
0°-40°	1465.1	99.9
0°-60°	1466.4	100.0
0°-90°	1466.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1466.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	9289	
5°	7824	616
15°	2269	645
25°	274	193
35°	14	11
45°	2	1
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P170598

CATALOG NUMBER: LDA4A13830D010TE LAR15SP 4LFC1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	9288.9
1°	9197.5
2°	9032.4
3°	8811.3
4°	8429.0
5°	7824.0
6°	7075.5
7°	6260.9
8°	5503.9
9°	4812.2
10°	4238.7
11°	3742.0
12°	3300.5
13°	2918.9
14°	2577.3
15°	2269.4
17.5°	1649.1
20°	1229.9
22.5°	810.7
25°	274.1
27.5°	95.2
30°	50.7
32.5°	25.3
35°	13.8
37.5°	7.7
40°	4.6
42.5°	2.3
45°	1.5
47.5°	0.8
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P170598

CATALOG NUMBER: LDA4A13830D010TE LAR15SP 4LFC1

**CANDELA DISTRIBUTION (continued):**

0°  
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)