

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P170470

Luminaire Tested: **LDA4A13830D010TE LAR35FL 4LA1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P170470  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P25630)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LDA4A13830D010TE LAR35FL 4LA1  
Description: PORTFOLIO 4" Adjustable Reflector, Self-flange Trim Ring, 35° Flood Optic, at 0° tilt  
Light Source: (1) HIGH LUMEN LED 80CRI / 3000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1378.2 lumens  
Efficiency: N/A  
Efficacy: 61.9 lumens/watt  
Spacing Criteria (0/90/45): 0.56 / 0.56 / 0.54  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct

Input Watts (W): 22.27  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P170470  
CATALOG NUMBER: LDA4A13830D010TE LAR35FL 4LA1

### Luminous Intensity Polar Plot

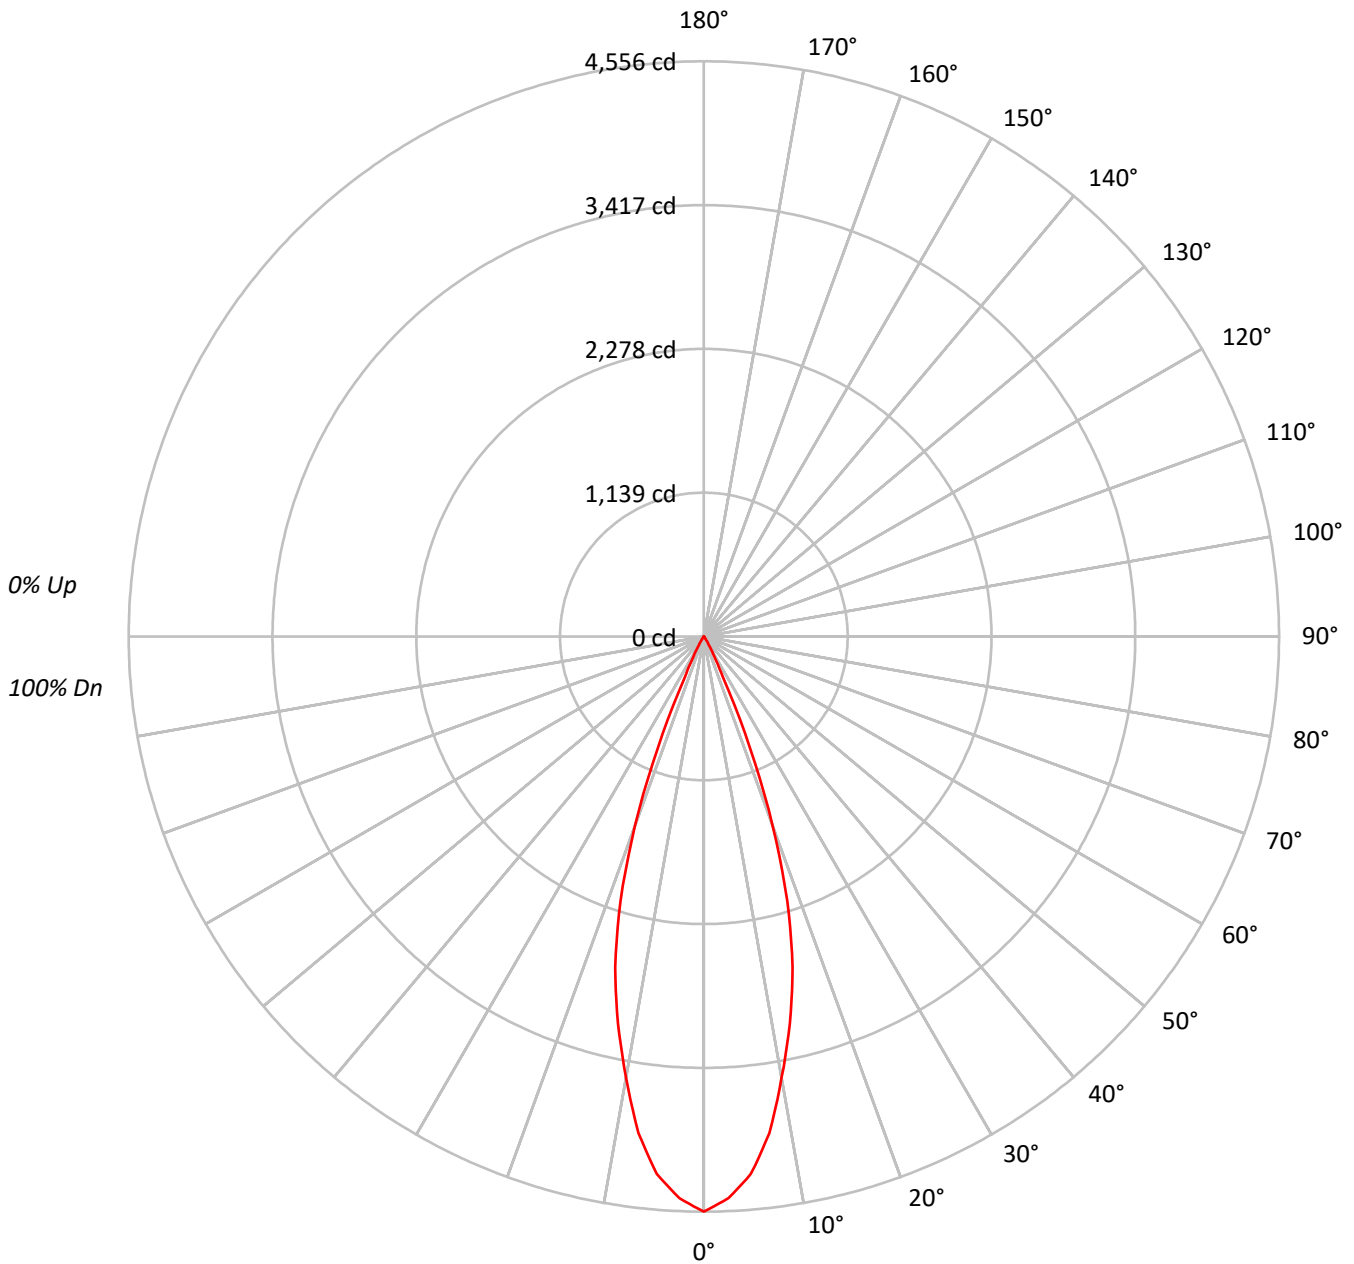



TEST NUMBER: P170470

CATALOG NUMBER: LDA4A13830D010TE LAR35FL 4LA1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	113	111	109	113	111	109	107	107	105	104	103	102	101	100	99	98	97	97	97	97
2	111	108	104	102	109	106	103	101	103	101	99	100	98	97	97	96	95	93	97	96	95
3	108	103	99	96	106	102	98	96	99	96	94	97	95	93	95	93	91	90	97	95	93
4	104	99	95	92	103	98	94	91	96	93	90	94	91	89	92	90	88	87	92	90	88
5	101	95	91	88	100	94	90	87	93	89	87	91	88	86	90	87	85	84	90	87	85
6	98	92	87	84	97	91	87	84	90	86	84	88	85	83	87	85	83	81	87	85	83
7	95	88	84	81	94	88	84	81	87	83	81	86	83	80	85	82	80	79	85	82	80
8	92	86	81	78	91	85	81	78	84	81	78	83	80	78	82	80	77	76	82	80	77
9	90	83	79	76	89	82	79	76	82	78	76	81	78	75	80	77	75	74	80	77	75
10	87	80	76	74	86	80	76	73	79	76	73	79	75	73	78	75	73	72	78	75	73

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	561926
5°	529094
10°	444432
15°	346556
20°	209205
25°	48478
30°	12690
35°	3012
40°	982
45°	262
50°	154
55°	172
60°	197
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P170470

CATALOG NUMBER: LDA4A13830D010TE LAR35FL 4LA1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	384.9	27.9
10°-20°	724.9	52.6
20°-30°	248.1	18.0
30°-40°	17.7	1.3
40°-50°	1.7	0.1
50°-60°	0.7	0.1
60°-70°	0.3	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1357.8	98.5
0°-40°	1375.5	99.8
0°-60°	1377.9	100.0
0°-90°	1378.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1378.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4556	
5°	4273	385
15°	2714	725
25°	356	248
35°	20	18
45°	2	2
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P170470

CATALOG NUMBER: LDA4A13830D010TE LAR35FL 4LA1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	4555.7
2.5°	4453.6
5°	4273.2
7.5°	3967.6
10°	3548.4
12.5°	3141.5
15°	2713.9
17.5°	2194.9
20°	1593.8
22.5°	952.0
25°	356.2
27.5°	173.5
30°	89.1
32.5°	39.9
35°	20.0
37.5°	10.7
40°	6.1
42.5°	3.1
45°	1.5
47.5°	0.8
50°	0.8
52.5°	0.8
55°	0.8
57.5°	0.8
60°	0.8
62.5°	0.8
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)