

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P170602

Luminaire Tested: **LDA4A13930D010TE LAR15SP 4LFC1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P170602  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26141)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LDA4A13930D010TE LAR15SP 4LFC1  
Description: PORTFOLIO 4" Flat Cone, Self-flange Trim Ring, 15° Spot Optic, at 0° tilt  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1254.1 lumens  
Efficiency: N/A  
Efficacy: 56.3 lumens/watt  
Spacing Criteria (0/90/45): 0.32 / 0.32 / 0.36  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct


Input Watts (W): 22.27  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P170602

CATALOG NUMBER: LDA4A13930D010TE LAR15SP 4LFC1

### Luminous Intensity Polar Plot

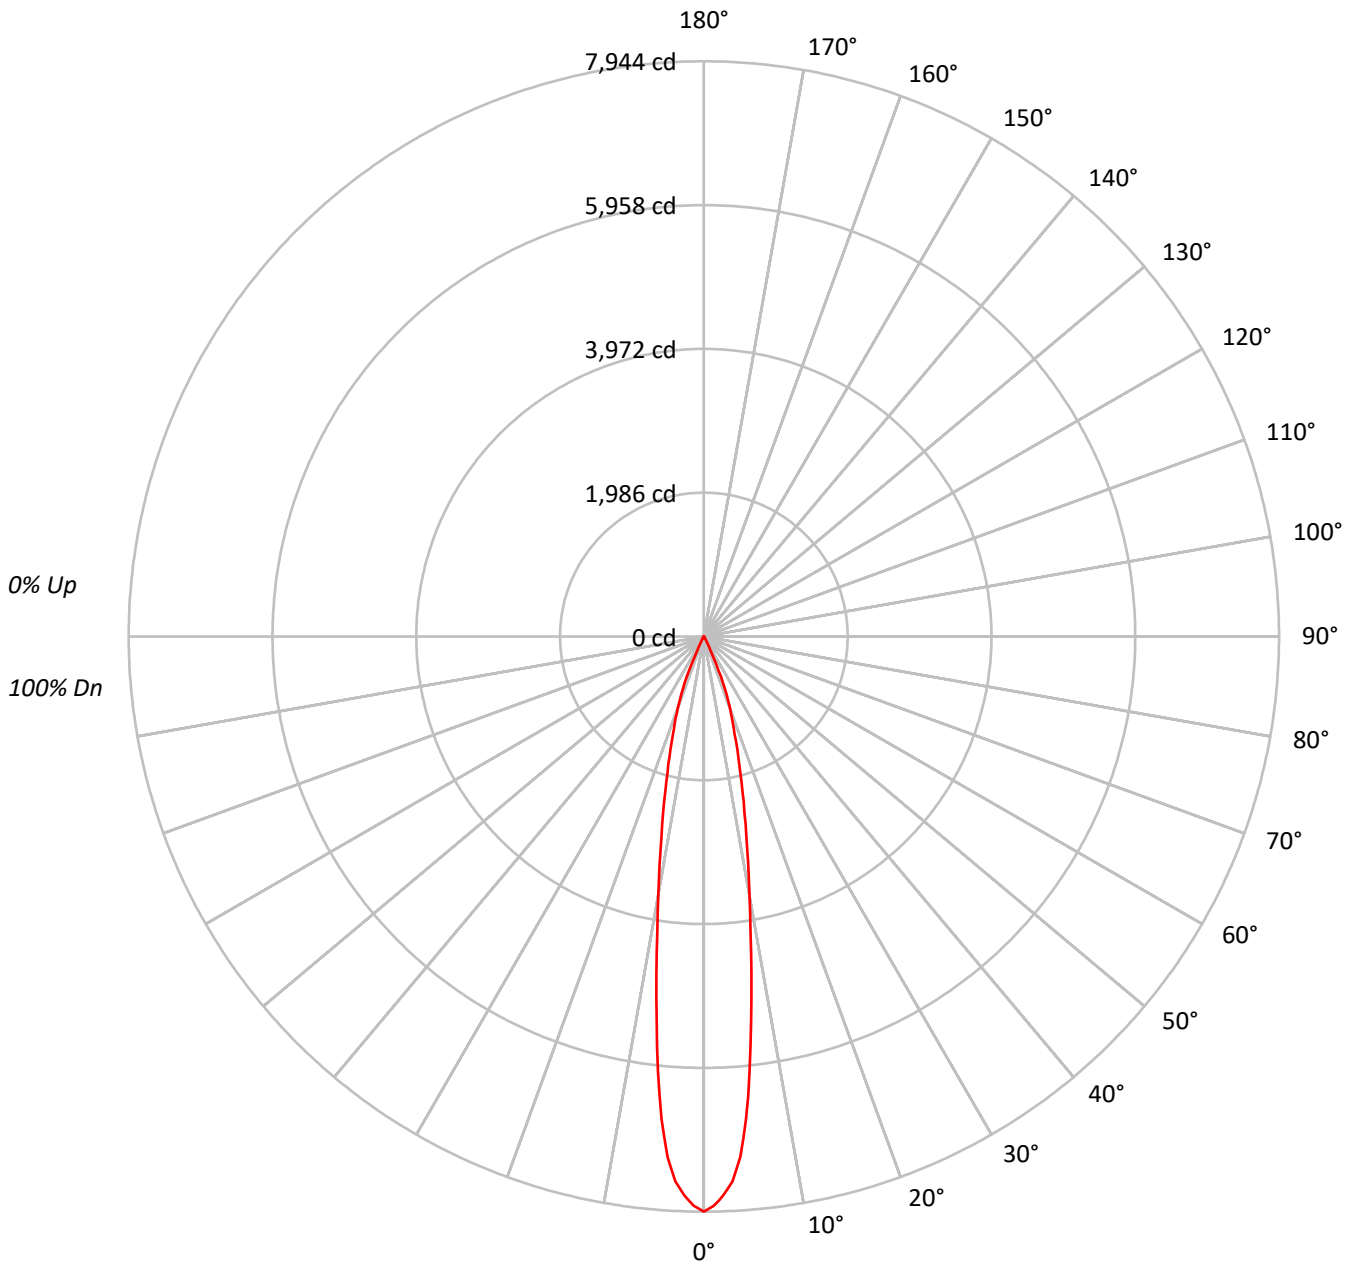



TEST NUMBER: P170602

CATALOG NUMBER: LDA4A13930D010TE LAR15SP 4LFC1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	113	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97	97	97	97
2	112	109	106	103	110	107	104	102	104	102	100	101	99	98	98	97	96	95	95	95	95
3	109	104	101	98	107	103	100	98	101	98	96	98	96	95	96	95	93	92	92	92	92
4	106	101	97	94	104	100	97	94	98	95	93	96	94	92	94	92	91	90	90	90	90
5	103	98	94	91	102	97	93	91	95	92	90	94	91	89	92	90	89	88	88	88	88
6	100	95	91	88	99	94	91	88	93	90	87	92	89	87	91	88	86	85	85	85	85
7	98	92	88	86	97	92	88	86	91	87	85	90	87	85	89	86	84	83	83	83	83
8	96	90	86	83	95	89	86	83	88	85	83	88	85	83	87	84	82	81	81	81	81
9	94	88	84	81	93	87	84	81	86	83	81	86	83	81	85	82	81	80	80	80	80
10	91	85	82	79	91	85	82	79	84	81	79	84	81	79	83	81	79	78	78	78	78

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	979821
5°	828458
10°	454001
15°	247834
20°	138061
25°	31901
30°	6167
35°	1777
40°	628
45°	227
50°	0
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P170602

CATALOG NUMBER: LDA4A13930D010TE LAR15SP 4LFC1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	526.9	42.0
10°-20°	551.2	44.0
20°-30°	165.3	13.2
30°-40°	9.6	0.8
40°-50°	1.1	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1243.4	99.1
0°-40°	1252.9	99.9
0°-60°	1254.1	100.0
0°-90°	1254.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1254.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	7944	
5°	6691	527
15°	1941	551
25°	234	165
35°	12	10
45°	1	1
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P170602

CATALOG NUMBER: LDA4A13930D010TE LAR15SP 4LFC1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	7943.7
1°	7865.5
2°	7724.4
3°	7535.3
4°	7208.3
5°	6691.0
6°	6050.8
7°	5354.2
8°	4706.8
9°	4115.3
10°	3624.8
11°	3200.1
12°	2822.5
13°	2496.2
14°	2204.1
15°	1940.8
17.5°	1410.3
20°	1051.8
22.5°	693.3
25°	234.4
27.5°	81.4
30°	43.3
32.5°	21.7
35°	11.8
37.5°	6.6
40°	3.9
42.5°	2.0
45°	1.3
47.5°	0.7
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P170602

CATALOG NUMBER: LDA4A13930D010TE LAR15SP 4LFC1

**CANDELA DISTRIBUTION (continued):**

0°  
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)