

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P170439

Luminaire Tested: **LDA4A13835D010TE LAR25NF 4LA1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P170439  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P25629)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LDA4A13835D010TE LAR25NF 4LA1  
Description: PORTFOLIO 4" Adjustable Reflector, Self-flange Trim Ring, 25° Narrow Flood Optic, at 0° tilt  
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1398.0 lumens  
Efficiency: N/A  
Efficacy: 62.8 lumens/watt  
Spacing Criteria (0/90/45): 0.43 / 0.43 / 0.45  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct


Input Watts (W): 22.27  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P170439

CATALOG NUMBER: LDA4A13835D010TE LAR25NF 4LA1

### Luminous Intensity Polar Plot

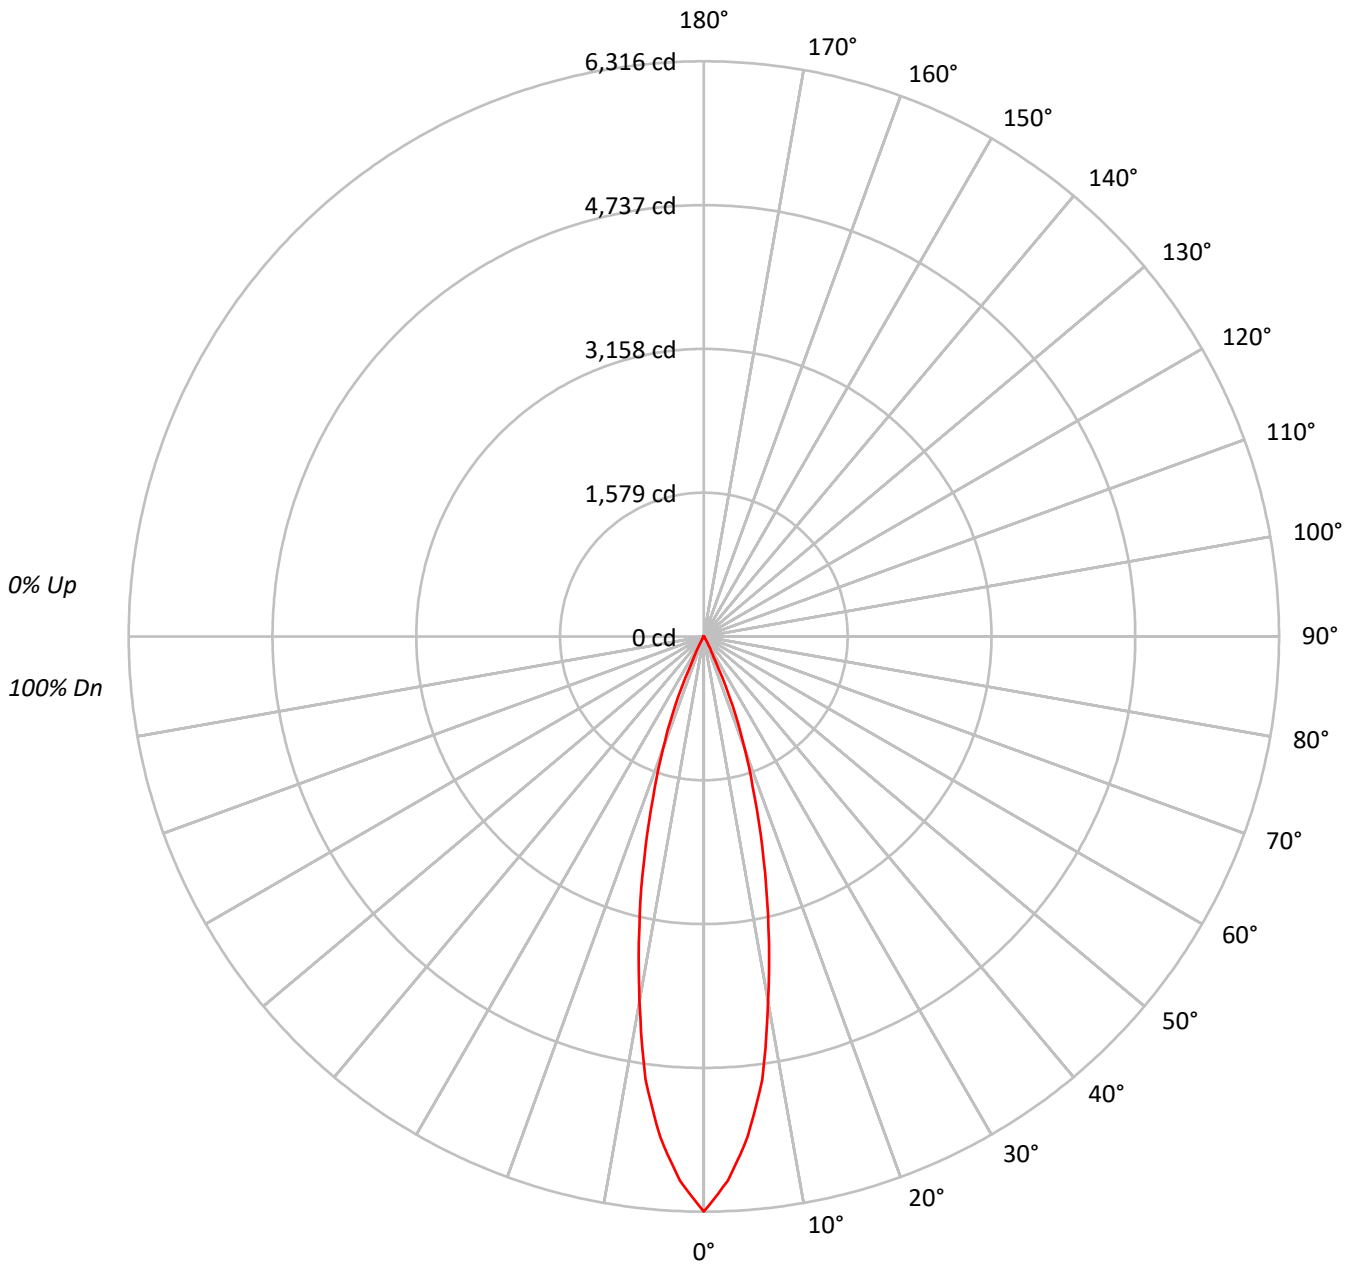



TEST NUMBER: P170439

CATALOG NUMBER: LDA4A13835D010TE LAR25NF 4LA1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	115	113	111	110	113	111	109	108	107	106	105	103	102	101	100	99	99	97	97	97	97																
2	112	108	105	103	109	106	104	102	103	101	99	100	99	97	98	96	95	94	94	94	94																
3	108	104	100	97	106	102	99	97	100	97	95	98	96	94	96	94	92	91	91	91	91																
4	105	100	96	93	103	99	95	93	97	94	92	95	93	91	93	91	90	88	88	88	88																
5	102	96	92	89	101	95	92	89	94	91	88	92	90	88	91	89	87	86	86	86	86																
6	99	93	89	86	98	93	89	86	91	88	85	90	87	85	89	86	84	83	83	83	83																
7	97	90	86	83	95	90	86	83	89	85	83	88	85	83	87	84	82	81	81	81	81																
8	94	88	84	81	93	87	83	81	86	83	81	85	82	80	85	82	80	79	79	79	79																
9	92	85	81	79	91	85	81	79	84	81	78	83	80	78	83	80	78	77	77	77	77																
10	89	83	79	76	89	83	79	76	82	79	76	81	78	76	81	78	76	75	75	75	75																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	778989
5°	682850
10°	509310
15°	323992
20°	171808
25°	38774
30°	9315
35°	2680
40°	902
45°	279
50°	154
55°	172
60°	197
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P170439

CATALOG NUMBER: LDA4A13835D010TE LAR25NF 4LA1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	482.4	34.5
10°-20°	693.1	49.6
20°-30°	205.0	14.7
30°-40°	14.6	1.0
40°-50°	1.7	0.1
50°-60°	0.7	0.1
60°-70°	0.5	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1380.6	98.8
0°-40°	1395.1	99.8
0°-60°	1397.5	100.0
0°-90°	1398.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1398.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	6316	
5°	5515	482
15°	2537	693
25°	285	205
35°	18	15
45°	2	2
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P170439

CATALOG NUMBER: LDA4A13835D010TE LAR25NF 4LA1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	6315.5
2.5°	5983.8
5°	5515.0
7.5°	4905.7
10°	4066.4
12.5°	3277.2
15°	2537.2
17.5°	1848.8
20°	1308.9
22.5°	828.8
25°	284.9
27.5°	124.3
30°	65.4
32.5°	33.1
35°	17.8
37.5°	10.5
40°	5.6
42.5°	3.2
45°	1.6
47.5°	0.8
50°	0.8
52.5°	0.8
55°	0.8
57.5°	0.8
60°	0.8
62.5°	0.8
65°	0.0
67.5°	0.8
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)