

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P170635

Luminaire Tested: **LDA4A13935D010TE LAR25NF 4LFC1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P170635
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26142)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA4A13935D010TE LAR25NF 4LFC1
Description: PORTFOLIO 4" Flat Cone, Self-flange Trim Ring, 25° Narrow Flood Optic, at 0° tilt
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1369.6 lumens
Efficiency: N/A
Efficacy: 61.5 lumens/watt
Spacing Criteria (0/90/45): 0.46 / 0.46 / 0.47
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 22.27
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P170635

CATALOG NUMBER: LDA4A13935D010TE LAR25NF 4LFC1

Luminous Intensity Polar Plot

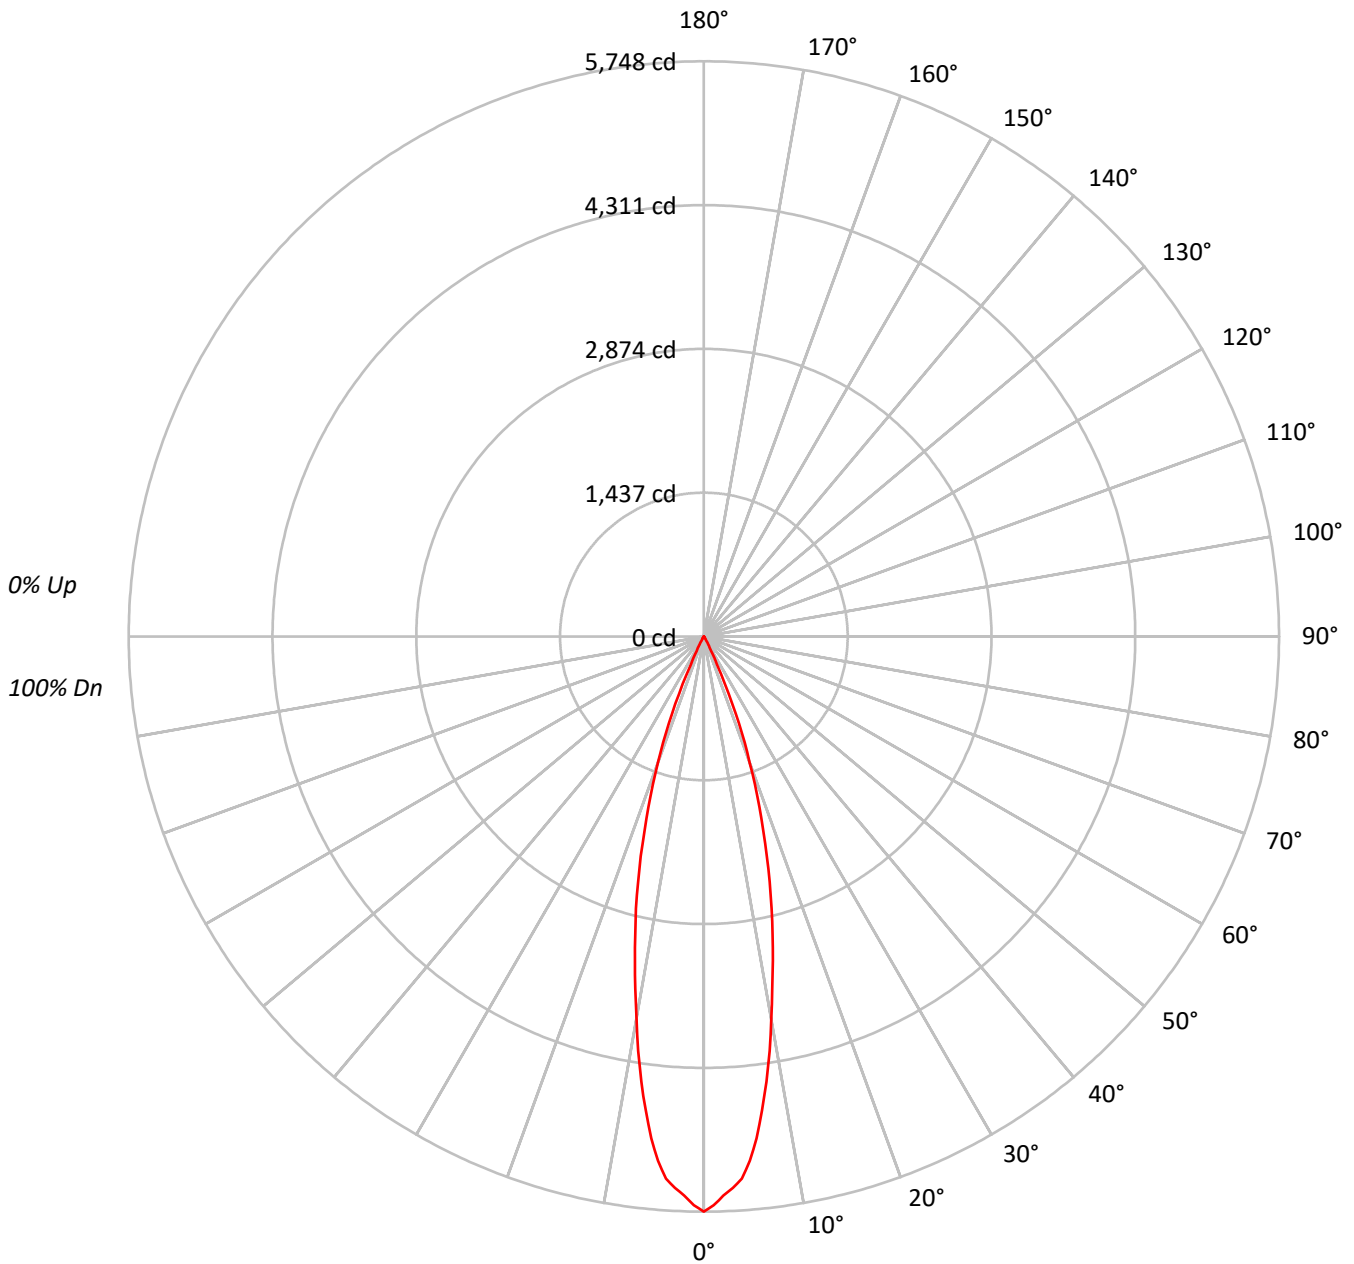



TEST NUMBER: P170635

CATALOG NUMBER: LDA4A13935D010TE LAR25NF 4LFC1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	113	111	110	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	97	97
2	111	108	105	103	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	94	94
3	108	104	100	97	106	102	99	96	100	97	95	98	95	94	95	94	92	91	91	91	91
4	105	100	96	93	103	99	95	92	97	94	91	95	92	90	93	91	89	88	88	88	88
5	102	96	92	89	100	95	92	89	94	91	88	92	89	87	91	89	87	86	86	86	86
6	99	93	89	86	98	92	88	86	91	88	85	90	87	85	89	86	84	83	83	83	83
7	96	90	86	83	95	89	86	83	88	85	83	87	84	82	86	84	82	81	81	81	81
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	79	79	79	79	79
9	91	85	81	78	90	84	81	78	84	80	78	83	80	78	82	79	77	76	76	76	76
10	89	82	79	76	88	82	78	76	81	78	76	81	78	76	80	77	75	74	74	74	74

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	708966
5°	651066
10°	486340
15°	323954
20°	175484
25°	41863
30°	9799
35°	2786
40°	966
45°	349
50°	134
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P170635

CATALOG NUMBER: LDA4A13935D010TE LAR25NF 4LFC1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	455.7	33.3
10°-20°	687.1	50.2
20°-30°	209.8	15.3
30°-40°	15.1	1.1
40°-50°	1.8	0.1
50°-60°	0.1	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1352.7	98.8
0°-40°	1367.8	99.9
0°-60°	1369.6	100.0
0°-90°	1369.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1369.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5748	
5°	5258	456
15°	2537	687
25°	308	210
35°	18	15
45°	2	2
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P170635

CATALOG NUMBER: LDA4A13935D010TE LAR25NF 4LFC1

CANDELA DISTRIBUTION (FULL):

	0°
0°	5747.8
1°	5683.0
2°	5589.7
3°	5519.6
4°	5430.3
5°	5258.3
6°	5042.0
7°	4771.5
8°	4492.3
9°	4194.6
10°	3883.0
11°	3586.0
12°	3314.2
13°	3053.5
14°	2802.1
15°	2536.9
17.5°	1905.8
20°	1336.9
22.5°	834.2
25°	307.6
27.5°	124.4
30°	68.8
32.5°	34.4
35°	18.5
37.5°	10.6
40°	6.0
42.5°	3.3
45°	2.0
47.5°	0.7
50°	0.7
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P170635

CATALOG NUMBER: LDA4A13935D010TE LAR25NF 4LFC1

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)