

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P170571

Luminaire Tested: **LDA4A13935D010TE LAR35FL 4LAL1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P170571
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26146)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA4A13935D010TE LAR35FL 4LAL1
Description: PORTFOLIO 4" Lensed Adjustable, Self-flange Trim Ring, 35° Flood Optic, at 0° tilt
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1292.3 lumens
Efficiency: N/A
Efficacy: 58.0 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.55
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 22.27
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P170571

CATALOG NUMBER: LDA4A13935D010TE LAR35FL 4LAL1

Luminous Intensity Polar Plot

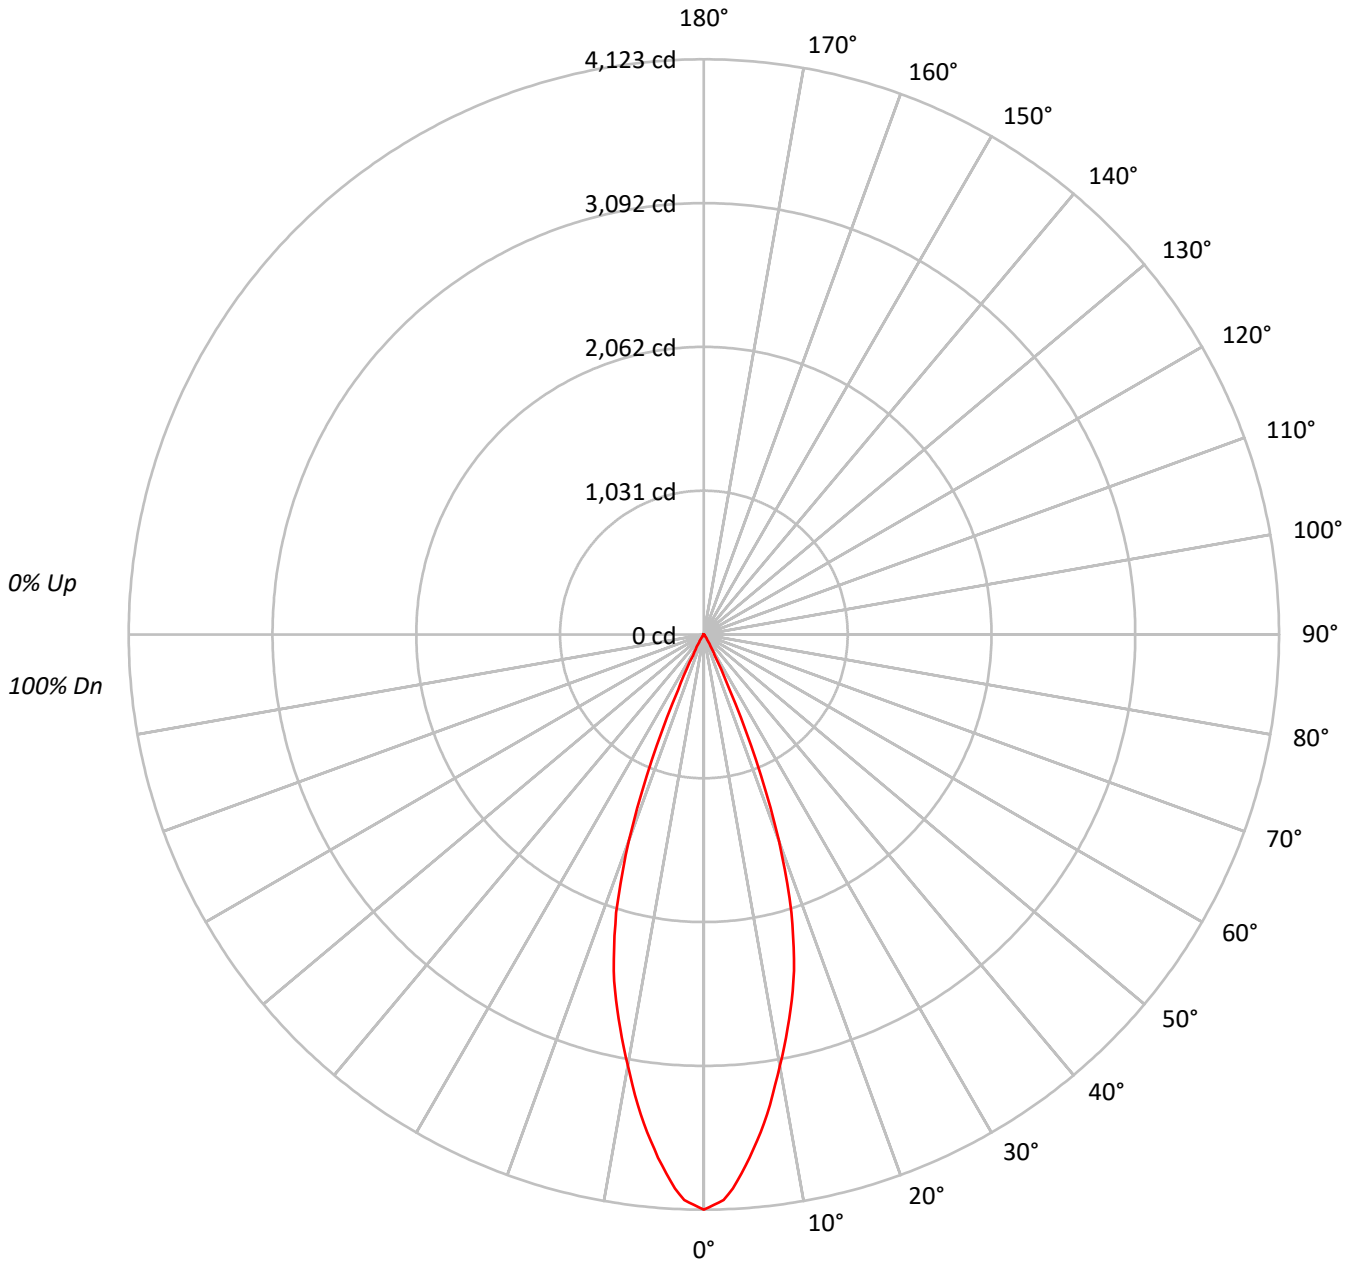



TEST NUMBER: P170571

CATALOG NUMBER: LDA4A13935D010TE LAR35FL 4LAL1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	111	109	113	111	109	107	107	105	104	103	102	101	100	99	98	96
2	111	107	104	102	109	106	103	100	102	100	98	100	98	96	97	96	94	93
3	107	103	99	96	105	101	98	95	99	96	94	96	94	92	94	92	91	90
4	104	98	94	91	102	97	93	91	95	92	90	93	91	89	92	89	88	86
5	101	94	90	87	99	94	90	87	92	89	86	90	88	85	89	87	85	83
6	97	91	87	83	96	90	86	83	89	85	83	88	85	82	86	84	82	81
7	94	88	83	80	93	87	83	80	86	82	80	85	82	79	84	81	79	78
8	92	85	80	77	91	84	80	77	83	80	77	82	79	77	82	79	76	75
9	89	82	78	75	88	82	77	75	81	77	74	80	77	74	79	76	74	73
10	86	79	75	72	86	79	75	72	78	75	72	78	74	72	77	74	72	71

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	508542
5°	466158
10°	393155
15°	318795
20°	206448
25°	59529
30°	13004
35°	3689
40°	1385
45°	576
50°	249
55°	151
60°	173
65°	204
70°	252
75°	0
80°	0
85°	0



TEST NUMBER: P170571

CATALOG NUMBER: LDA4A13935D010TE LAR35FL 4LAL1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	339.2	26.3
10°-20°	669.8	51.8
20°-30°	258.0	20.0
30°-40°	20.4	1.6
40°-50°	2.9	0.2
50°-60°	0.7	0.1
60°-70°	0.7	0.1
70°-80°	0.3	0.0
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1267.1	98.0
0°-40°	1287.5	99.6
0°-60°	1291.1	99.9
0°-90°	1292.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1292.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4123	
5°	3765	339
15°	2496	670
25°	437	258
35°	24	20
45°	3	3
55°	1	1
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P170571

CATALOG NUMBER: LDA4A13935D010TE LAR35FL 4LAL1

CANDELA DISTRIBUTION (FULL):

	0°
0°	4122.9
1°	4089.8
2°	4056.1
3°	3976.7
4°	3872.1
5°	3764.9
6°	3647.1
7°	3532.7
8°	3406.3
9°	3269.3
10°	3139.0
11°	3014.6
12°	2884.9
13°	2761.2
14°	2634.8
15°	2496.5
17.5°	2090.2
20°	1572.8
22.5°	972.0
25°	437.4
27.5°	168.1
30°	91.3
32.5°	47.0
35°	24.5
37.5°	14.6
40°	8.6
42.5°	5.3
45°	3.3
47.5°	2.0
50°	1.3
52.5°	0.7
55°	0.7
57.5°	0.7
60°	0.7
62.5°	0.7
65°	0.7
67.5°	0.7
70°	0.7
72.5°	0.0
75°	0.0
77.5°	0.7
80°	0.0
82.5°	0.0



TEST NUMBER: P170571

CATALOG NUMBER: LDA4A13935D010TE LAR35FL 4LAL1

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.7



(END OF REPORT)