

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P170486

Luminaire Tested: **LDA4A18830D010TE LAR15SP 4LAL1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P170486
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26144)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA4A18830D010TE LAR15SP 4LAL1
Description: PORTFOLIO 4" Lensed Adjustable, Self-flange Trim Ring, 15° Spot
Optic, at 0° tilt
Light Source: (1) HIGH LUMEN LED 80CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1663.7 lumens
Efficiency: N/A
Efficacy: 57.1 lumens/watt
Spacing Criteria (0/90/45): 0.29 / 0.29 / 0.34
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 29.12
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P170486

CATALOG NUMBER: LDA4A18830D010TE LAR15SP 4LAL1

Luminous Intensity Polar Plot

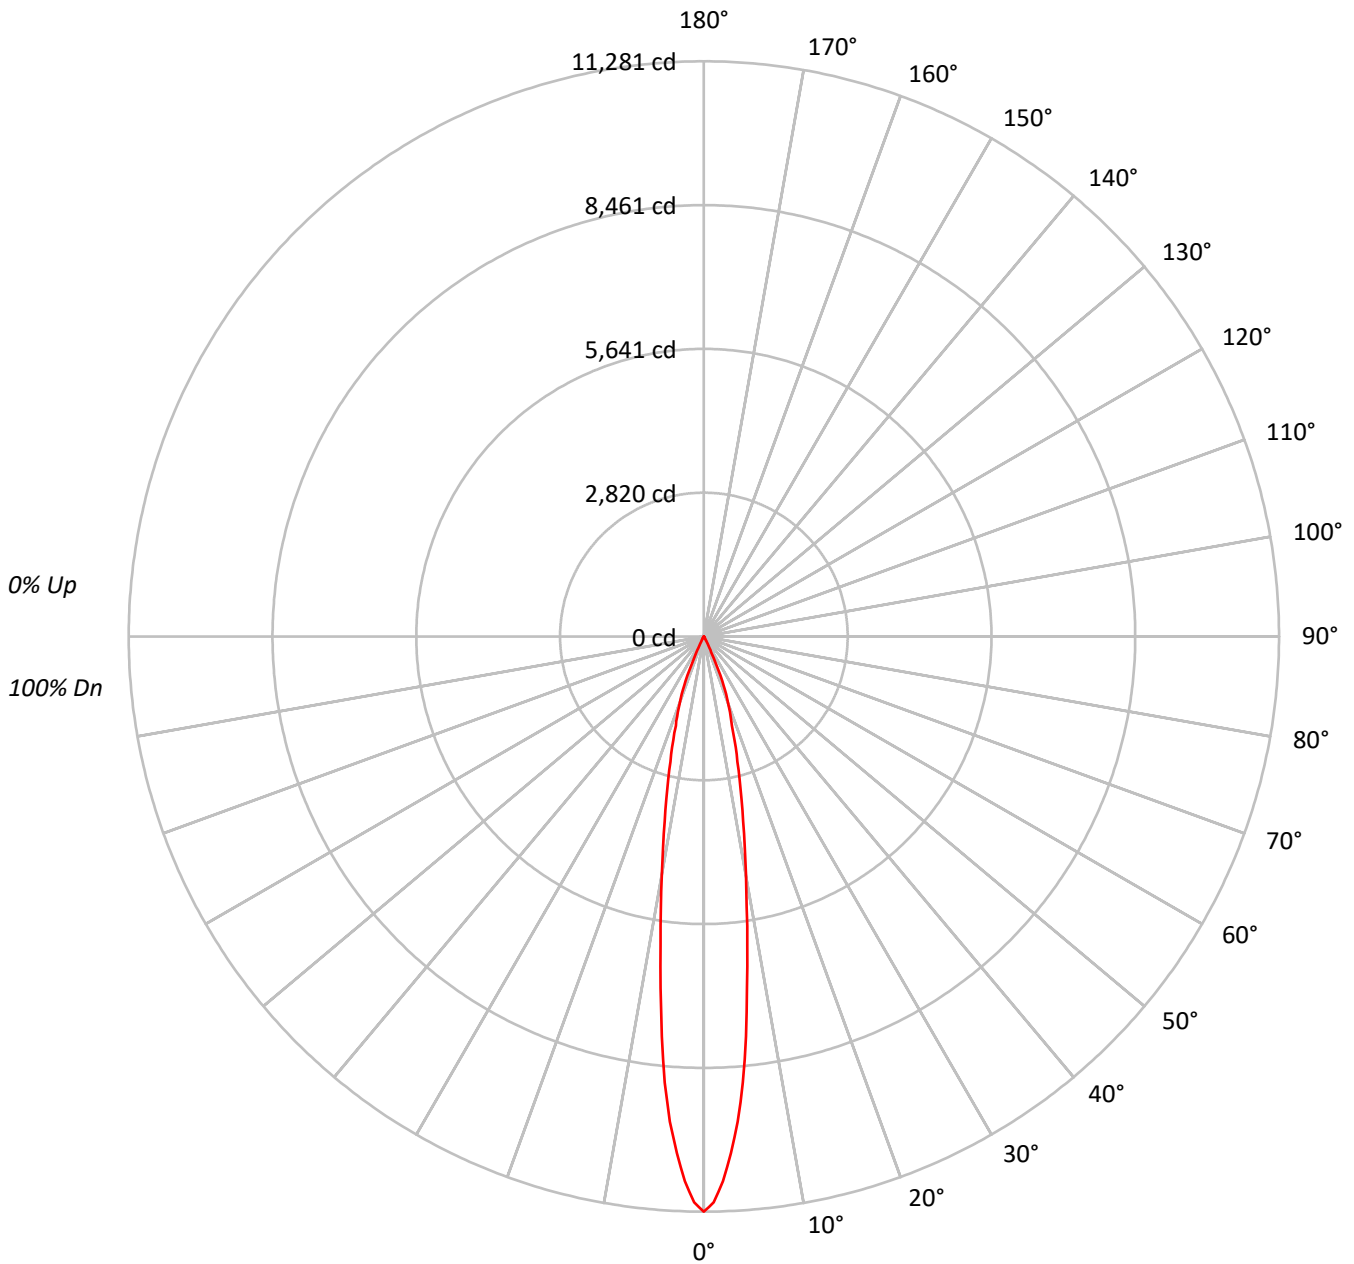



TEST NUMBER: P170486

CATALOG NUMBER: LDA4A18830D010TE LAR15SP 4LAL1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	115	113	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97			97																
2	112	108	106	103	110	107	104	102	104	102	100	101	99	98	98	97	96	95			95																
3	109	104	101	98	107	103	100	98	101	98	96	98	96	95	96	95	93	92			92																
4	106	101	97	94	104	100	96	94	98	95	93	96	94	92	94	92	91	90			90																
5	103	97	94	91	102	97	93	90	95	92	90	94	91	89	92	90	88	87			87																
6	100	95	91	88	99	94	90	88	93	89	87	91	89	87	90	88	86	85			85																
7	98	92	88	85	97	91	88	85	90	87	85	89	86	84	88	86	84	83			83																
8	95	89	86	83	95	89	85	83	88	85	83	87	84	82	86	84	82	81			81																
9	93	87	83	81	92	87	83	81	86	83	81	85	82	80	85	82	80	79			79																
10	91	85	81	79	90	85	81	79	84	81	79	83	81	79	83	80	78	78			78																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1391474
5°	1087557
10°	593916
15°	324388
20°	182585
25°	46355
30°	8802
35°	3147
40°	1530
45°	837
50°	192
55°	215
60°	247
65°	292
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P170486

CATALOG NUMBER: LDA4A18830D010TE LAR15SP 4LAL1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	694.3	41.7
10°-20°	721.7	43.4
20°-30°	226.4	13.6
30°-40°	15.9	1.0
40°-50°	3.7	0.2
50°-60°	0.9	0.1
60°-70°	0.9	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1642.3	98.7
0°-40°	1658.3	99.7
0°-60°	1662.9	99.9
0°-90°	1663.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1663.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	11281	
5°	8784	694
15°	2540	722
25°	341	226
35°	21	16
45°	5	4
55°	1	1
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P170486

CATALOG NUMBER: LDA4A18830D010TE LAR15SP 4LAL1

CANDELA DISTRIBUTION (FULL):

	0°
0°	11281.1
1°	11101.3
2°	10691.3
3°	10145.1
4°	9541.0
5°	8783.6
6°	7887.4
7°	6950.2
8°	6107.2
9°	5373.7
10°	4741.9
11°	4189.2
12°	3703.9
13°	3274.8
14°	2888.5
15°	2540.3
17.5°	1834.4
20°	1391.0
22.5°	946.7
25°	340.6
27.5°	114.2
30°	61.8
32.5°	34.3
35°	20.9
37.5°	14.3
40°	9.5
42.5°	6.7
45°	4.8
47.5°	2.9
50°	1.0
52.5°	1.0
55°	1.0
57.5°	1.0
60°	1.0
62.5°	1.0
65°	1.0
67.5°	1.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P170486

CATALOG NUMBER: LDA4A18830D010TE LAR15SP 4LAL1

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)