

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P170583

Luminaire Tested: **LDA4A18835D010TE LAR15SP 4LFC1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P170583
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26141)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA4A18835D010TE LAR15SP 4LFC1
Description: PORTFOLIO 4" Flat Cone, Self-flange Trim Ring, 15° Spot Optic, at 0° tilt
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1910.0 lumens
Efficiency: N/A
Efficacy: 65.6 lumens/watt
Spacing Criteria (0/90/45): 0.32 / 0.32 / 0.36
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 29.12
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P170583

CATALOG NUMBER: LDA4A18835D010TE LAR15SP 4LFC1

Luminous Intensity Polar Plot

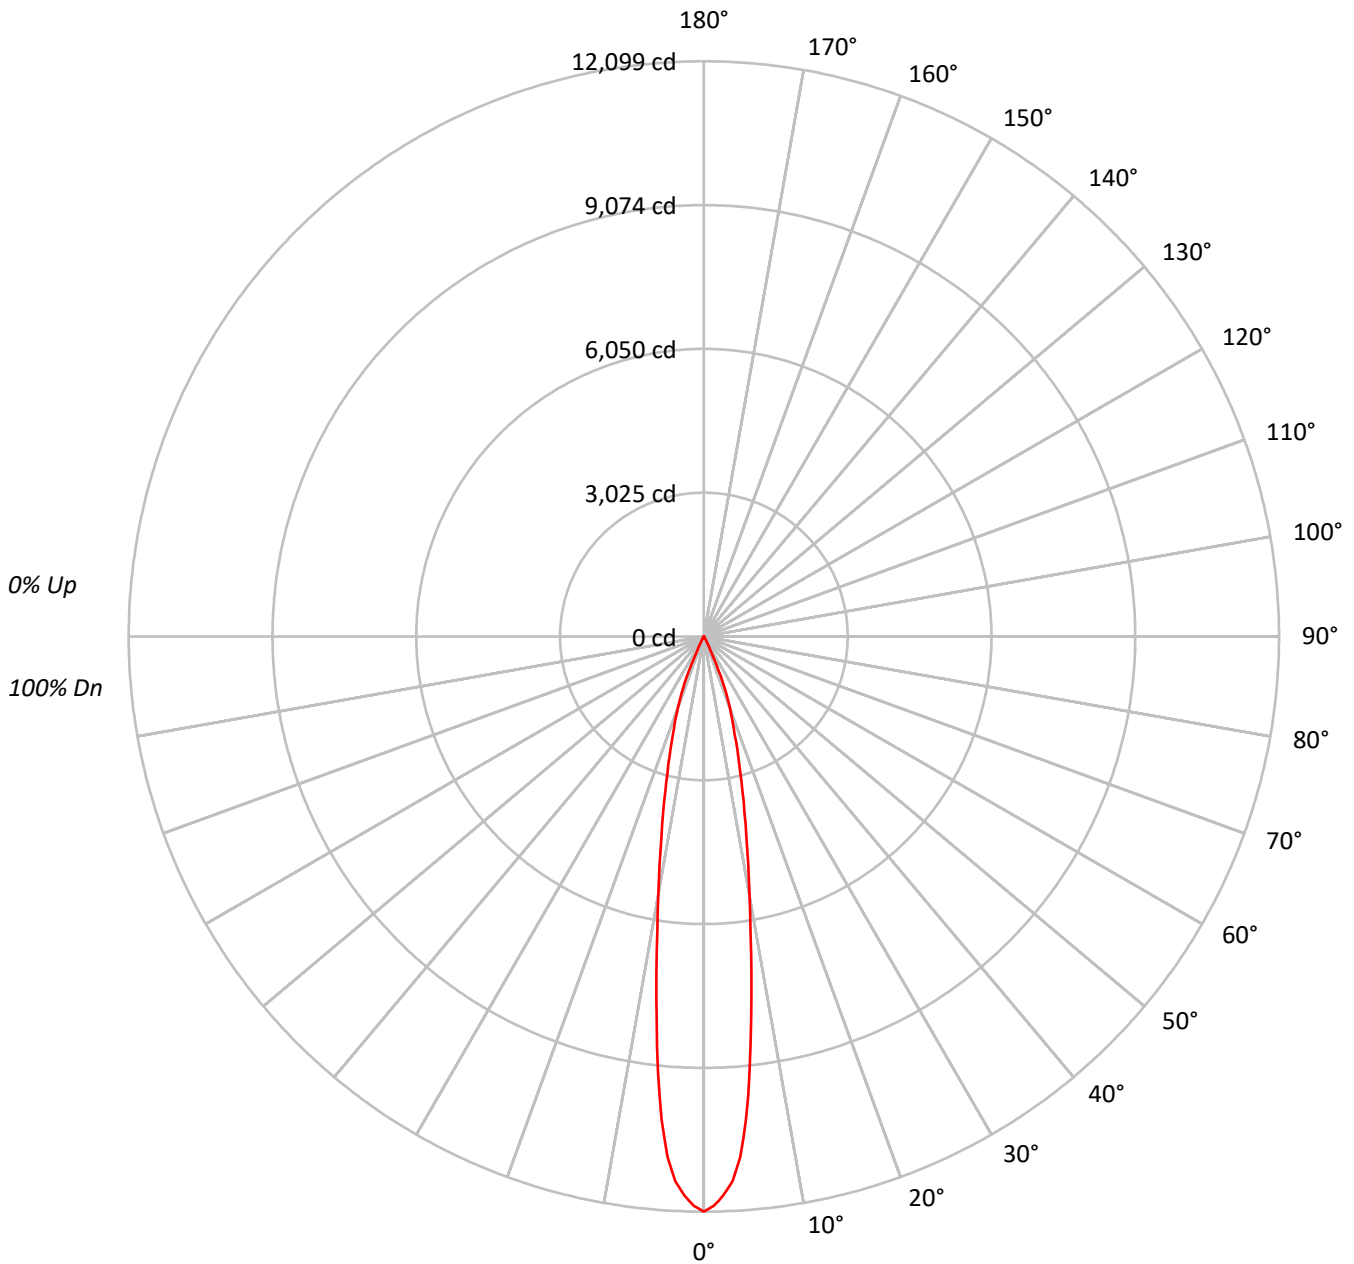



TEST NUMBER: P170583

CATALOG NUMBER: LDA4A18835D010TE LAR15SP 4LFC1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	99	97
1	115	113	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97	97	96	95
2	112	109	106	103	110	107	104	102	104	102	100	101	99	98	98	97	96	95	95	94	92
3	109	104	101	98	107	103	100	98	101	98	96	98	96	95	96	95	93	92	92	91	90
4	106	101	97	94	104	100	97	94	98	95	93	96	94	92	94	92	91	90	89	88	88
5	103	98	94	91	102	97	93	91	95	92	90	94	91	89	92	90	89	88	87	86	85
6	100	95	91	88	99	94	91	88	93	90	87	92	89	87	91	88	86	85	84	83	83
7	98	92	88	86	97	92	88	86	91	87	85	90	87	85	89	86	84	83	82	81	81
8	96	90	86	83	95	89	86	83	88	85	83	88	85	83	87	84	82	81	80	79	78
9	94	88	84	81	93	87	84	81	86	83	81	86	83	81	85	82	81	80	79	78	77
10	91	85	82	79	91	85	82	79	84	81	79	84	81	79	83	81	79	78	77	76	75

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1492322
5°	1261780
10°	691484
15°	377459
20°	210281
25°	48587
30°	9400
35°	2710
40°	966
45°	349
50°	0
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P170583

CATALOG NUMBER: LDA4A18835D010TE LAR15SP 4LFC1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	802.5	42.0
10°-20°	839.5	44.0
20°-30°	251.7	13.2
30°-40°	14.6	0.8
40°-50°	1.7	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1893.8	99.1
0°-40°	1908.3	99.9
0°-60°	1910.0	100.0
0°-90°	1910.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1910.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	12099	
5°	10191	802
15°	2956	840
25°	357	252
35°	18	15
45°	2	2
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P170583

CATALOG NUMBER: LDA4A18835D010TE LAR15SP 4LFC1

CANDELA DISTRIBUTION (FULL):

	0°
0°	12098.7
1°	11979.7
2°	11764.7
3°	11476.7
4°	10978.7
5°	10190.7
6°	9215.8
7°	8154.8
8°	7168.8
9°	6267.8
10°	5520.9
11°	4873.9
12°	4298.9
13°	3801.9
14°	3356.9
15°	2955.9
17.5°	2147.9
20°	1602.0
22.5°	1056.0
25°	357.0
27.5°	124.0
30°	66.0
32.5°	33.0
35°	18.0
37.5°	10.0
40°	6.0
42.5°	3.0
45°	2.0
47.5°	1.0
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P170583

CATALOG NUMBER: LDA4A18835D010TE LAR15SP 4LFC1

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)