

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P170651

Luminaire Tested: **LDA4A18935D010TE LAR35FL 4LFC1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P170651
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26143)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA4A18935D010TE LAR35FL 4LFC1
Description: PORTFOLIO 4" Flat Cone, Self-flange Trim Ring, 35° Flood Optic, at 0° tilt
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1764.8 lumens
Efficiency: N/A
Efficacy: 60.6 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.56
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 29.12
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P170651

CATALOG NUMBER: LDA4A18935D010TE LAR35FL 4LFC1

Luminous Intensity Polar Plot

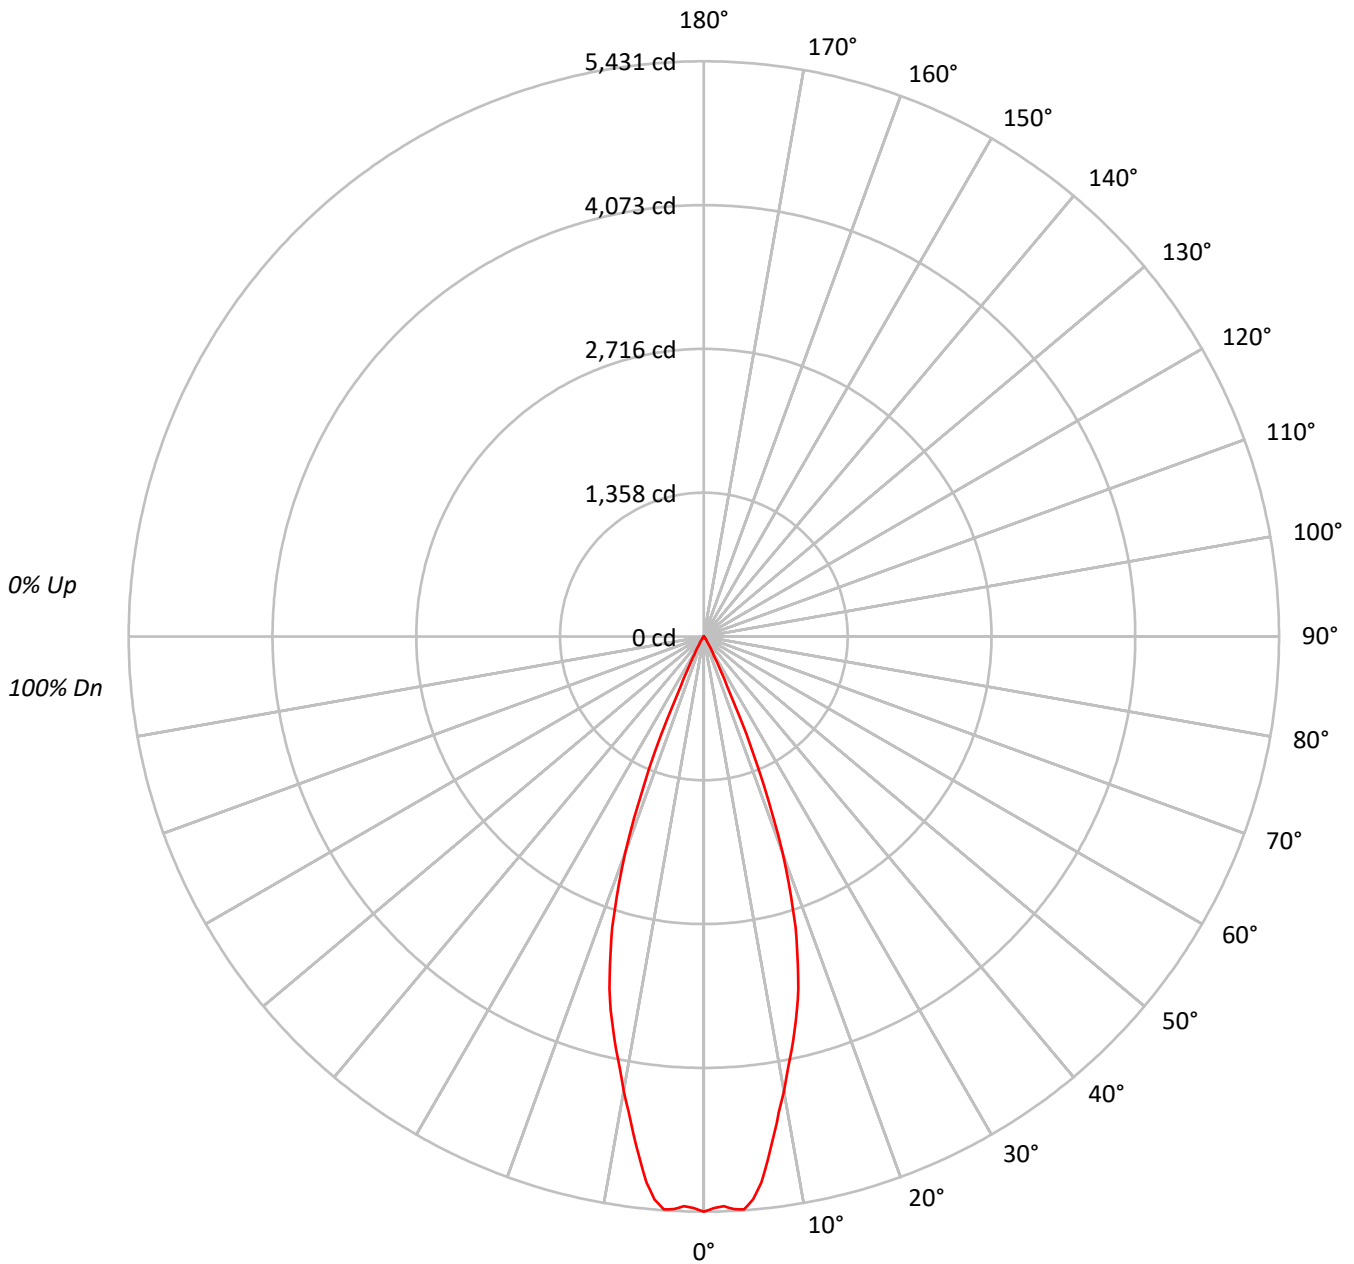



TEST NUMBER: P170651

CATALOG NUMBER: LDA4A18935D010TE LAR35FL 4LFC1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	113	111	109	113	111	109	107	107	105	104	103	102	101	100	99	98	96	96	96	96
2	111	107	104	102	109	106	103	101	103	100	99	100	98	96	97	96	94	93	93	93	93
3	107	103	99	96	106	101	98	95	99	96	94	97	94	92	95	93	91	90	90	90	90
4	104	99	94	91	102	97	94	91	95	92	90	94	91	89	92	90	88	87	87	87	87
5	101	95	91	87	99	94	90	87	92	89	86	91	88	86	89	87	85	84	84	84	84
6	98	91	87	84	96	91	87	84	89	86	83	88	85	83	87	84	82	81	81	81	81
7	95	88	84	81	94	87	83	81	86	83	80	85	82	80	84	82	79	78	78	78	78
8	92	85	81	78	91	85	81	78	84	80	78	83	80	77	82	79	77	76	76	76	76
9	89	82	78	75	88	82	78	75	81	78	75	80	77	75	80	77	75	74	74	74	74
10	87	80	76	73	86	79	76	73	79	75	73	78	75	72	78	75	72	71	71	71	71

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	669878
5°	660860
10°	545620
15°	439903
20°	284667
25°	69491
30°	16692
35°	4201
40°	1320
45°	279
50°	154
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P170651

CATALOG NUMBER: LDA4A18935D010TE LAR35FL 4LFC1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	472.8	26.8
10°-20°	923.9	52.4
20°-30°	341.9	19.4
30°-40°	24.1	1.4
40°-50°	2.1	0.1
50°-60°	0.1	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1738.6	98.5
0°-40°	1762.7	99.9
0°-60°	1764.8	100.0
0°-90°	1764.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1764.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5431	
5°	5337	473
15°	3445	924
25°	511	342
35°	28	24
45°	2	2
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P170651

CATALOG NUMBER: LDA4A18935D010TE LAR35FL 4LFC1

CANDELA DISTRIBUTION (FULL):

	0°
0°	5430.9
1°	5398.9
2°	5381.7
3°	5415.3
4°	5423.5
5°	5337.4
6°	5184.2
7°	4970.2
8°	4753.9
9°	4539.9
10°	4356.3
11°	4158.8
12°	3984.2
13°	3810.5
14°	3634.2
15°	3444.9
17.5°	2877.7
20°	2168.7
22.5°	1341.7
25°	510.6
27.5°	209.8
30°	117.2
32.5°	55.7
35°	27.9
37.5°	14.8
40°	8.2
42.5°	4.1
45°	1.6
47.5°	0.8
50°	0.8
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P170651

CATALOG NUMBER: LDA4A18935D010TE LAR35FL 4LFC1

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)