

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P170392

Luminaire Tested: **LDA4A18840D010TE LAR15SP 4LA1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P170392  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P25628)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LDA4A18840D010TE LAR15SP 4LA1  
Description: PORTFOLIO 4" Adjustable Reflector, Self-flange Trim Ring, 15° Spot  
Optic, at 0° tilt  
Light Source: (1) HIGH LUMEN LED 80CRI / 4000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1636.9 lumens  
Efficiency: N/A  
Efficacy: 56.2 lumens/watt  
Spacing Criteria (0/90/45): 0.32 / 0.32 / 0.35  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct

Input Watts (W): 29.12  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P170392  
CATALOG NUMBER: LDA4A18840D010TE LAR15SP 4LA1

### Luminous Intensity Polar Plot

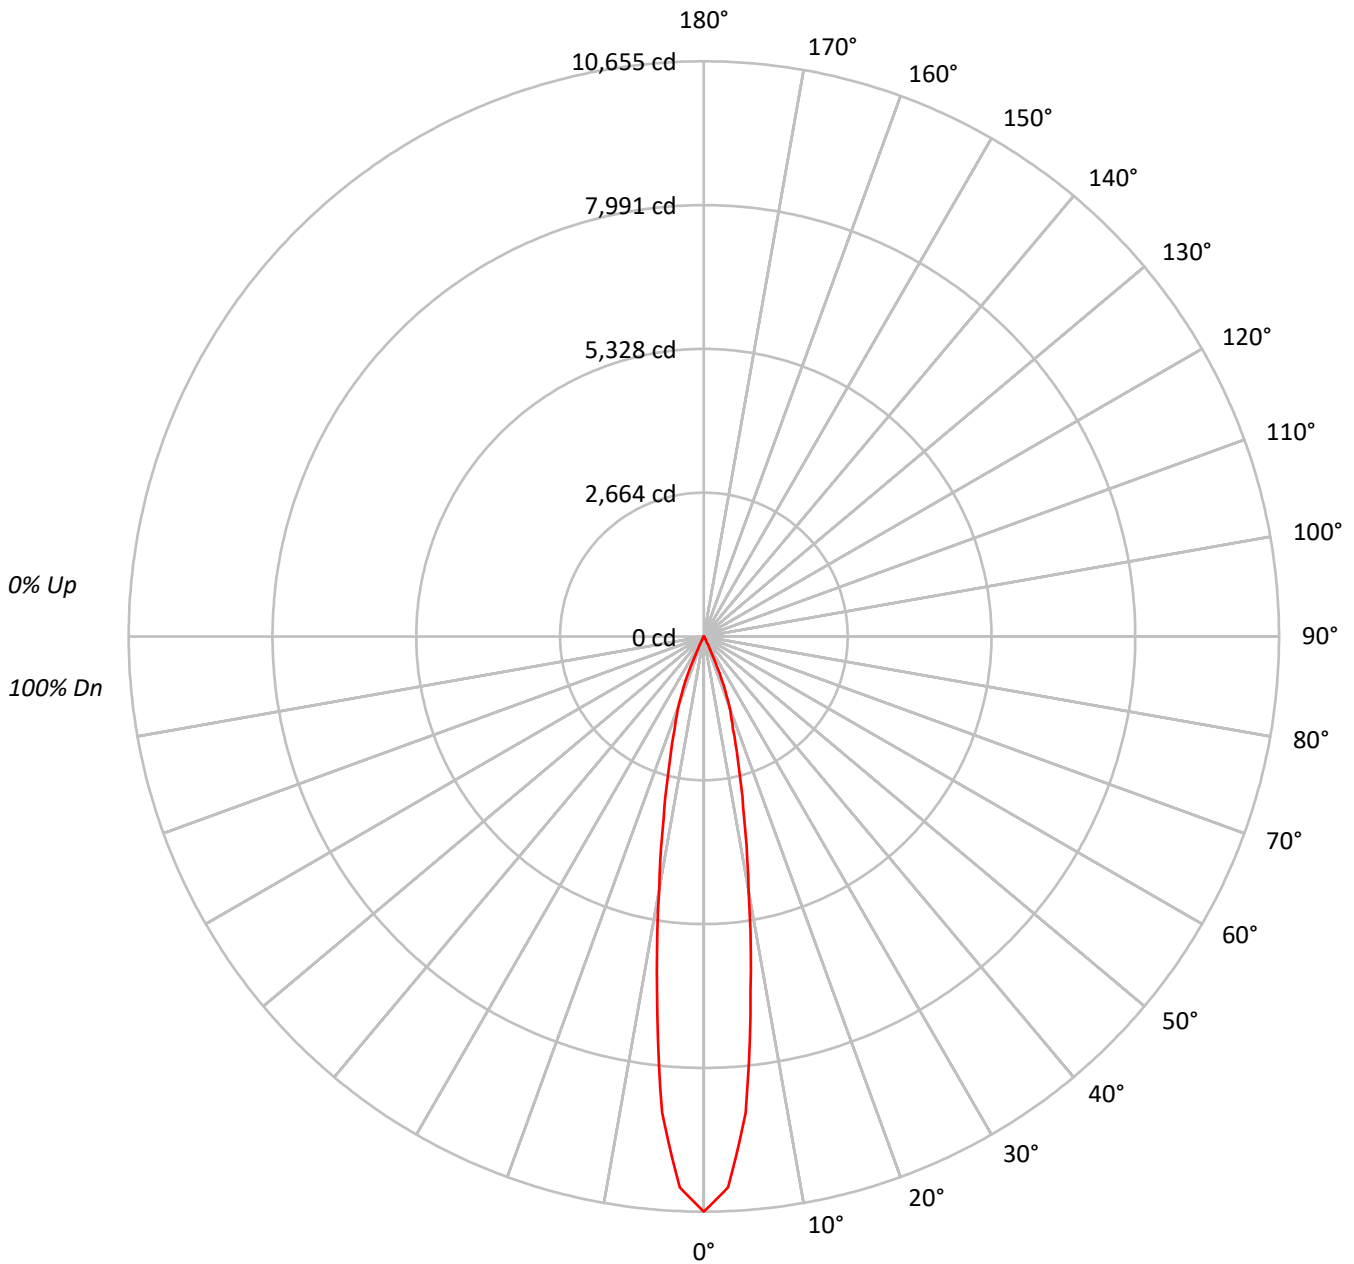



TEST NUMBER: P170392

CATALOG NUMBER: LDA4A18840D010TE LAR15SP 4LA1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97																			
2	112	109	106	104	110	107	105	102	104	102	100	101	100	98	98	97	96	95																			
3	109	105	101	99	107	103	100	98	101	98	96	99	97	95	97	95	94	92																			
4	106	101	97	95	104	100	97	94	98	95	93	96	94	92	95	93	91	90																			
5	103	98	94	91	102	97	94	91	95	92	90	94	91	89	93	90	89	88																			
6	101	95	91	89	99	94	91	88	93	90	88	92	89	87	91	88	87	86																			
7	98	92	89	86	97	92	88	86	91	88	85	90	87	85	89	86	85	84																			
8	96	90	86	84	95	90	86	84	89	86	83	88	85	83	87	85	83	82																			
9	94	88	84	82	93	87	84	82	87	84	81	86	83	81	85	83	81	80																			
10	92	86	82	80	91	85	82	80	85	82	80	84	81	79	84	81	79	78																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1314272
5°	1096447
10°	596120
15°	316650
20°	180380
25°	35317
30°	7307
35°	2168
40°	821
45°	366
50°	192
55°	215
60°	247
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P170392

CATALOG NUMBER: LDA4A18840D010TE LAR15SP 4LA1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	702.1	42.9
10°-20°	715.2	43.7
20°-30°	205.2	12.5
30°-40°	11.6	0.7
40°-50°	1.7	0.1
50°-60°	0.9	0.1
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1622.5	99.1
0°-40°	1634.1	99.8
0°-60°	1636.8	100.0
0°-90°	1636.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1636.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	10655	
5°	8855	702
15°	2480	715
25°	260	205
35°	14	12
45°	2	2
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P170392

CATALOG NUMBER: LDA4A18840D010TE LAR15SP 4LA1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	10655.2
2.5°	10214.2
5°	8855.4
7.5°	6634.1
10°	4759.5
12.5°	3432.4
15°	2479.7
17.5°	1794.7
20°	1374.2
22.5°	866.6
25°	259.5
27.5°	99.5
30°	51.3
32.5°	26.7
35°	14.4
37.5°	8.2
40°	5.1
42.5°	3.1
45°	2.1
47.5°	1.0
50°	1.0
52.5°	1.0
55°	1.0
57.5°	1.0
60°	1.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)