

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P170546

Luminaire Tested: **LDA4A28930D010TE LAR25NF 4LAL1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P170546
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26145)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA4A28930D010TE LAR25NF 4LAL1
Description: PORTFOLIO 4" Lensed Adjustable, Self-flange Trim Ring, 25° Narrow Flood Optic, at 0° tilt
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2403.5 lumens
Efficiency: N/A
Efficacy: 54.0 lumens/watt
Spacing Criteria (0/90/45): 0.41 / 0.41 / 0.45
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 44.49
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P170546

CATALOG NUMBER: LDA4A28930D010TE LAR25NF 4LAL1

Luminous Intensity Polar Plot

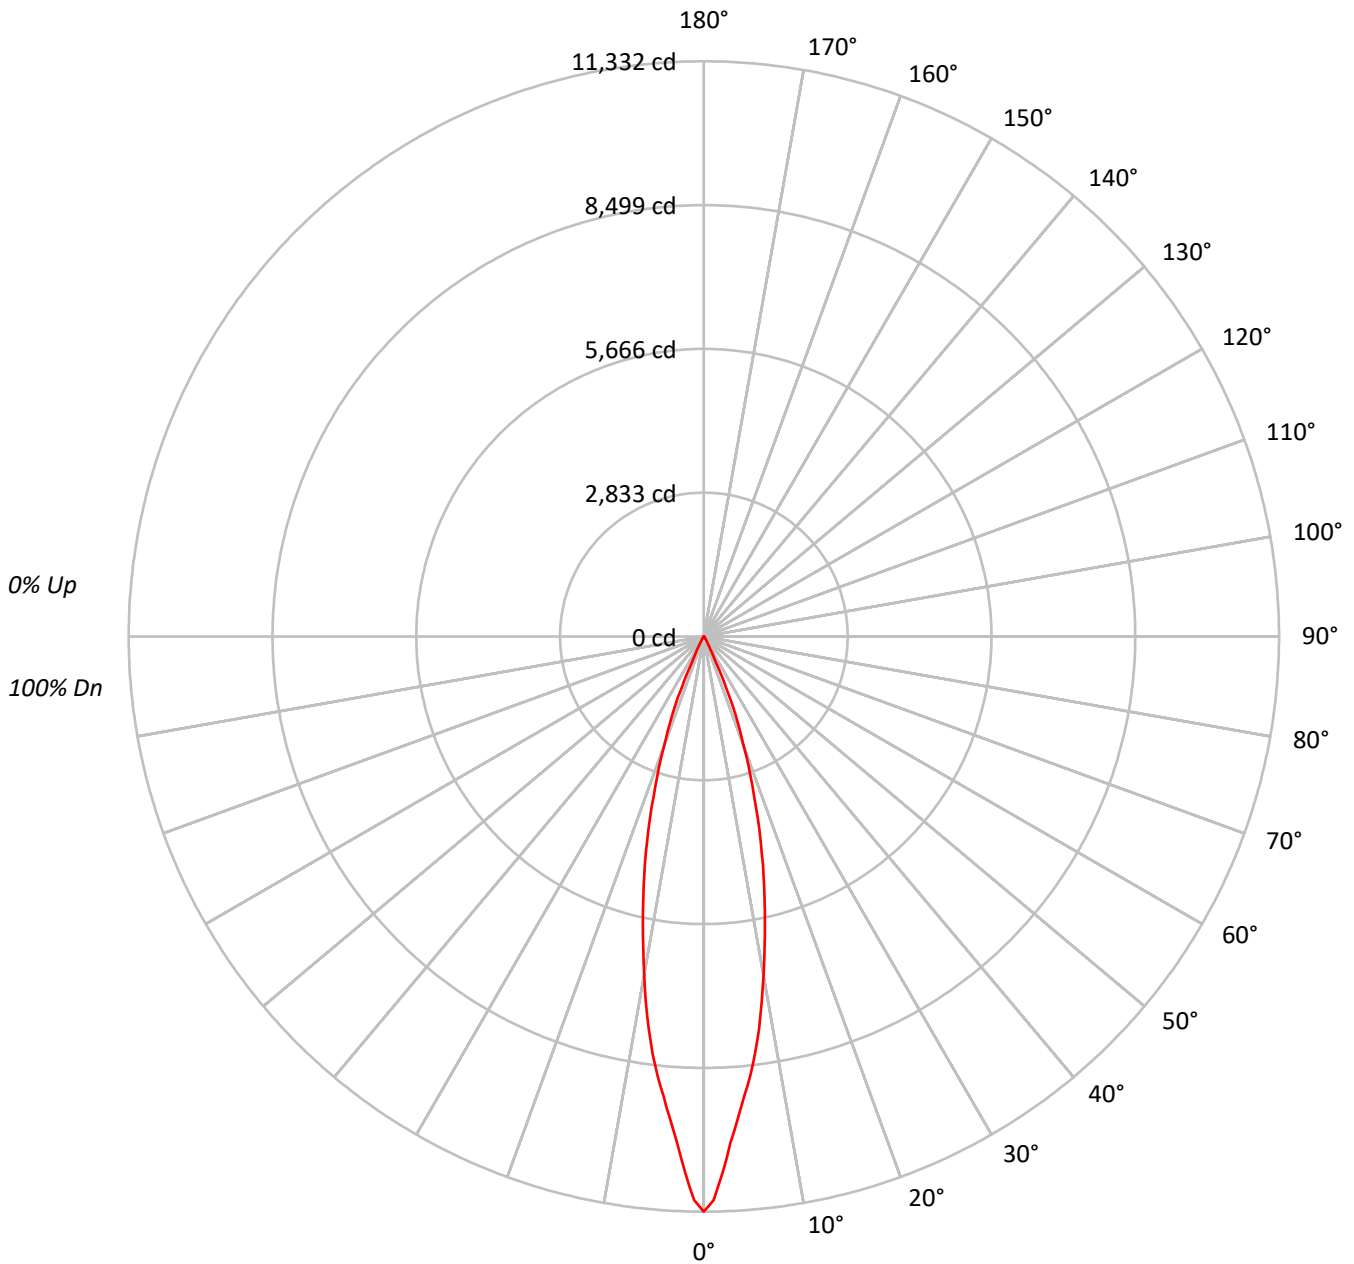



TEST NUMBER: P170546

CATALOG NUMBER: LDA4A28930D010TE LAR25NF 4LAL1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	98	98	97															
2	111	108	105	103	109	106	104	101	103	101	99	100	99	97	98	96	95	94	95	96	95	94															
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	94	92	91	95	94	92	91															
4	105	100	96	93	103	98	95	92	97	94	91	95	92	90	93	91	89	88	93	91	89	88															
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	91	88	86	85															
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	88	86	84	83															
7	96	90	86	83	95	89	85	83	88	85	82	87	84	82	86	84	82	81	86	84	82	81															
8	94	87	83	80	93	87	83	80	86	82	80	85	82	80	84	81	79	78	84	81	79	78															
9	91	85	81	78	90	84	80	78	83	80	78	83	80	77	82	79	77	76	82	79	77	76															
10	89	82	78	76	88	82	78	76	81	78	76	81	78	75	80	77	75	74	80	77	75	74															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1397703
5°	1127389
10°	847381
15°	563219
20°	302099
25°	76446
30°	18145
35°	5948
40°	2464
45°	1116
50°	480
55°	280
60°	321
65°	379
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P170546

CATALOG NUMBER: LDA4A28930D010TE LAR25NF 4LAL1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	800.3	33.3
10°-20°	1192.6	49.6
20°-30°	372.6	15.5
30°-40°	30.6	1.3
40°-50°	5.3	0.2
50°-60°	1.3	0.1
60°-70°	0.8	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2365.6	98.4
0°-40°	2396.1	99.7
0°-60°	2402.7	100.0
0°-90°	2403.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2403.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	11332	
5°	9105	800
15°	4411	1193
25°	562	373
35°	40	31
45°	6	5
55°	1	1
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P170546

CATALOG NUMBER: LDA4A28930D010TE LAR25NF 4LAL1

CANDELA DISTRIBUTION (FULL):

	0°
0°	11331.6
1°	11107.4
2°	10566.1
3°	9998.1
4°	9529.4
5°	9105.3
6°	8709.2
7°	8282.5
8°	7798.5
9°	7296.7
10°	6765.6
11°	6257.4
12°	5779.8
13°	5318.7
14°	4862.8
15°	4410.6
17.5°	3288.5
20°	2301.5
22.5°	1491.4
25°	561.7
27.5°	224.2
30°	127.4
32.5°	67.5
35°	39.5
37.5°	24.2
40°	15.3
42.5°	8.9
45°	6.4
47.5°	3.8
50°	2.5
52.5°	1.3
55°	1.3
57.5°	1.3
60°	1.3
62.5°	1.3
65°	1.3
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P170546

CATALOG NUMBER: LDA4A28930D010TE LAR25NF 4LAL1

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)