

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P170192

Luminaire Tested: **LDA4A28840D010TE LAR15SP 4LPIN**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P170192  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26150)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LDA4A28840D010TE LAR15SP 4LPIN  
Description: PORTFOLIO 4" White Pinhole with Black Oculus, Self-flanged, 15° Spot Optic, at 0° tilt  
Light Source: (1) HIGH LUMEN LED 80CRI / 4000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1185.2 lumens  
Efficiency: N/A  
Efficacy: 26.6 lumens/watt  
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.31  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct


Input Watts (W): 44.49  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P170192

CATALOG NUMBER: LDA4A28840D010TE LAR15SP 4LPIN

### Luminous Intensity Polar Plot

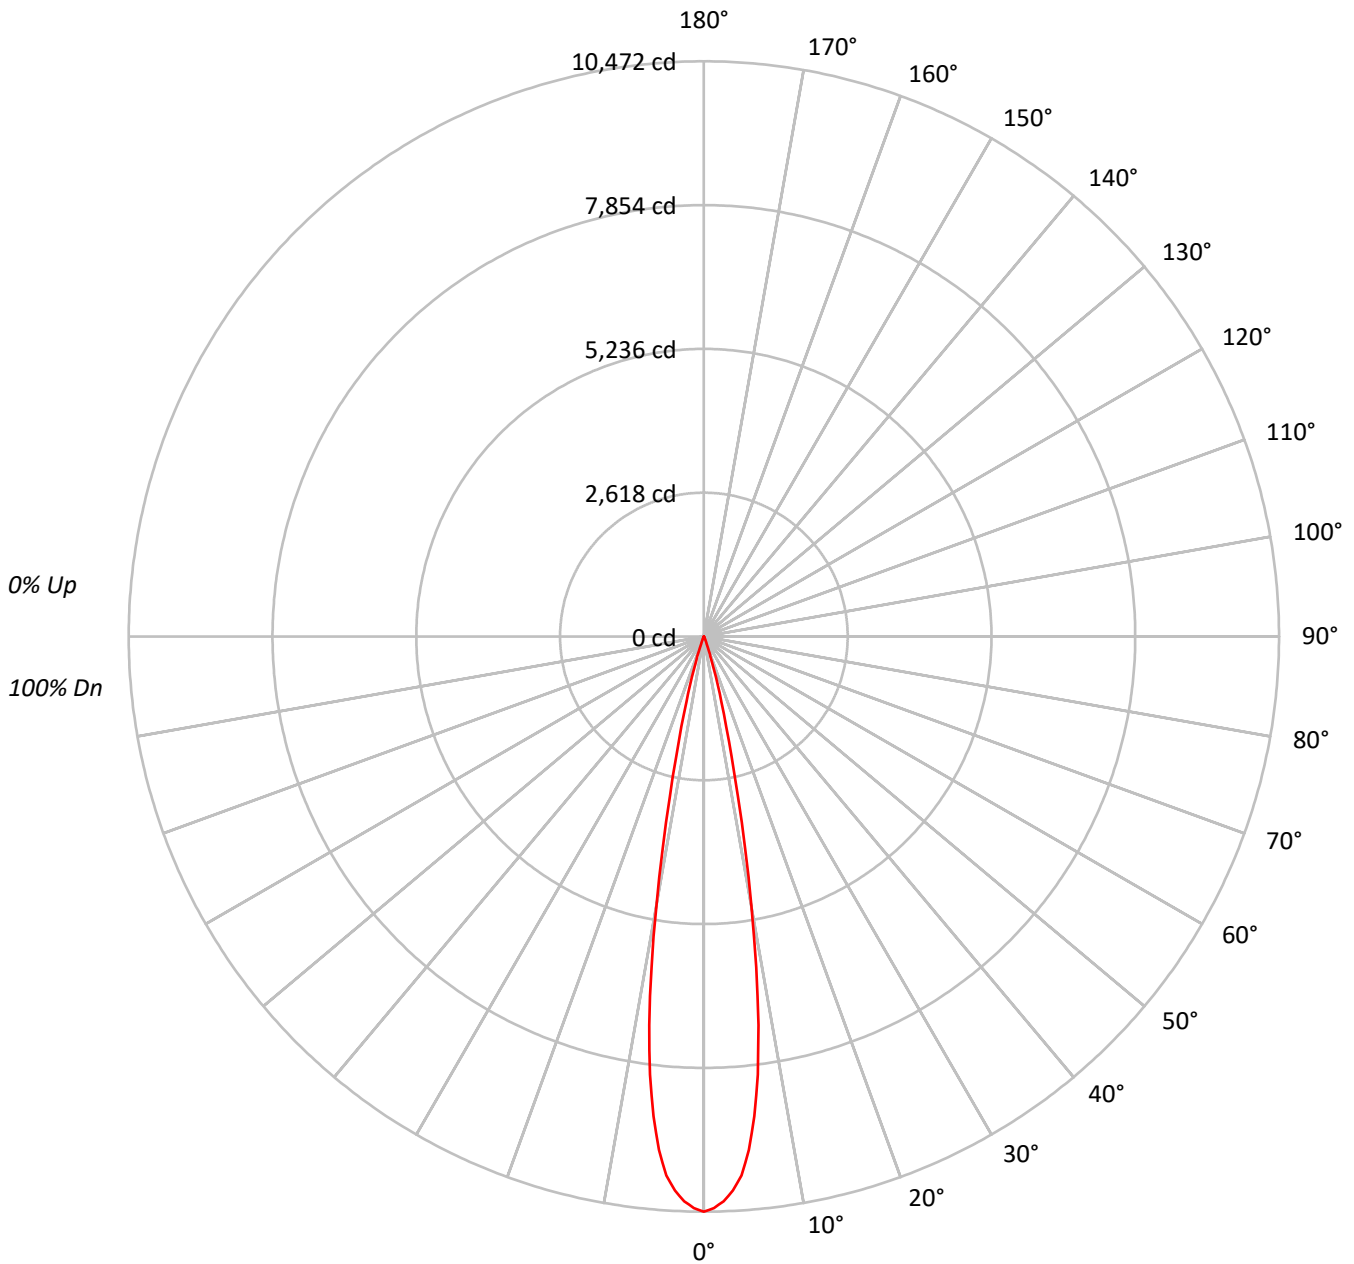



TEST NUMBER: P170192

CATALOG NUMBER: LDA4A28840D010TE LAR15SP 4LPIN

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	116	114	113	111	114	112	111	109	108	107	106	105	104	103	101	101	100	98	98	98	98
2	113	110	108	106	111	109	107	105	106	104	103	103	102	100	100	99	98	97	97	97	97
3	111	107	104	102	109	106	103	101	103	101	100	101	100	98	99	98	97	96	96	96	96
4	109	104	101	99	107	103	101	99	102	99	97	100	98	96	98	97	95	94	94	94	94
5	107	102	99	97	105	101	98	96	100	97	96	98	96	95	97	95	94	93	93	93	93
6	105	100	97	95	104	99	97	94	98	96	94	97	95	93	96	94	93	92	92	92	92
7	103	98	95	93	102	98	95	93	97	94	92	96	94	92	95	93	92	91	91	91	91
8	101	97	94	92	101	96	93	91	95	93	91	95	92	91	94	92	91	90	90	90	90
9	100	95	92	90	99	95	92	90	94	92	90	93	91	90	93	91	89	89	89	89	89
10	98	94	91	89	98	93	91	89	93	90	89	92	90	89	92	90	88	88	88	88	88

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1291737
5°	1161686
10°	624664
15°	157271
20°	21081
25°	4151
30°	1139
35°	241
40°	258
45°	0
50°	0
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P170192

CATALOG NUMBER: LDA4A28840D010TE LAR15SP 4LPIN

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	754.0	63.6
10°-20°	408.6	34.5
20°-30°	20.8	1.8
30°-40°	1.7	0.1
40°-50°	0.1	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1183.3	99.8
0°-40°	1185.0	100.0
0°-60°	1185.2	100.0
0°-90°	1185.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1185.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	10472	
5°	9382	754
15°	1232	409
25°	30	21
35°	2	2
45°	0	0
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P170192

CATALOG NUMBER: LDA4A28840D010TE LAR15SP 4LPIN

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	10472.5
1°	10408.3
2°	10289.5
3°	10098.4
4°	9835.1
5°	9382.3
6°	8781.7
7°	8039.9
8°	7145.5
9°	6093.7
10°	4987.4
11°	3921.2
12°	2985.0
13°	2243.2
14°	1687.6
15°	1231.6
17.5°	452.8
20°	160.6
22.5°	65.8
25°	30.5
27.5°	14.5
30°	8.0
32.5°	3.2
35°	1.6
37.5°	1.6
40°	1.6
42.5°	0.0
45°	0.0
47.5°	0.0
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P170192

CATALOG NUMBER: LDA4A28840D010TE LAR15SP 4LPIN

**CANDELA DISTRIBUTION (continued):**

0°  
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)