

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P170656

Luminaire Tested: **LDA4A09840D010TE LAR35FL 4LFC1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P170656  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26143)  
Test Lab: INNOVATION CENTER-P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LDA4A09840D010TE LAR35FL 4LFC1  
Description: PORTFOLIO 4" Flat Cone, Self-flange Trim Ring, 35° Flood Optic, at 0° tilt  
Light Source: (1) HIGH LUMEN LED 80CRI / 4000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1201.0 lumens  
Efficiency: N/A  
Efficacy: 86.8 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.56  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct

Input Watts (W): 13.84  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P170656  
CATALOG NUMBER: LDA4A09840D010TE LAR35FL 4LFC1

### Luminous Intensity Polar Plot

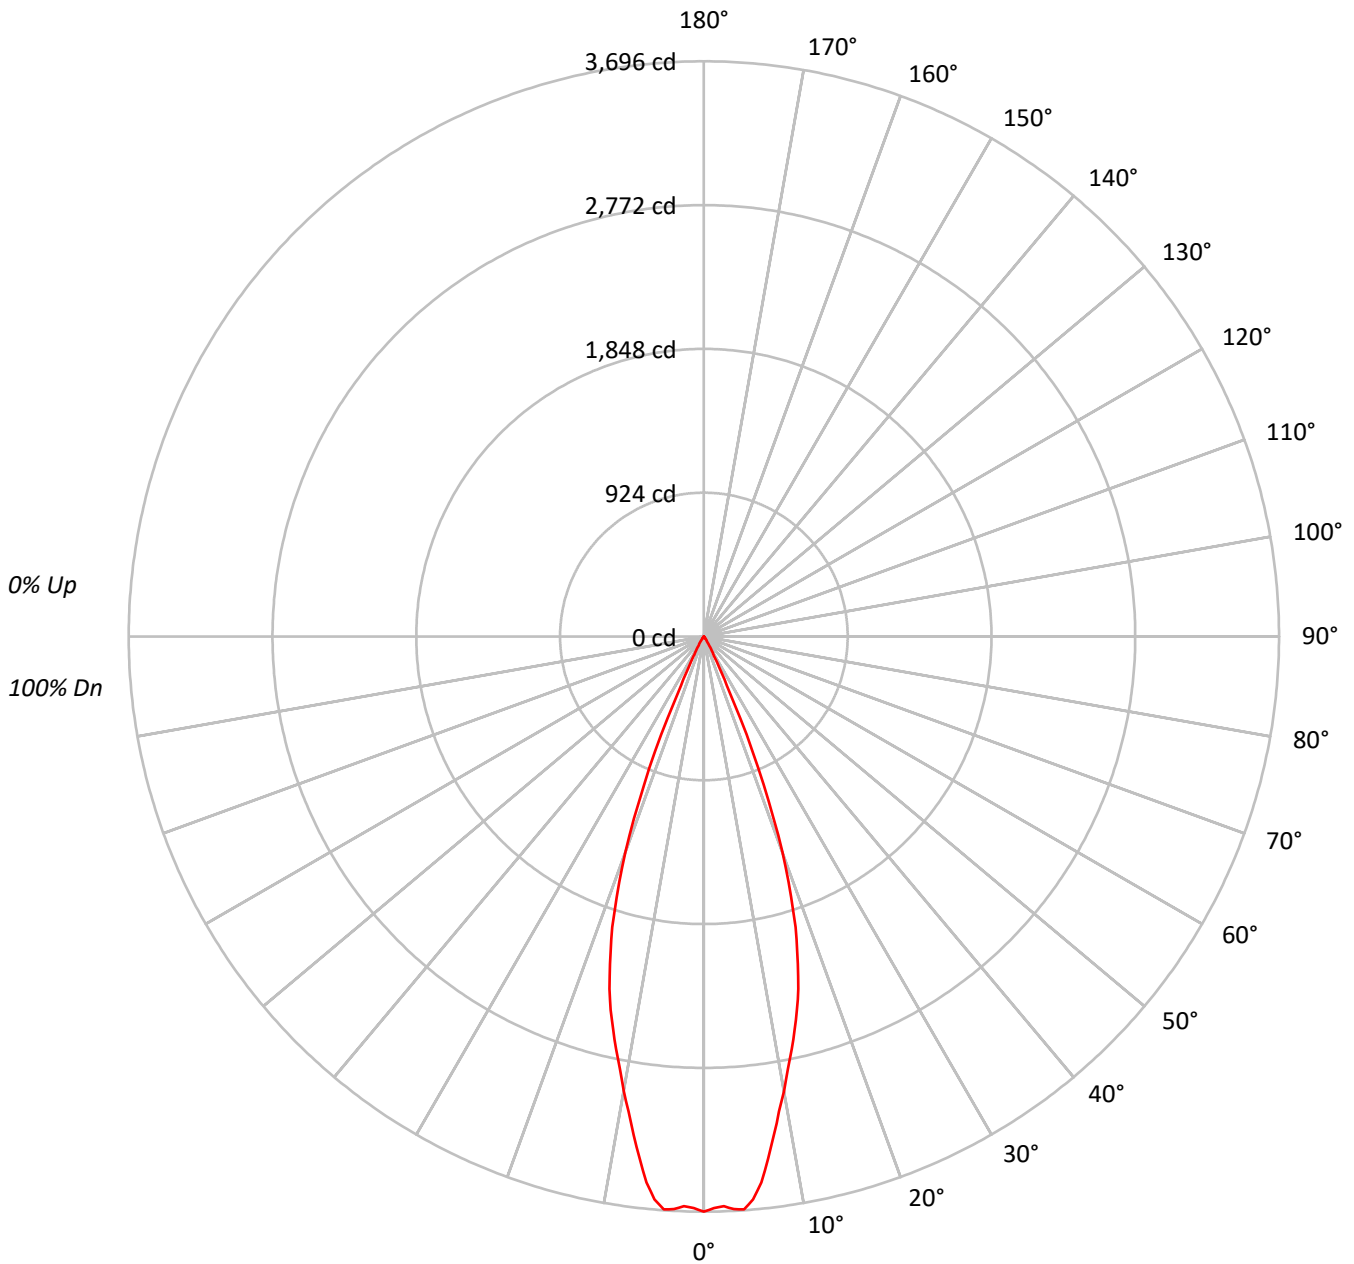



TEST NUMBER: P170656

CATALOG NUMBER: LDA4A09840D010TE LAR35FL 4LFC1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	111	109	113	111	109	107	107	105	104	103	102	101	100	99	98	96
2	111	107	104	102	109	106	103	101	103	100	99	100	98	96	97	96	94	93
3	107	103	99	96	106	101	98	95	99	96	94	97	94	92	95	93	91	90
4	104	99	94	91	102	97	94	91	95	92	90	94	91	89	92	90	88	87
5	101	95	91	87	99	94	90	87	92	89	86	91	88	86	89	87	85	84
6	98	91	87	84	96	91	87	84	89	86	83	88	85	83	87	84	82	81
7	95	88	84	81	94	87	83	81	86	83	80	85	82	80	84	82	79	78
8	92	85	81	78	91	85	81	78	84	80	77	83	80	77	82	79	77	76
9	89	82	78	75	88	82	78	75	81	78	75	80	77	75	80	77	75	74
10	87	80	76	73	86	79	76	73	79	75	73	78	75	72	78	75	72	71

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	455848
5°	449715
10°	371299
15°	299347
20°	193716
25°	47294
30°	11366
35°	2861
40°	902
45°	192
50°	115
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P170656

CATALOG NUMBER: LDA4A09840D010TE LAR35FL 4LFC1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	321.7	26.8
10°-20°	628.7	52.4
20°-30°	232.7	19.4
30°-40°	16.4	1.4
40°-50°	1.4	0.1
50°-60°	0.1	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1183.1	98.5
0°-40°	1199.5	99.9
0°-60°	1201.0	100.0
0°-90°	1201.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1201.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3696	
5°	3632	322
15°	2344	629
25°	348	233
35°	19	16
45°	1	1
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P170656

CATALOG NUMBER: LDA4A09840D010TE LAR35FL 4LFC1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3695.7
1°	3673.9
2°	3662.2
3°	3685.1
4°	3690.6
5°	3632.1
6°	3527.8
7°	3382.2
8°	3235.0
9°	3089.4
10°	2964.5
11°	2830.0
12°	2711.2
13°	2593.0
14°	2473.1
15°	2344.2
17.5°	1958.3
20°	1475.8
22.5°	913.0
25°	347.5
27.5°	142.8
30°	79.8
32.5°	37.9
35°	19.0
37.5°	10.0
40°	5.6
42.5°	2.8
45°	1.1
47.5°	0.6
50°	0.6
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P170656

CATALOG NUMBER: LDA4A09840D010TE LAR35FL 4LFC1

**CANDELA DISTRIBUTION (continued):**

0°  
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)