

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P776991

Luminaire Tested: LERS4D02D010-EC4DR150210IC9030-4LBS1MW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P776991  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LERS4D02D010-EC4DR150210IC9030-4LBS1MW  
Description: 4 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 15° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 351.9 lumens  
Efficiency: N/A  
Efficacy: 69.0 lumens/watt  
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23  
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')  
CIE Type: Direct

Input Watts (W): 5.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P776991

CATALOG NUMBER: LERS4D02D010-EC4DR150210IC9030-4LBS1MW

### Luminous Intensity Polar Plot

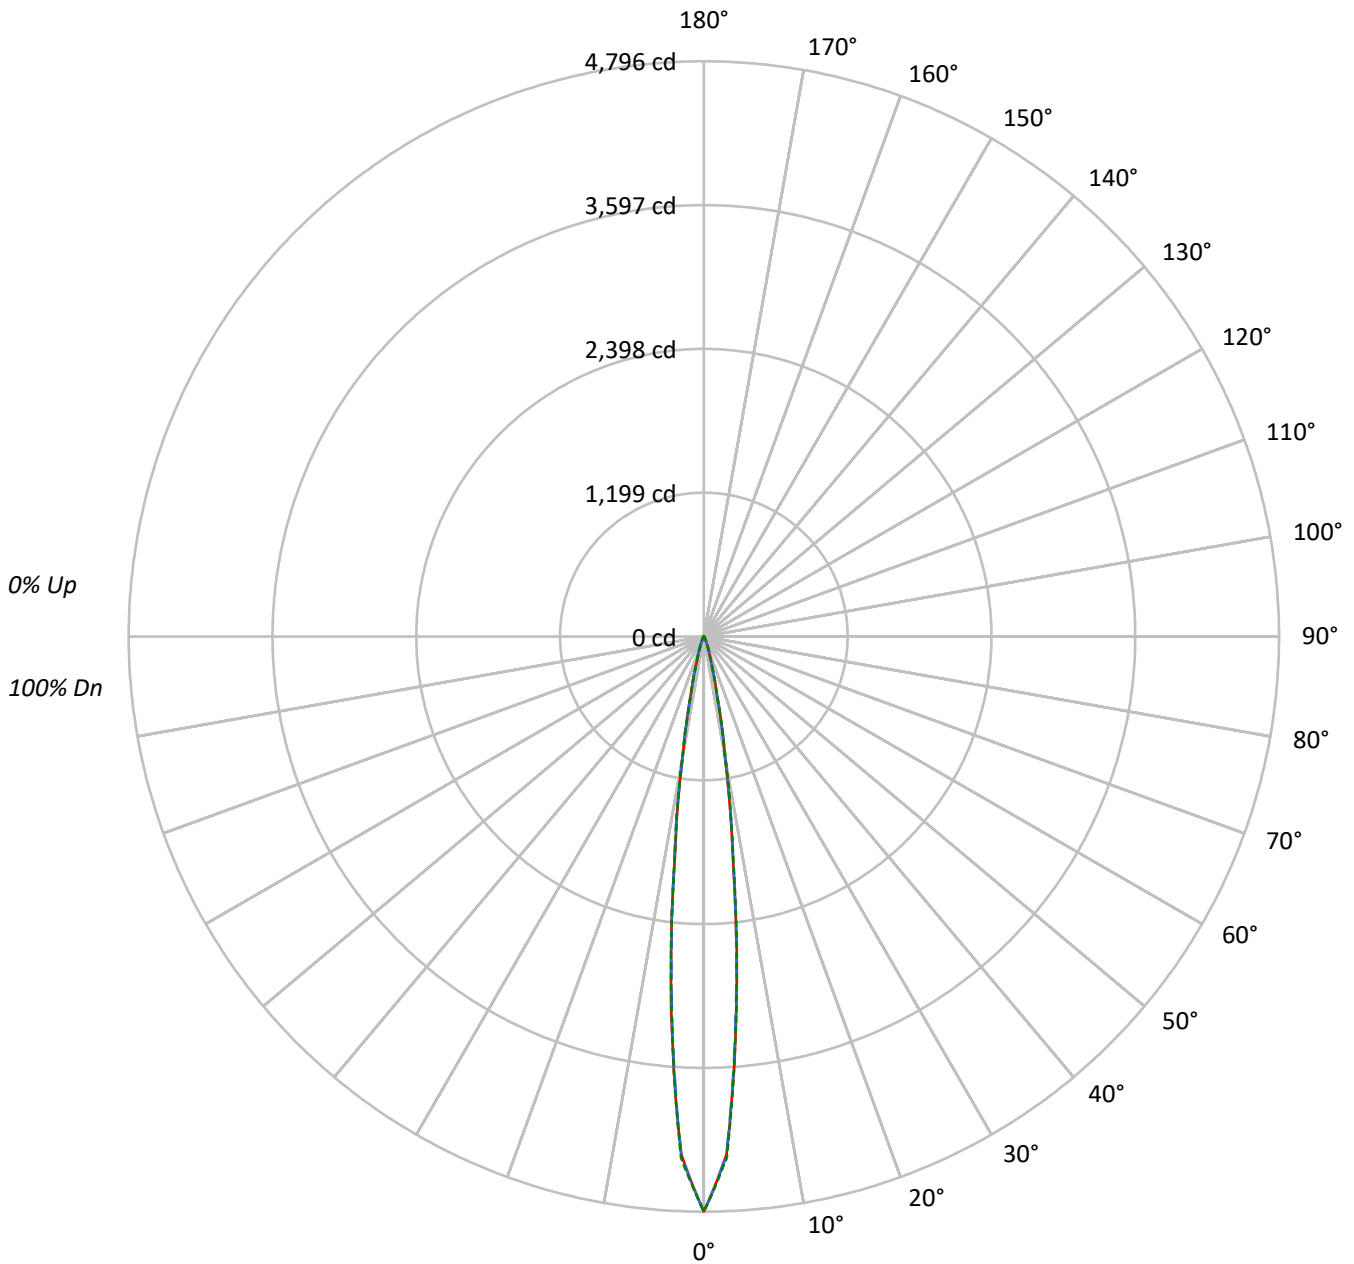



TEST NUMBER: P776991

CATALOG NUMBER: LERS4D02D010-EC4DR150210IC9030-4LBS1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98						98													
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	99	98	96						96													
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94						94													
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93						93													
5	106	101	98	95	104	100	97	95	99	96	94	97	95	93	96	94	92	92						92													
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90						90													
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89						89													
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88						88													
9	99	94	90	88	98	93	90	88	92	90	88	92	89	88	91	89	88	87						87													
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86						86													

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	539601	539601	539601
5°	317092	312987	315466
10°	94642	95304	96760
15°	23538	23999	23260
20°	7045	8158	7192
25°	2485	3163	2516
30°	914	1198	929
35°	458	516	443
40°	291	320	291
45°	210	224	210
50°	167	167	167
55°	139	139	139
60°	112	112	112
65°	86	86	86
70°	73	73	73
75°	45	45	60
80°	32	32	32
85°	17	17	17

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 224 cd/sqm



TEST NUMBER: P776991

CATALOG NUMBER: LERS4D02D010-EC4DR150210IC9030-4LBS1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	228.3	64.9
10°-20°	93.9	26.7
20°-30°	18.6	5.3
30°-40°	4.7	1.3
40°-50°	2.4	0.7
50°-60°	1.8	0.5
60°-70°	1.3	0.4
70°-80°	0.7	0.2
80°-90°	0.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	340.8	96.9
0°-40°	345.5	98.2
0°-60°	349.7	99.4
0°-90°	351.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	351.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	4796	4796	4796	4796	4796	
5°	3120	3088	3080	3101	3104	228
15°	271	276	276	271	268	93
25°	32	36	41	36	32	17
35°	6	7	7	7	6	4
45°	3	3	3	3	3	2
55°	2	2	2	2	2	2
65°	1	1	1	1	1	1
75°	1	1	1	1	1	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P776991

CATALOG NUMBER: LERS4D02D010-EC4DR150210IC9030-4LBS1MW

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	4795.6	4795.6	4795.6	4795.6	4795.6
2.5°	4325.9	4329.5	4330.9	4335.2	4351.0
5°	3120.1	3088.1	3079.7	3101.1	3104.1
7.5°	1848.3	1854.7	1878.5	1883.8	1864.7
10°	1014.3	1022.6	1021.4	1028.7	1037.0
12.5°	518.7	512.2	510.2	518.5	506.9
15°	271.0	276.1	276.3	271.4	267.8
17.5°	145.8	151.7	161.4	153.5	141.3
20°	86.1	91.4	99.7	93.2	87.9
22.5°	53.2	57.5	63.3	58.3	54.0
25°	31.9	36.1	40.6	35.9	32.3
27.5°	18.9	22.5	25.4	22.3	18.7
30°	12.2	14.2	16.0	14.0	12.4
32.5°	8.5	9.3	10.2	9.3	8.5
35°	6.3	6.7	7.1	6.7	6.1
37.5°	4.9	5.3	5.5	5.1	4.7
40°	4.1	4.3	4.5	4.3	4.1
42.5°	3.5	3.7	3.7	3.7	3.5
45°	3.0	3.0	3.2	3.0	3.0
47.5°	2.6	2.6	2.8	2.6	2.6
50°	2.4	2.4	2.4	2.4	2.4
52.5°	2.2	2.2	2.2	2.2	2.2
55°	2.0	2.0	2.0	2.0	2.0
57.5°	1.8	1.8	1.8	1.8	1.8
60°	1.6	1.6	1.6	1.6	1.6
62.5°	1.4	1.4	1.4	1.4	1.4
65°	1.2	1.2	1.2	1.2	1.2
67.5°	1.2	1.2	1.2	1.2	1.2
70°	1.0	1.0	1.0	1.0	1.0
72.5°	0.8	0.8	0.8	0.8	0.8
75°	0.6	0.6	0.6	0.6	0.8
77.5°	0.6	0.6	0.6	0.6	0.6
80°	0.4	0.4	0.4	0.4	0.4
82.5°	0.4	0.4	0.4	0.4	0.4
85°	0.2	0.2	0.2	0.2	0.2
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)