

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P777012

Luminaire Tested: LERS4D02D010-EC4DR200210IC9030-4LBS1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P777012
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LERS4D02D010-EC4DR200210IC9030-4LBS1B
Description: 4 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 363.8 lumens
Efficiency: N/A
Efficacy: 71.3 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 5.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P777012

CATALOG NUMBER: LERS4D02D010-EC4DR200210IC9030-4LBS1B

Luminous Intensity Polar Plot

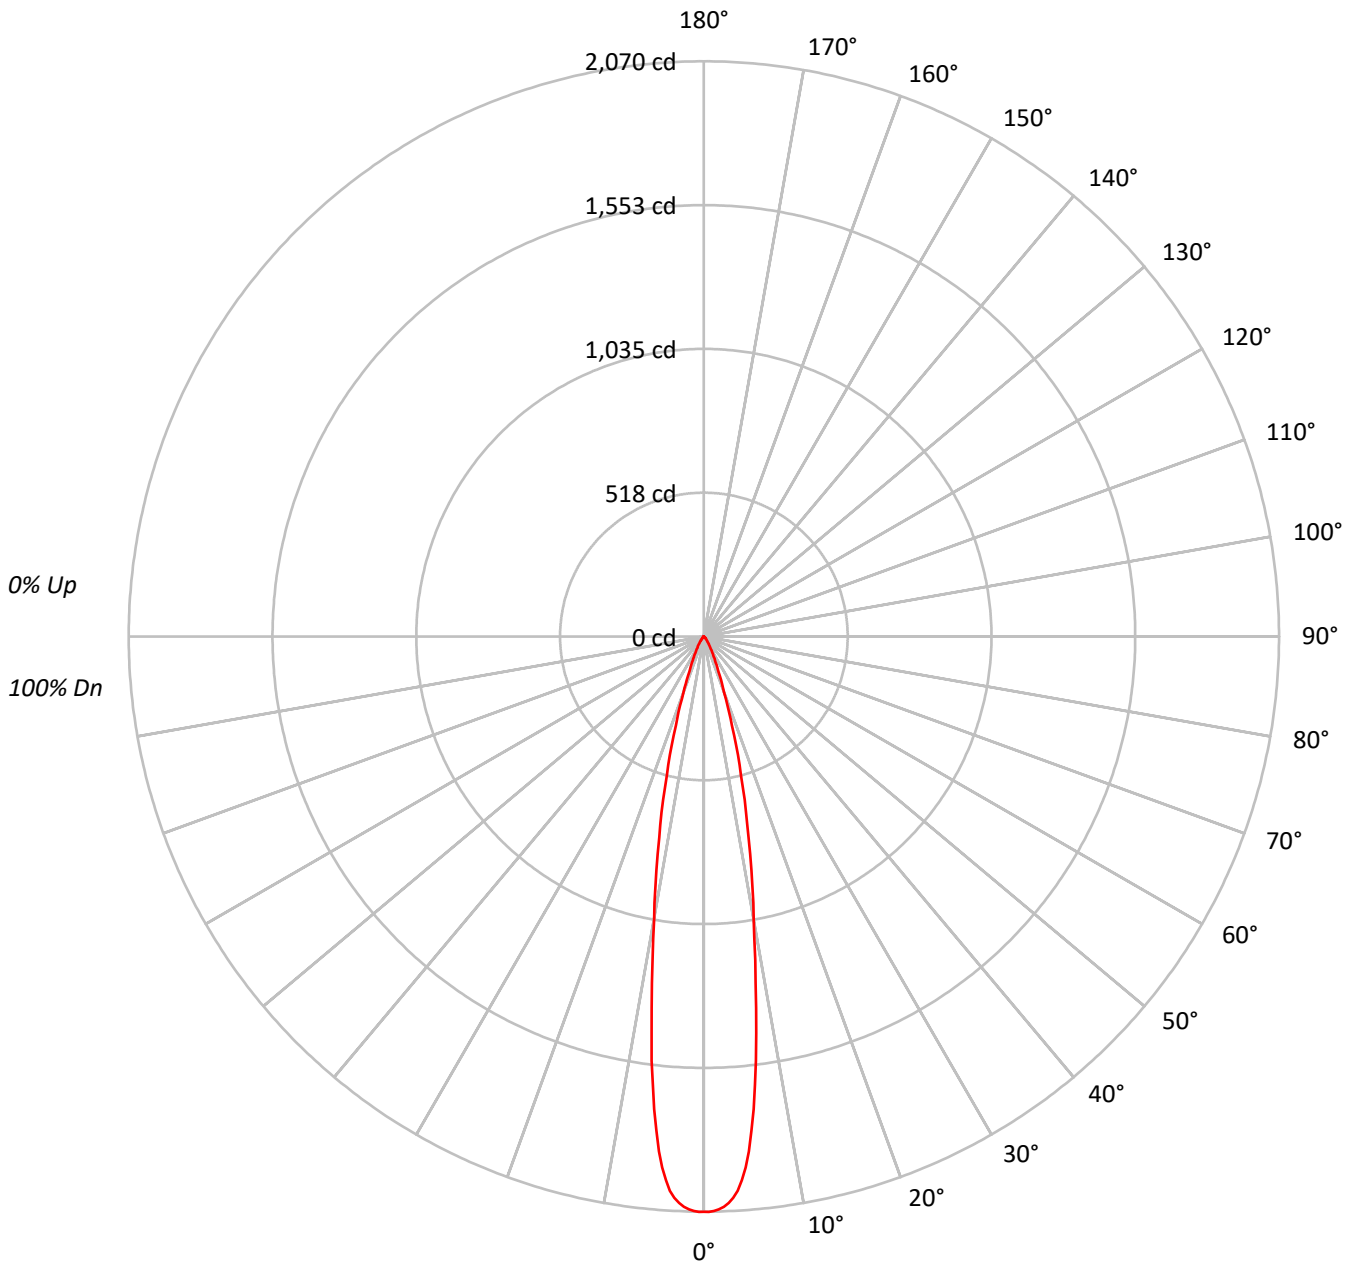



TEST NUMBER: P777012

CATALOG NUMBER: LERS4D02D010-EC4DR200210IC9030-4LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	97	97																
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	94	94																
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	91	91																
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	88	88																
5	102	96	92	89	100	95	91	89	93	90	88	92	89	87	91	88	86	85	85	85	85																
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	83	83																
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	81	81																
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	79	79	79																
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	77	77	77																
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	75	75	75																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	226224
5°	204100
10°	114552
15°	58232
20°	24650
25°	11380
30°	6031
35°	3241
40°	1740
45°	1020
50°	595
55°	324
60°	197
65°	155
70°	64
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1020 cd/sqm



TEST NUMBER: P777012

CATALOG NUMBER: LERS4D02D010-EC4DR200210IC9030-4LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	147.4	40.5
10°-20°	145.2	39.9
20°-30°	47.4	13.0
30°-40°	16.2	4.4
40°-50°	5.4	1.5
50°-60°	1.6	0.5
60°-70°	0.6	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	340.0	93.5
0°-40°	356.2	97.9
0°-60°	363.2	99.8
0°-90°	363.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	363.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2070	
5°	1861	147
15°	515	145
25°	94	47
35°	24	16
45°	7	5
55°	2	2
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P777012

CATALOG NUMBER: LERS4D02D010-EC4DR200210IC9030-4LBS1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	2070.5
0.5°	2070.5
1°	2068.0
1.5°	2062.8
2°	2053.4
2.5°	2040.9
3°	2023.2
3.5°	1998.4
4°	1961.8
4.5°	1917.1
5°	1860.9
5.5°	1787.0
6°	1711.2
6.5°	1624.3
7°	1539.4
7.5°	1439.8
8°	1350.9
8.5°	1261.5
9°	1178.9
9.5°	1103.1
10°	1032.5
12.5°	741.4
15°	514.8
17.5°	336.3
20°	212.0
22.5°	137.4
25°	94.4
27.5°	66.4
30°	47.8
32.5°	34.3
35°	24.3
37.5°	17.0
40°	12.2
42.5°	8.9
45°	6.6
47.5°	5.2
50°	3.5
52.5°	2.2
55°	1.7
57.5°	1.3
60°	0.9
62.5°	0.7
65°	0.6



TEST NUMBER: P777012

CATALOG NUMBER: LERS4D02D010-EC4DR200210IC9030-4LBS1B

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





67.5°		0.4
70°		0.2

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)