

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P777020

Luminaire Tested: LERS4D02D010-EC4DR200210IC9040-4LBS1B

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P777020  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LERS4D02D010-EC4DR200210IC9040-4LBS1B  
Description: 4 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 20° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 394.6 lumens  
Efficiency: N/A  
Efficacy: 77.4 lumens/watt  
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 5.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P777020

CATALOG NUMBER: LERS4D02D010-EC4DR200210IC9040-4LBS1B

### Luminous Intensity Polar Plot

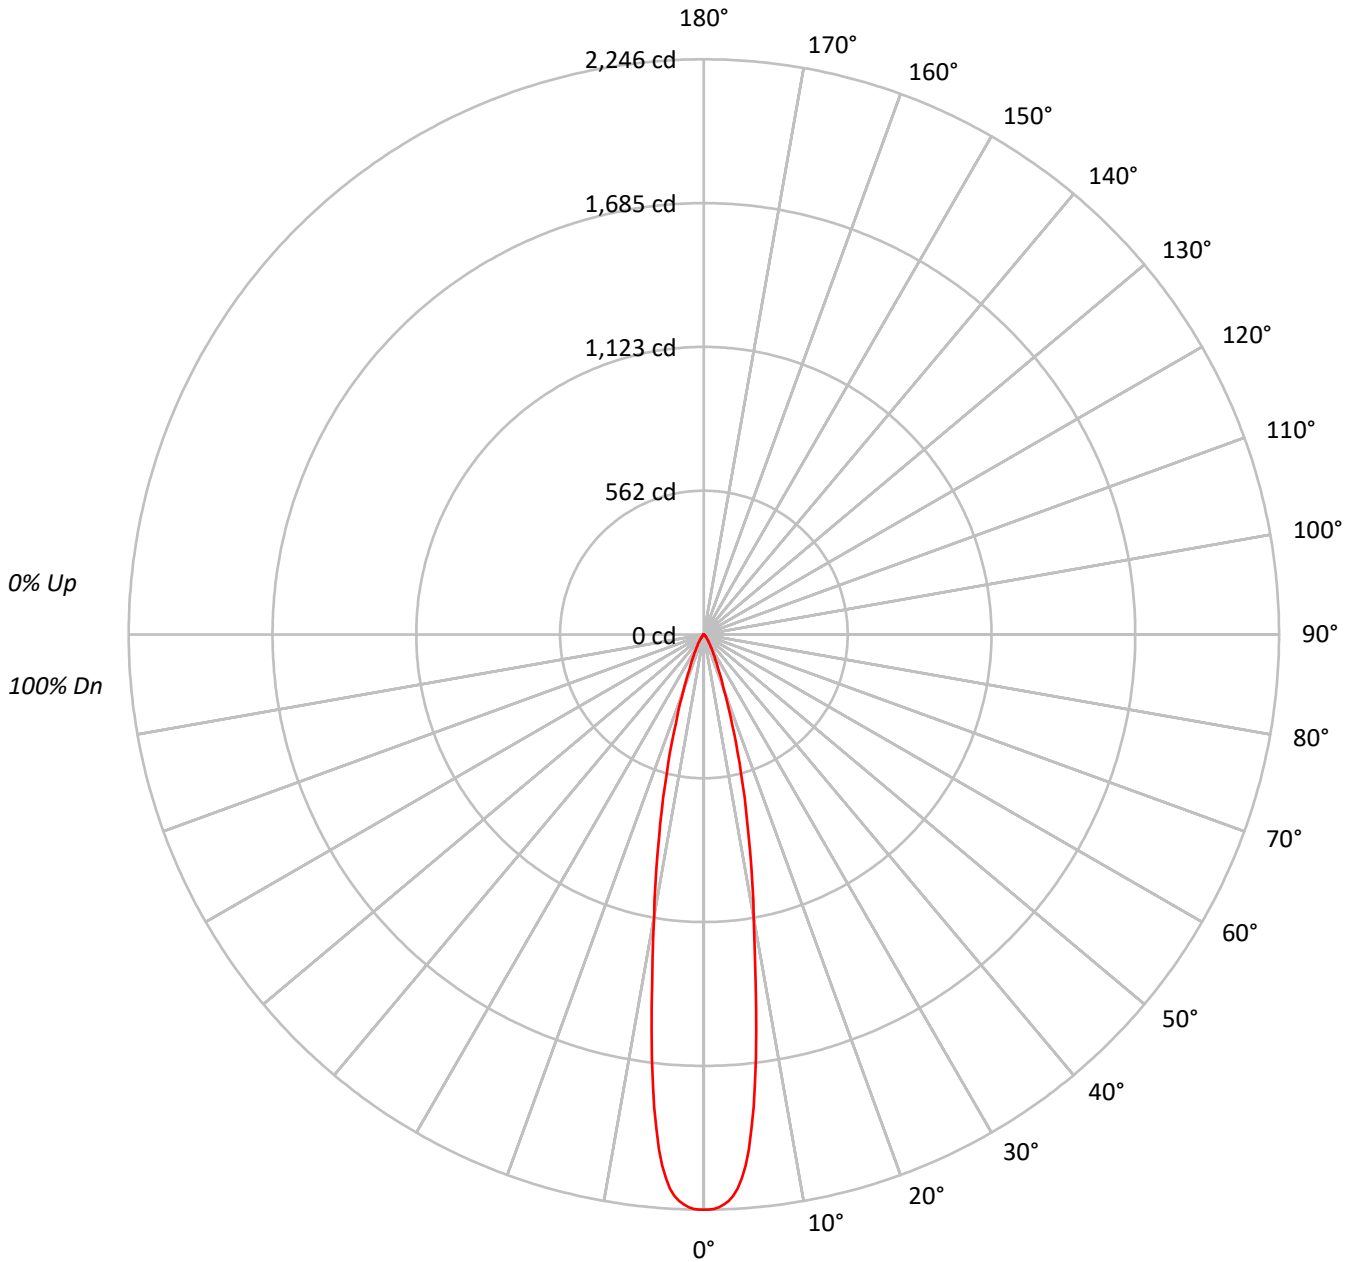



TEST NUMBER: P777020

CATALOG NUMBER: LERS4D02D010-EC4DR200210IC9040-4LBS1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	97	97																
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	94	94																
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	91	91																
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	88	88																
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	85	85	85																
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	83	83																
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	81	81																
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	79	79	79																
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	77	77	77																
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	75	75	75																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	245432
5°	221418
10°	124271
15°	63175
20°	26743
25°	12345
30°	6535
35°	3521
40°	1883
45°	1113
50°	646
55°	343
60°	219
65°	155
70°	64
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1113 cd/sqm



TEST NUMBER: P777020

CATALOG NUMBER: LERS4D02D010-EC4DR200210IC9040-4LBS1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	159.9	40.5
10°-20°	157.5	39.9
20°-30°	51.4	13.0
30°-40°	17.5	4.4
40°-50°	5.9	1.5
50°-60°	1.8	0.4
60°-70°	0.6	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	368.8	93.5
0°-40°	386.4	97.9
0°-60°	394.0	99.8
0°-90°	394.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	394.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2246	
5°	2019	160
15°	558	157
25°	102	51
35°	26	18
45°	7	6
55°	2	2
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P777020

CATALOG NUMBER: LERS4D02D010-EC4DR200210IC9040-4LBS1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2246.3
0.5°	2246.3
1°	2243.5
1.5°	2237.9
2°	2227.7
2.5°	2214.0
3°	2194.8
3.5°	2168.0
4°	2128.2
4.5°	2079.8
5°	2018.8
5.5°	1938.6
6°	1856.4
6.5°	1762.2
7°	1670.0
7.5°	1562.0
8°	1465.6
8.5°	1368.6
9°	1278.9
9.5°	1196.7
10°	1120.1
12.5°	804.3
15°	558.5
17.5°	364.8
20°	230.0
22.5°	149.0
25°	102.4
27.5°	72.0
30°	51.8
32.5°	37.2
35°	26.4
37.5°	18.4
40°	13.2
42.5°	9.6
45°	7.2
47.5°	5.6
50°	3.8
52.5°	2.4
55°	1.8
57.5°	1.4
60°	1.0
62.5°	0.8
65°	0.6



TEST NUMBER: P777020

CATALOG NUMBER: LERS4D02D010-EC4DR200210IC9040-4LBS1B

**CANDELA DISTRIBUTION (continued):**

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





67.5°		0.4
70°		0.2

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)