

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P777305

Luminaire Tested: LERS4D05D010-EC4DR150210IC9035-4LBS1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P777305
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LERS4D05D010-EC4DR150210IC9035-4LBS1H
Description: 4 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 15° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 713.1 lumens
Efficiency: N/A
Efficacy: 95.1 lumens/watt
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P777305

CATALOG NUMBER: LERS4D05D010-EC4DR150210IC9035-4LBS1H

Luminous Intensity Polar Plot

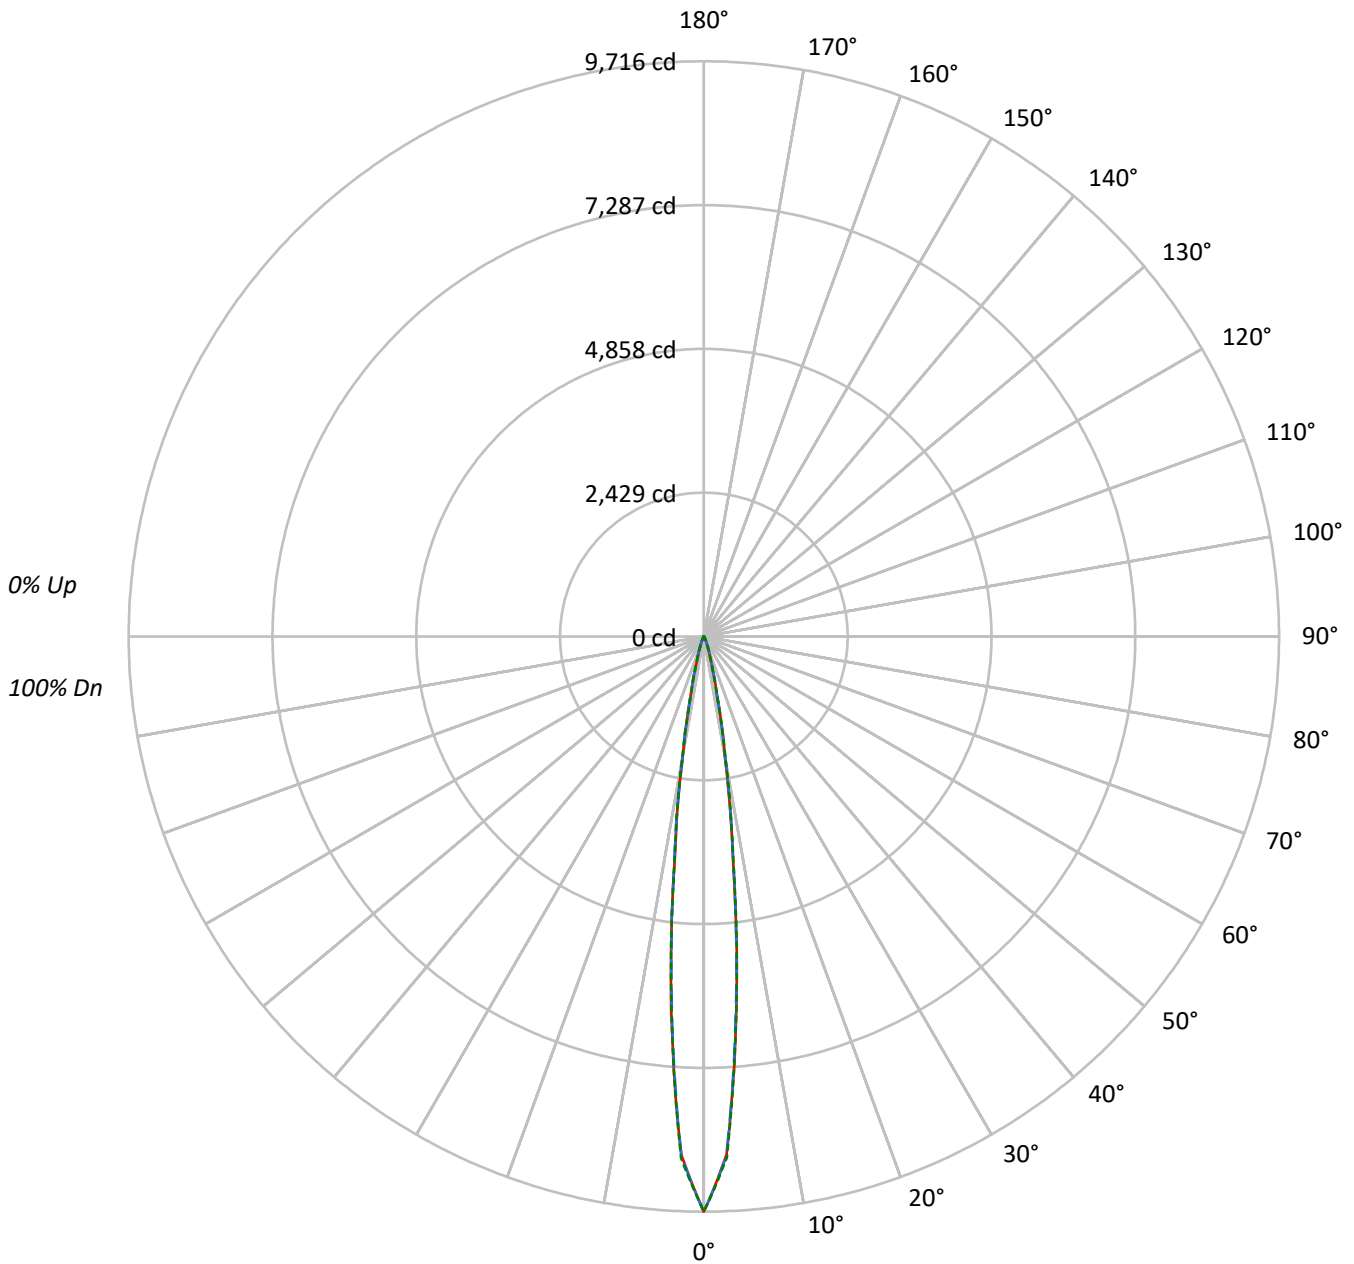



TEST NUMBER: P777305

CATALOG NUMBER: LERS4D05D010-EC4DR150210IC9035-4LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98						98													
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	98	98	96						96													
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94						94													
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93						93													
5	106	101	98	95	104	100	97	95	98	96	94	97	95	93	96	94	92	92						92													
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90						90													
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89						89													
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88						88													
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	88	87						87													
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86						86													

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1093244	1093244	1093244
5°	642437	634124	639134
10°	191738	193081	196039
15°	47693	48622	47120
20°	14270	16528	14573
25°	5032	6411	5095
30°	1850	2434	1880
35°	930	1046	893
40°	582	639	582
45°	434	462	434
50°	341	341	341
55°	285	285	285
60°	232	232	232
65°	178	178	178
70°	154	154	154
75°	91	91	121
80°	63	63	63
85°	33	33	33

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 462 cd/sqm



TEST NUMBER: P777305

CATALOG NUMBER: LERS4D05D010-EC4DR150210IC9035-4LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	462.5	64.9
10°-20°	190.2	26.7
20°-30°	37.8	5.3
30°-40°	9.4	1.3
40°-50°	5.0	0.7
50°-60°	3.7	0.5
60°-70°	2.6	0.4
70°-80°	1.5	0.2
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	690.5	96.8
0°-40°	700.0	98.2
0°-60°	708.6	99.4
0°-90°	713.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	713.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	9716	9716	9716	9716	9716	
5°	6321	6256	6240	6283	6289	462
15°	549	559	560	550	542	188
25°	65	73	82	73	65	34
35°	13	14	14	14	12	9
45°	6	6	7	6	6	5
55°	4	4	4	4	4	4
65°	2	2	2	2	2	3
75°	1	1	1	1	2	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P777305

CATALOG NUMBER: LERS4D05D010-EC4DR150210IC9035-4LBS1H

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	9716.0	9716.0	9716.0	9716.0	9716.0
2.5°	8764.2	8771.6	8774.5	8783.1	8815.2
5°	6321.4	6256.4	6239.6	6282.8	6288.9
7.5°	3744.6	3757.7	3805.9	3816.5	3777.9
10°	2054.9	2071.8	2069.3	2084.1	2101.0
12.5°	1050.9	1037.7	1033.6	1050.5	1027.0
15°	549.1	559.4	559.8	549.9	542.5
17.5°	295.3	307.2	327.0	311.0	286.3
20°	174.4	185.1	202.0	188.8	178.1
22.5°	107.8	116.4	128.3	118.0	109.4
25°	64.6	73.2	82.3	72.8	65.4
27.5°	38.3	45.7	51.4	45.2	37.8
30°	24.7	28.8	32.5	28.4	25.1
32.5°	17.3	18.9	20.6	18.9	17.3
35°	12.8	13.6	14.4	13.6	12.3
37.5°	9.9	10.7	11.1	10.3	9.5
40°	8.2	8.6	9.0	8.6	8.2
42.5°	7.0	7.4	7.4	7.4	7.0
45°	6.2	6.2	6.6	6.2	6.2
47.5°	5.3	5.3	5.8	5.3	5.3
50°	4.9	4.9	4.9	4.9	4.9
52.5°	4.5	4.5	4.5	4.5	4.5
55°	4.1	4.1	4.1	4.1	4.1
57.5°	3.7	3.7	3.7	3.7	3.7
60°	3.3	3.3	3.3	3.3	3.3
62.5°	2.9	2.9	2.9	2.9	2.9
65°	2.5	2.5	2.5	2.5	2.5
67.5°	2.5	2.5	2.5	2.5	2.5
70°	2.1	2.1	2.1	2.1	2.1
72.5°	1.6	1.6	1.6	1.6	1.6
75°	1.2	1.2	1.2	1.2	1.6
77.5°	1.2	1.2	1.2	1.2	1.2
80°	0.8	0.8	0.8	0.8	0.8
82.5°	0.8	0.8	0.8	0.8	0.8
85°	0.4	0.4	0.4	0.4	0.4
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)