

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P777332

Luminaire Tested: LERS4D05D010-EC4DR200210IC9040-4LBS1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P777332
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LERS4D05D010-EC4DR200210IC9040-4LBS1B
Description: 4 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 719.6 lumens
Efficiency: N/A
Efficacy: 95.9 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P777332

CATALOG NUMBER: LERS4D05D010-EC4DR200210IC9040-4LBS1B

Luminous Intensity Polar Plot

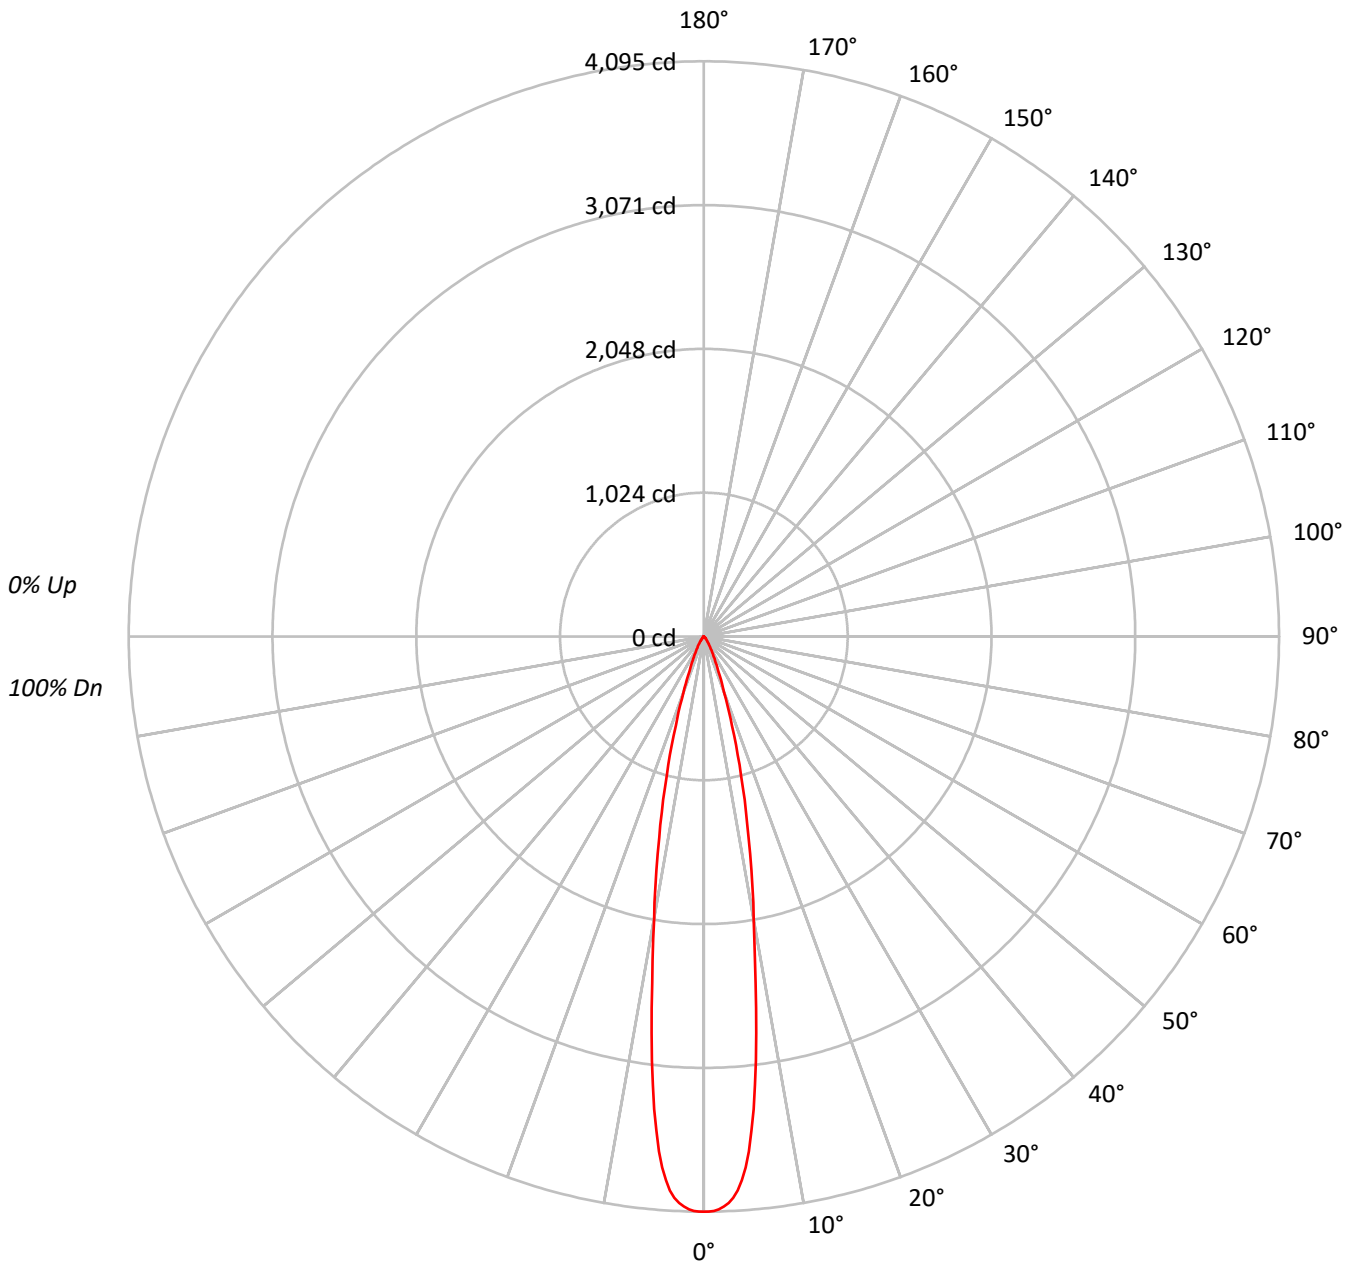



TEST NUMBER: P777332

CATALOG NUMBER: LERS4D05D010-EC4DR200210IC9040-4LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	98	99	97															
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	98	96	95															
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	98	96	95															
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	96	94	93															
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	85	94	92	91															
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	92	90	89															
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	90	88	87															
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	79	88	86	85															
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	77	86	84	83															
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	75	84	82	81															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	447456
5°	403692
10°	226574
15°	115174
20°	48765
25°	22508
30°	11922
35°	6416
40°	3437
45°	2024
50°	1173
55°	629
60°	393
65°	284
70°	128
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2024 cd/sqm



TEST NUMBER: P777332

CATALOG NUMBER: LERS4D05D010-EC4DR200210IC9040-4LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	291.6	40.5
10°-20°	287.1	39.9
20°-30°	93.8	13.0
30°-40°	31.9	4.4
40°-50°	10.7	1.5
50°-60°	3.2	0.5
60°-70°	1.1	0.2
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	672.5	93.5
0°-40°	704.4	97.9
0°-60°	718.4	99.8
0°-90°	719.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	719.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4095	
5°	3681	292
15°	1018	287
25°	187	94
35°	48	32
45°	13	11
55°	3	3
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P777332

CATALOG NUMBER: LERS4D05D010-EC4DR200210IC9040-4LBS1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	4095.3
0.5°	4095.3
1°	4090.2
1.5°	4080.0
2°	4061.4
2.5°	4036.6
3°	4001.6
3.5°	3952.8
4°	3880.2
4.5°	3791.9
5°	3680.7
5.5°	3534.5
6°	3384.6
6.5°	3212.8
7°	3044.7
7.5°	2847.8
8°	2672.0
8.5°	2495.1
9°	2331.8
9.5°	2181.9
10°	2042.2
12.5°	1466.4
15°	1018.2
17.5°	665.2
20°	419.4
22.5°	271.7
25°	186.7
27.5°	131.3
30°	94.5
32.5°	67.8
35°	48.1
37.5°	33.6
40°	24.1
42.5°	17.5
45°	13.1
47.5°	10.2
50°	6.9
52.5°	4.4
55°	3.3
57.5°	2.6
60°	1.8
62.5°	1.5
65°	1.1



TEST NUMBER: P777332

CATALOG NUMBER: LERS4D05D010-EC4DR200210IC9040-4LBS1B

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



67.5°		0.7
70°		0.4

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)