

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P777387

Luminaire Tested: LERS4D05D010-EC4DR300210IC9050-4LBS1MW

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P777387  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LERS4D05D010-EC4DR300210IC9050-4LBS1MW  
Description: 4 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 30° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 665.6 lumens  
Efficiency: N/A  
Efficacy: 88.7 lumens/watt  
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49  
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P777387

CATALOG NUMBER: LERS4D05D010-EC4DR300210IC9050-4LBS1MW

### Luminous Intensity Polar Plot

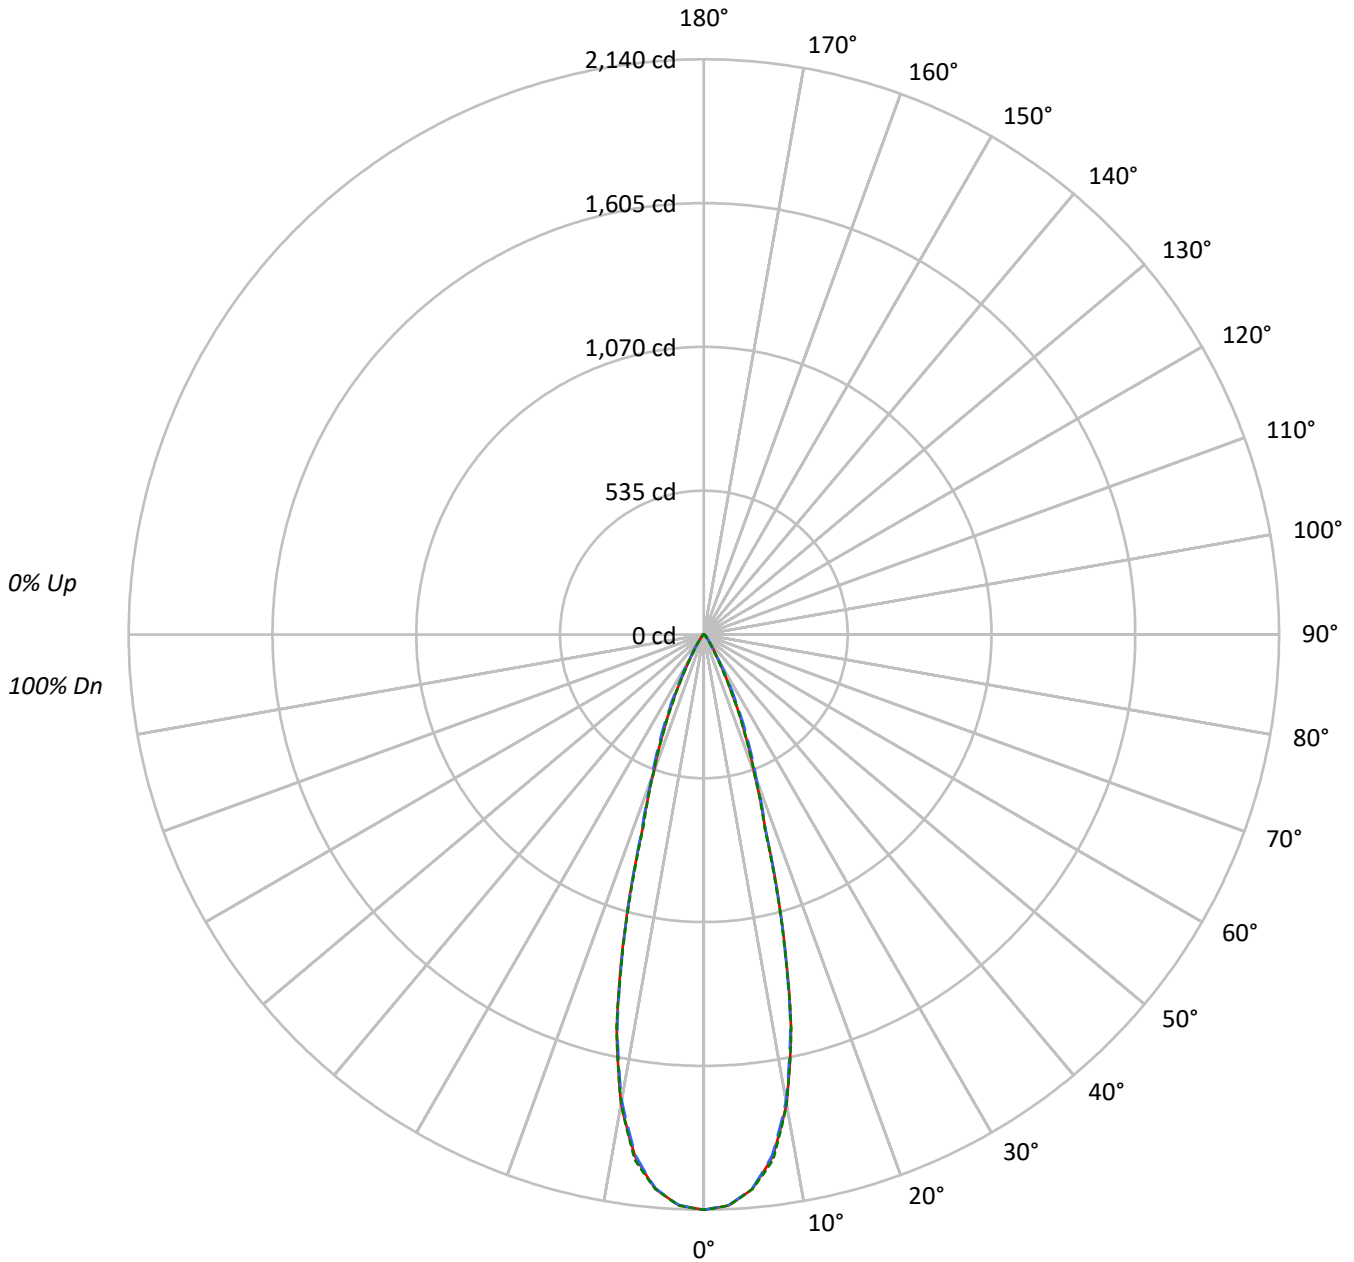



TEST NUMBER: P777387

CATALOG NUMBER: LERS4D05D010-EC4DR300210IC9050-4LBS1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96						96													
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92						92													
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89						89													
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85						85													
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82						82													
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79						79													
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77						77													
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74						74													
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72						72													
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69						69													

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	163818	163818	163818
5°	159119	158935	159127
10°	137821	136849	137789
15°	89918	89442	88991
20°	44711	46389	44654
25°	22524	25396	22060
30°	9015	9828	7857
35°	4177	4009	3355
40°	1799	2008	1699
45°	1267	1580	1288
50°	441	1155	464
55°	254	480	267
60°	168	214	168
65°	109	109	109
70°	67	45	67
75°	0	30	0
80°	0	0	0
85°	0	0	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 22.5°  
 Vertical Angle: 45°  
 Luminance: 1580 cd/sqm



TEST NUMBER: P777387

CATALOG NUMBER: LERS4D05D010-EC4DR300210IC9050-4LBS1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	188.2	28.3
10°-20°	303.1	45.5
20°-30°	131.0	19.7
30°-40°	29.9	4.5
40°-50°	10.2	1.5
50°-60°	2.5	0.4
60°-70°	0.6	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	622.3	93.5
0°-40°	652.1	98.0
0°-60°	664.9	99.9
0°-90°	665.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	665.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2140	2140	2140	2140	2140	
5°	2071	2069	2068	2073	2071	188
15°	1135	1121	1129	1125	1123	304
25°	267	277	301	270	261	128
35°	45	46	43	43	36	30
45°	12	15	15	15	12	8
55°	2	2	4	2	2	2
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P777387

CATALOG NUMBER: LERS4D05D010-EC4DR300210IC9050-4LBS1MW

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2140.2	2140.2	2140.2	2140.2	2140.2
2.5°	2126.0	2124.6	2125.4	2126.4	2126.9
5°	2070.9	2068.9	2068.5	2072.8	2071.0
7.5°	1959.6	1956.7	1952.4	1962.2	1971.4
10°	1773.2	1770.0	1760.7	1765.3	1772.8
12.5°	1498.0	1487.8	1487.6	1502.3	1500.3
15°	1134.7	1121.1	1128.7	1124.9	1123.0
17.5°	763.1	757.8	767.9	764.8	751.7
20°	548.9	550.3	569.5	559.8	548.2
22.5°	400.5	405.5	428.3	403.4	394.2
25°	266.7	276.8	300.7	269.7	261.2
27.5°	164.0	168.7	192.9	161.9	157.3
30°	102.0	99.7	111.2	95.4	88.9
32.5°	66.9	64.0	67.7	60.7	55.5
35°	44.7	45.7	42.9	42.6	35.9
37.5°	28.0	32.1	28.4	30.3	23.1
40°	18.0	23.3	20.1	22.2	17.0
42.5°	14.8	18.0	16.5	17.5	15.1
45°	11.7	14.6	14.6	14.6	11.9
47.5°	6.5	9.8	12.5	10.0	6.9
50°	3.7	4.9	9.7	5.2	3.9
52.5°	2.5	2.9	6.6	2.9	2.6
55°	1.9	2.0	3.6	2.1	2.0
57.5°	1.5	1.6	1.9	1.6	1.5
60°	1.1	1.1	1.4	1.3	1.1
62.5°	0.9	0.9	1.0	0.9	0.9
65°	0.6	0.6	0.6	0.6	0.6
67.5°	0.3	0.4	0.4	0.4	0.4
70°	0.3	0.2	0.2	0.2	0.3
72.5°	0.2	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)