

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P778344

Luminaire Tested: LERS4D15D010-EC4DR350215IC9050-4LBS1B

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P778344  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LERS4D15D010-EC4DR350215IC9050-4LBS1B  
Description: 4 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 35° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1346.6 lumens  
Efficiency: N/A  
Efficacy: 85.2 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 15.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P778344

CATALOG NUMBER: LERS4D15D010-EC4DR350215IC9050-4LBS1B

### Luminous Intensity Polar Plot

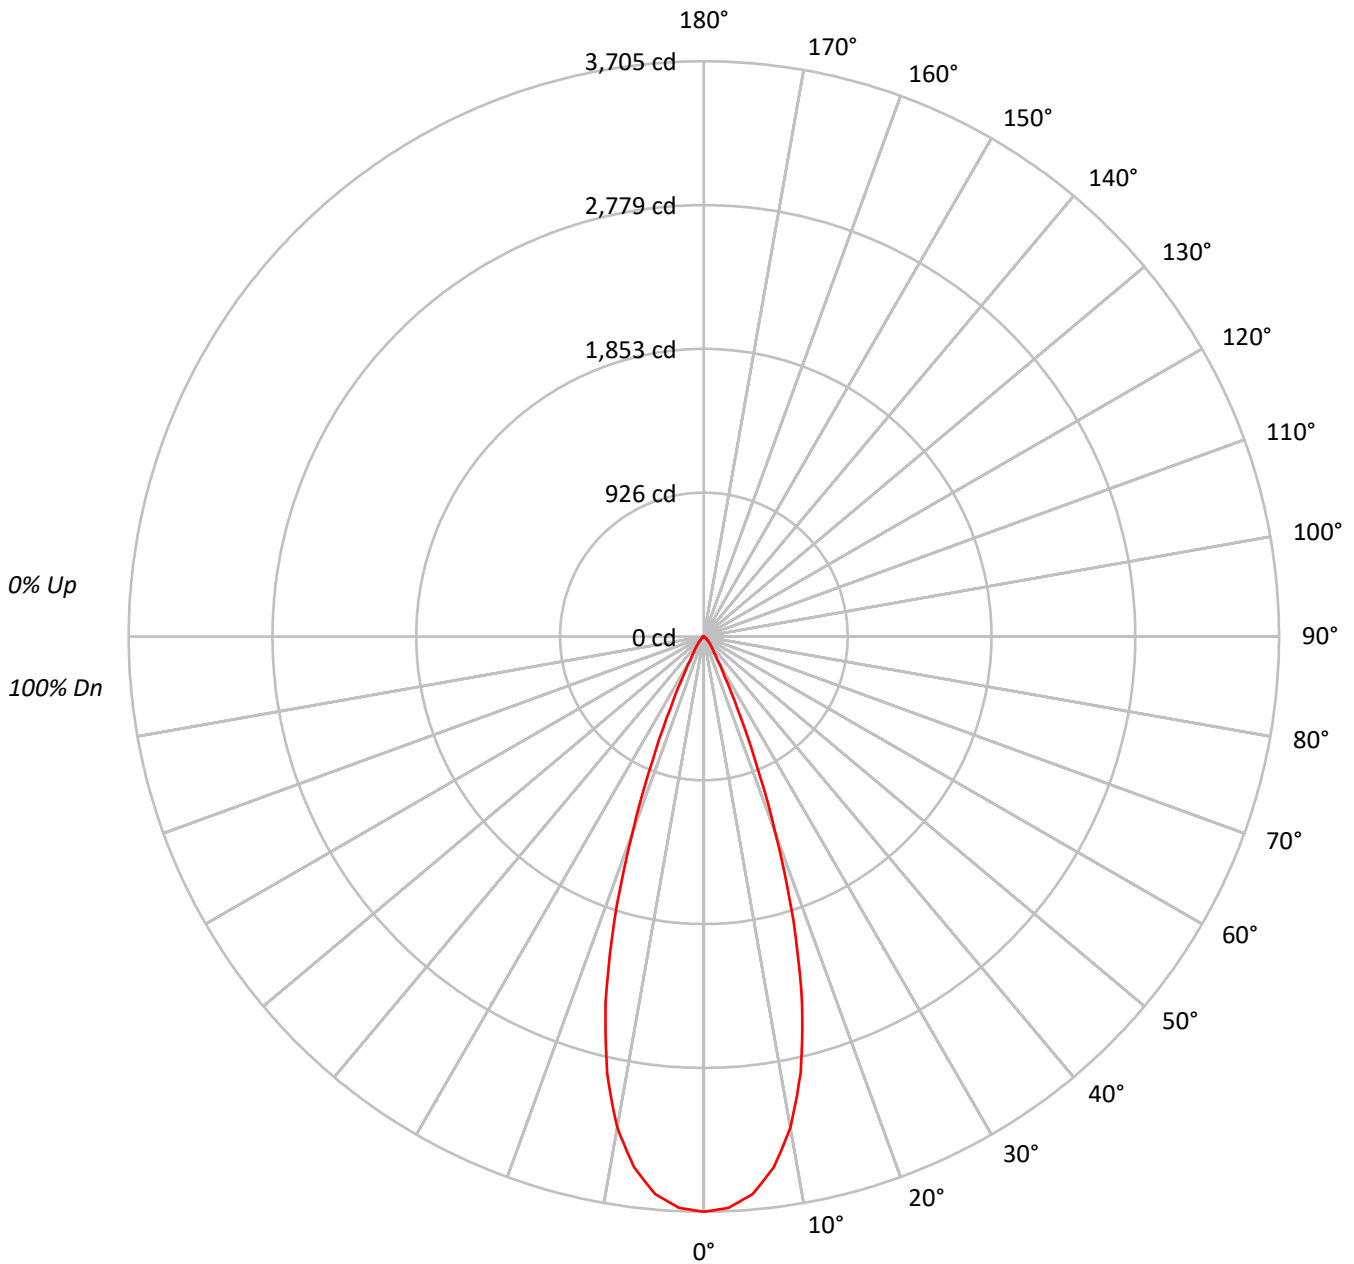



TEST NUMBER: P778344

CATALOG NUMBER: LERS4D15D010-EC4DR350215IC9050-4LBS1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96	96	96	96
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92	92	92	92
3	106	101	97	94	105	100	96	94	97	95	92	95	93	91	93	91	89	88	88	88	88
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84	84	84	84
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81	81	81	81
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78	78	78	78
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75	75	75	75
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72	72	72	72
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70	70	70	70
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68	68	68	68

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	404844
5°	395335
10°	356293
15°	276544
20°	156852
25°	61025
30°	22760
35°	12485
40°	8158
45°	4960
50°	3162
55°	2229
60°	1617
65°	879
70°	64
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 4960 cd/sqm



TEST NUMBER: P778344

CATALOG NUMBER: LERS4D15D010-EC4DR350215IC9050-4LBS1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	331.5	24.6
10°-20°	647.2	48.1
20°-30°	264.0	19.6
30°-40°	63.2	4.7
40°-50°	26.3	2.0
50°-60°	10.9	0.8
60°-70°	3.4	0.3
70°-80°	0.1	0.0
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1242.7	92.3
0°-40°	1305.9	97.0
0°-60°	1343.1	99.7
0°-90°	1346.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1346.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3705	
5°	3604	332
15°	2445	647
25°	506	264
35°	94	63
45°	32	26
55°	12	11
65°	3	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P778344

CATALOG NUMBER: LERS4D15D010-EC4DR350215IC9050-4LBS1B

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	3705.3
2.5°	3683.1
5°	3604.5
7.5°	3447.7
10°	3211.4
12.5°	2878.8
15°	2444.8
17.5°	1914.0
20°	1349.0
22.5°	860.2
25°	506.2
27.5°	286.1
30°	180.4
32.5°	126.7
35°	93.6
37.5°	72.4
40°	57.2
42.5°	44.1
45°	32.1
47.5°	24.1
50°	18.6
52.5°	14.7
55°	11.7
57.5°	9.5
60°	7.4
62.5°	5.4
65°	3.4
67.5°	1.2
70°	0.2
72.5°	0.2
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.2
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)