

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P210904

Luminaire Tested: **LE_4B10D010 EC4B10208035 4LBPS1MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P210904
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LE_4B10D010 EC4B10208035 4LBPS1MW
Description: PORTFOLIO 4 INCH CYLINDER
SHALLOW DISTRIBUTION WITH PLASTIC MATTE WHITE TRIM
WATTAGE D010TR-10.05W DE010-10.58W D5LT-10.2W DMX-10.6W DL2-11.8W
DL3-11.1W DLE-11.39W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1360.8 lumens
Efficiency: N/A
Efficacy: 137.5 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.34
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P210904

CATALOG NUMBER: LE_4B10D010 EC4B10208035 4LBPS1MW

Luminous Intensity Polar Plot

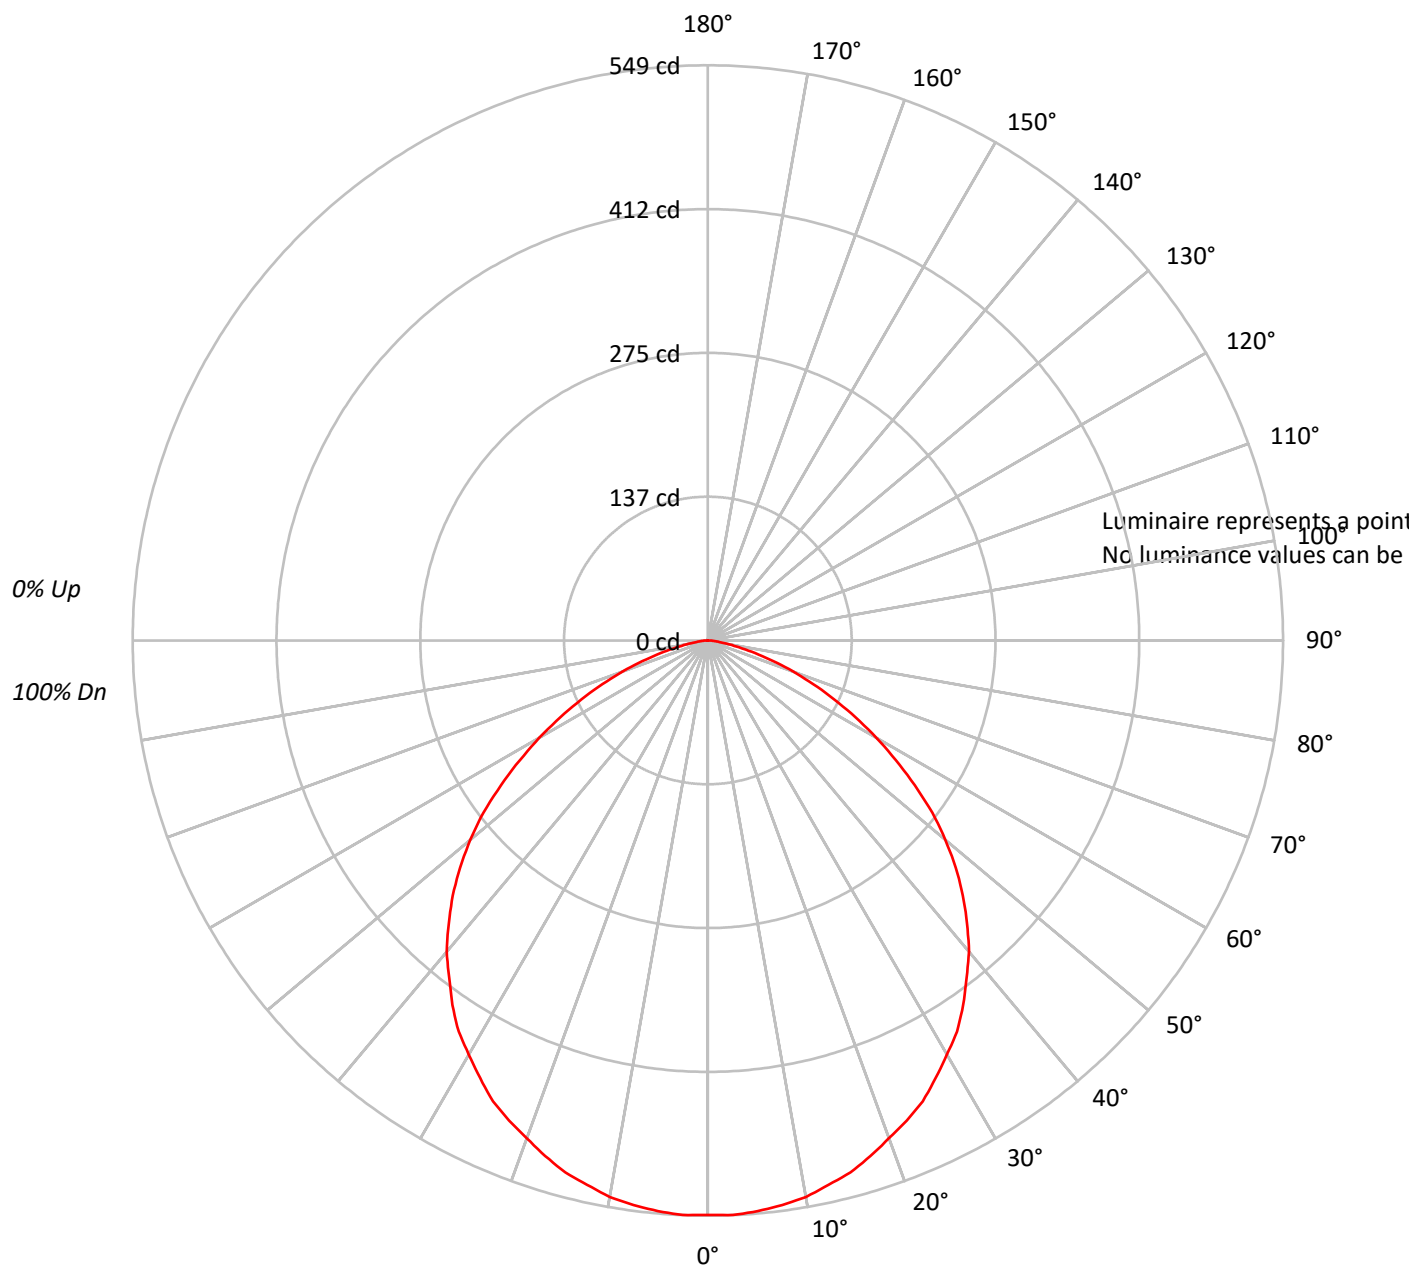



TEST NUMBER: P210904

CATALOG NUMBER: LE_4B10D010 EC4B10208035 4LBPS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	110	106	102	99	107	104	100	97	99	97	94		96	93	91		92
2	101	93	87	82	98	92	86	81	88	83	79		85	81	77		82
3	93	83	75	69	90	81	74	69	78	72	67		76	70	66		73
4	85	74	65	59	83	72	65	59	70	63	58		68	62	57		66
5	78	66	58	51	76	65	57	51	63	56	51		61	55	50		59
6	73	60	51	45	71	59	51	45	57	50	44		55	49	44		54
7	67	54	46	40	66	54	46	40	52	45	40		51	44	39		49
8	63	50	41	36	61	49	41	36	48	41	35		46	40	35		45
9	59	46	38	32	57	45	37	32	44	37	32		43	36	32		42
10	55	42	34	29	54	42	34	29	41	34	29		40	33	29		39

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P210904

CATALOG NUMBER: LE_4B10D010 EC4B10208035 4LBPS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	52.0	3.8
10°-20°	148.1	10.9
20°-30°	223.0	16.4
30°-40°	265.4	19.5
40°-50°	264.9	19.5
50°-60°	215.4	15.8
60°-70°	132.5	9.7
70°-80°	51.3	3.8
80°-90°	8.2	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	423.0	31.1
0°-40°	688.4	50.6
0°-60°	1168.7	85.9
0°-90°	1360.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1360.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	548	
5°	547	52
15°	526	148
25°	485	223
35°	425	265
45°	344	265
55°	241	215
65°	133	133
75°	47	51
85°	6	8
90°	0	



TEST NUMBER: P210904

CATALOG NUMBER: LE_4B10D010 EC4B10208035 4LBPS1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	548.2
2.5°	549.0
5°	546.7
7.5°	543.5
10°	539.4
12.5°	532.1
15°	525.7
17.5°	516.0
20°	505.5
22.5°	495.9
25°	485.3
27.5°	470.8
30°	456.3
32.5°	442.7
35°	424.9
37.5°	405.5
40°	387.8
42.5°	366.1
45°	344.3
47.5°	320.9
50°	295.9
52.5°	270.0
55°	241.0
57.5°	212.9
60°	185.5
62.5°	158.8
65°	133.1
67.5°	108.8
70°	86.3
72.5°	65.3
75°	46.7
77.5°	30.6
80°	18.6
82.5°	11.3
85°	6.5
87.5°	3.2
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)