

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P210964

Luminaire Tested: **LE\_4B10D010 EC4B10208040 4LBS1GPH**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P210964  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LE\_4B10D010 EC4B10208040 4LBS1GPH  
Description: PORTFOLIO 4 INCH CYLINDER  
SHALLOW DISTRIBUTION WITH GRAPHITE HAZE TRIM  
WATTAGE D010TR-10.05W DE010-10.58W D5LT-10.2W DMX-10.6W DL2-11.8W  
DL3-11.1W DLE-11.39W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1162.7 lumens  
Efficiency: N/A  
Efficacy: 117.4 lumens/watt  
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.26  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 9.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P210964

CATALOG NUMBER: LE\_4B10D010 EC4B10208040 4LBS1GPH

### Luminous Intensity Polar Plot

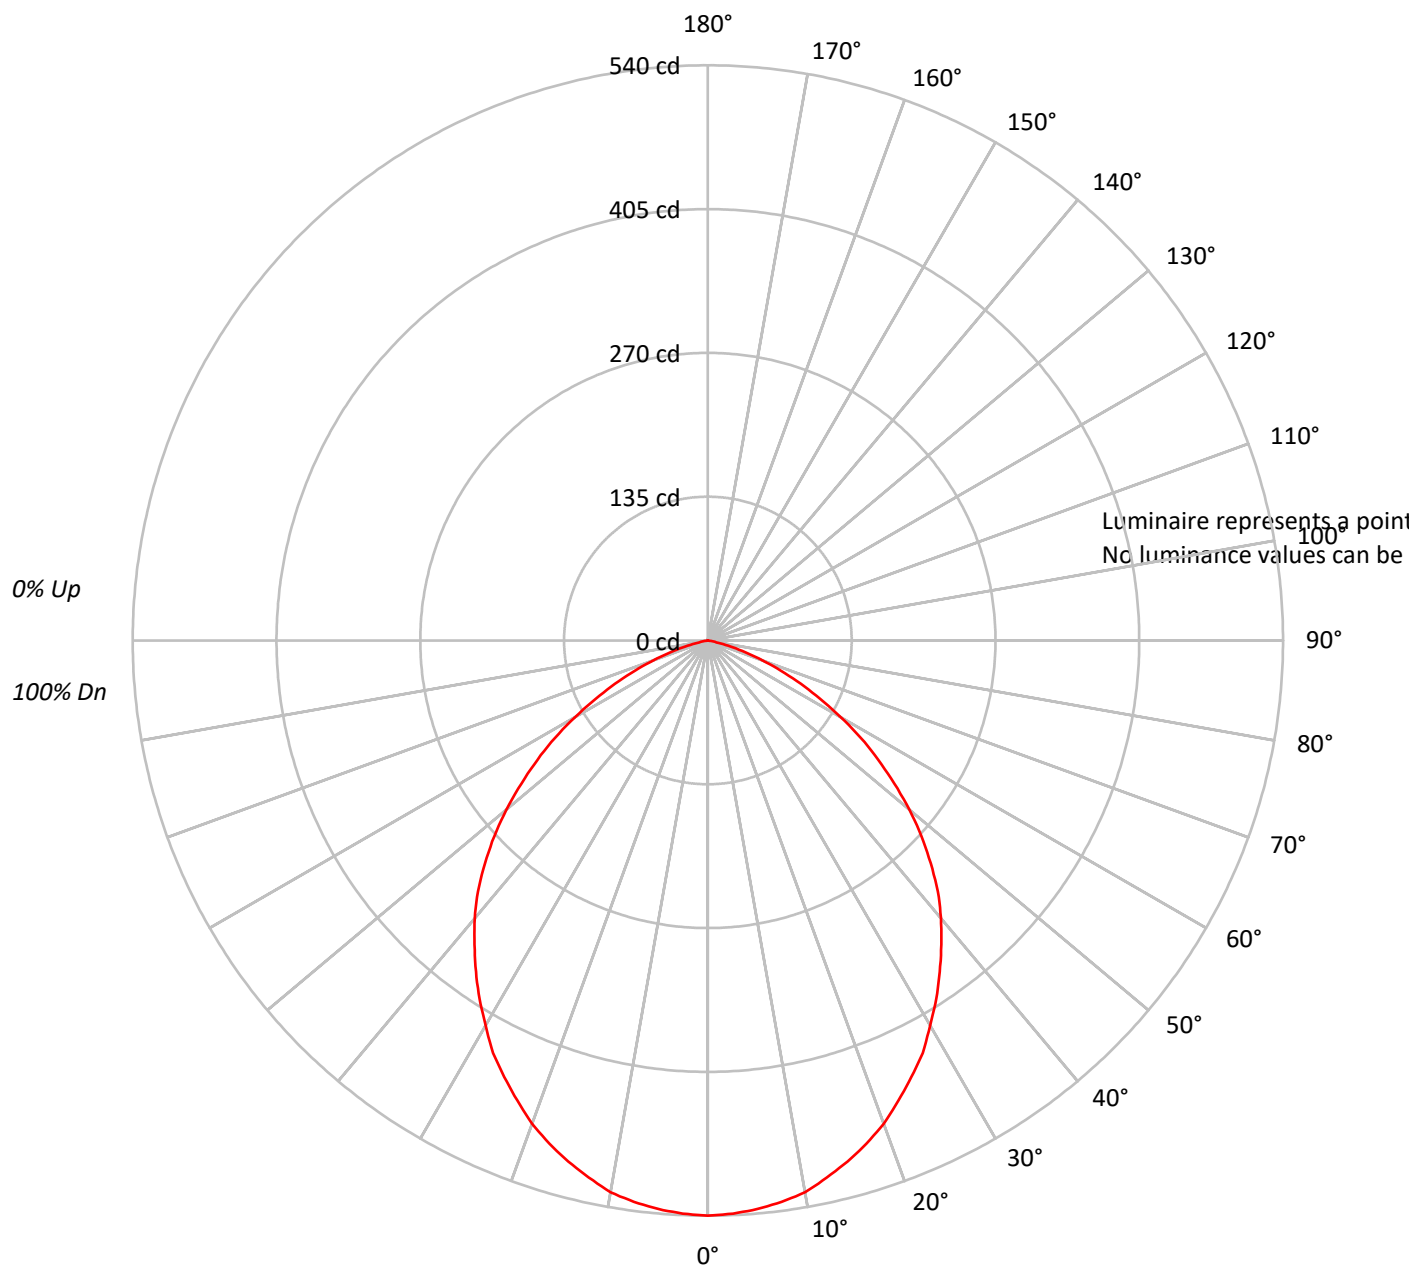



TEST NUMBER: P210964

CATALOG NUMBER: LE\_4B10D010 EC4B10208040 4LBS1GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |  |     |     |     |     |  |     |     |     |  |     |     |     |  |     |     |     |
|-----|-----|-----|-----|-----|--|-----|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|
| RF  | 20  |     |     |     |  | 20  |     |     |     |  | 20  |     |     |  |     | 20  |     |  |     |     | 20  |
| RC  | 80  |     |     |     |  | 70  |     |     |     |  | 50  |     |     |  |     | 30  |     |  |     |     | 10  |
| RW  | 70  | 50  | 30  | 10  |  | 70  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  |
| RCR |     |     |     |     |  |     |     |     |     |  |     |     |     |  |     |     |     |  |     |     |     |
| 0   | 119 | 119 | 119 | 119 |  | 116 | 116 | 116 | 116 |  | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 | 102 | 102 |
| 1   | 111 | 107 | 103 | 100 |  | 108 | 105 | 102 | 99  |  | 101 | 98  | 96  |  | 97  | 95  | 93  |  | 93  | 91  | 90  |
| 2   | 102 | 95  | 89  | 84  |  | 100 | 93  | 88  | 83  |  | 90  | 85  | 82  |  | 87  | 83  | 80  |  | 84  | 81  | 78  |
| 3   | 94  | 85  | 78  | 72  |  | 92  | 83  | 77  | 71  |  | 80  | 75  | 70  |  | 78  | 73  | 69  |  | 75  | 71  | 68  |
| 4   | 87  | 76  | 68  | 62  |  | 85  | 75  | 67  | 62  |  | 72  | 66  | 61  |  | 70  | 65  | 60  |  | 68  | 63  | 59  |
| 5   | 80  | 68  | 60  | 54  |  | 78  | 67  | 60  | 54  |  | 65  | 59  | 53  |  | 63  | 58  | 53  |  | 62  | 56  | 52  |
| 6   | 74  | 62  | 54  | 48  |  | 73  | 61  | 53  | 48  |  | 59  | 52  | 47  |  | 58  | 52  | 47  |  | 56  | 51  | 47  |
| 7   | 69  | 57  | 48  | 43  |  | 68  | 56  | 48  | 43  |  | 54  | 47  | 42  |  | 53  | 47  | 42  |  | 52  | 46  | 42  |
| 8   | 65  | 52  | 44  | 38  |  | 63  | 51  | 44  | 38  |  | 50  | 43  | 38  |  | 49  | 42  | 38  |  | 48  | 42  | 38  |
| 9   | 60  | 48  | 40  | 35  |  | 59  | 47  | 40  | 35  |  | 46  | 39  | 35  |  | 45  | 39  | 34  |  | 44  | 38  | 34  |
| 10  | 57  | 44  | 37  | 32  |  | 56  | 44  | 36  | 32  |  | 43  | 36  | 31  |  | 42  | 36  | 31  |  | 41  | 35  | 31  |

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P210964

CATALOG NUMBER: LE\_4B10D010 EC4B10208040 4LBS1GPH

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 50.8   | 4.4       |
| 10°-20°   | 142.7  | 12.3      |
| 20°-30°   | 208.2  | 17.9      |
| 30°-40°   | 237.4  | 20.4      |
| 40°-50°   | 227.7  | 19.6      |
| 50°-60°   | 174.4  | 15.0      |
| 60°-70°   | 95.7   | 8.2       |
| 70°-80°   | 25.4   | 2.2       |
| 80°-90°   | 0.4    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 401.7  | 34.6      |
| 0°-40°    | 639.1  | 55.0      |
| 0°-60°    | 1041.2 | 89.5      |
| 0°-90°    | 1162.7 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1162.7 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 540 |      |
| 5°  | 536 | 51   |
| 15° | 506 | 143  |
| 25° | 452 | 208  |
| 35° | 380 | 237  |
| 45° | 296 | 228  |
| 55° | 195 | 174  |
| 65° | 96  | 96   |
| 75° | 22  | 25   |
| 85° | 0   | 0    |
| 90° | 0   |      |



TEST NUMBER: P210964

CATALOG NUMBER: LE\_4B10D010 EC4B10208040 4LBS1GPH

**CANDELA DISTRIBUTION (FULL):**

|       | 0°    |
|-------|-------|
| 0°    | 540.0 |
| 2.5°  | 538.6 |
| 5°    | 535.8 |
| 7.5°  | 531.6 |
| 10°   | 526.1 |
| 12.5° | 516.3 |
| 15°   | 506.5 |
| 17.5° | 495.3 |
| 20°   | 482.8 |
| 22.5° | 467.5 |
| 25°   | 452.1 |
| 27.5° | 436.7 |
| 30°   | 417.3 |
| 32.5° | 399.0 |
| 35°   | 379.6 |
| 37.5° | 359.9 |
| 40°   | 340.5 |
| 42.5° | 319.6 |
| 45°   | 295.8 |
| 47.5° | 272.1 |
| 50°   | 247.0 |
| 52.5° | 220.5 |
| 55°   | 195.3 |
| 57.5° | 170.2 |
| 60°   | 143.7 |
| 62.5° | 118.6 |
| 65°   | 96.3  |
| 67.5° | 74.0  |
| 70°   | 54.4  |
| 72.5° | 36.3  |
| 75°   | 22.3  |
| 77.5° | 9.7   |
| 80°   | 2.8   |
| 82.5° | 0.0   |
| 85°   | 0.0   |
| 87.5° | 0.0   |
| 90°   | 0.0   |



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)