

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211092

Luminaire Tested: **LE_4B15D010 EC4B10208027 4LBCSM1B**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P211092
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LE_4B15D010 EC4B10208027 4LBCSM1B
Description: PORTFOLIO 4 INCH CYLINDER
SHALLOW DISTRIBUTION WITH CAST MATTE METALLIC SILVER TRIM
WATTAGE D010TR-14.39W DE010-14.29W D5LT-14.34W DMX-14.46W DL2-15.8W
DL3-15.28W DLE-15.432W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1621.6 lumens
Efficiency: N/A
Efficacy: 113.4 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P211092

CATALOG NUMBER: LE_4B15D010 EC4B10208027 4LBCSM1B

Luminous Intensity Polar Plot

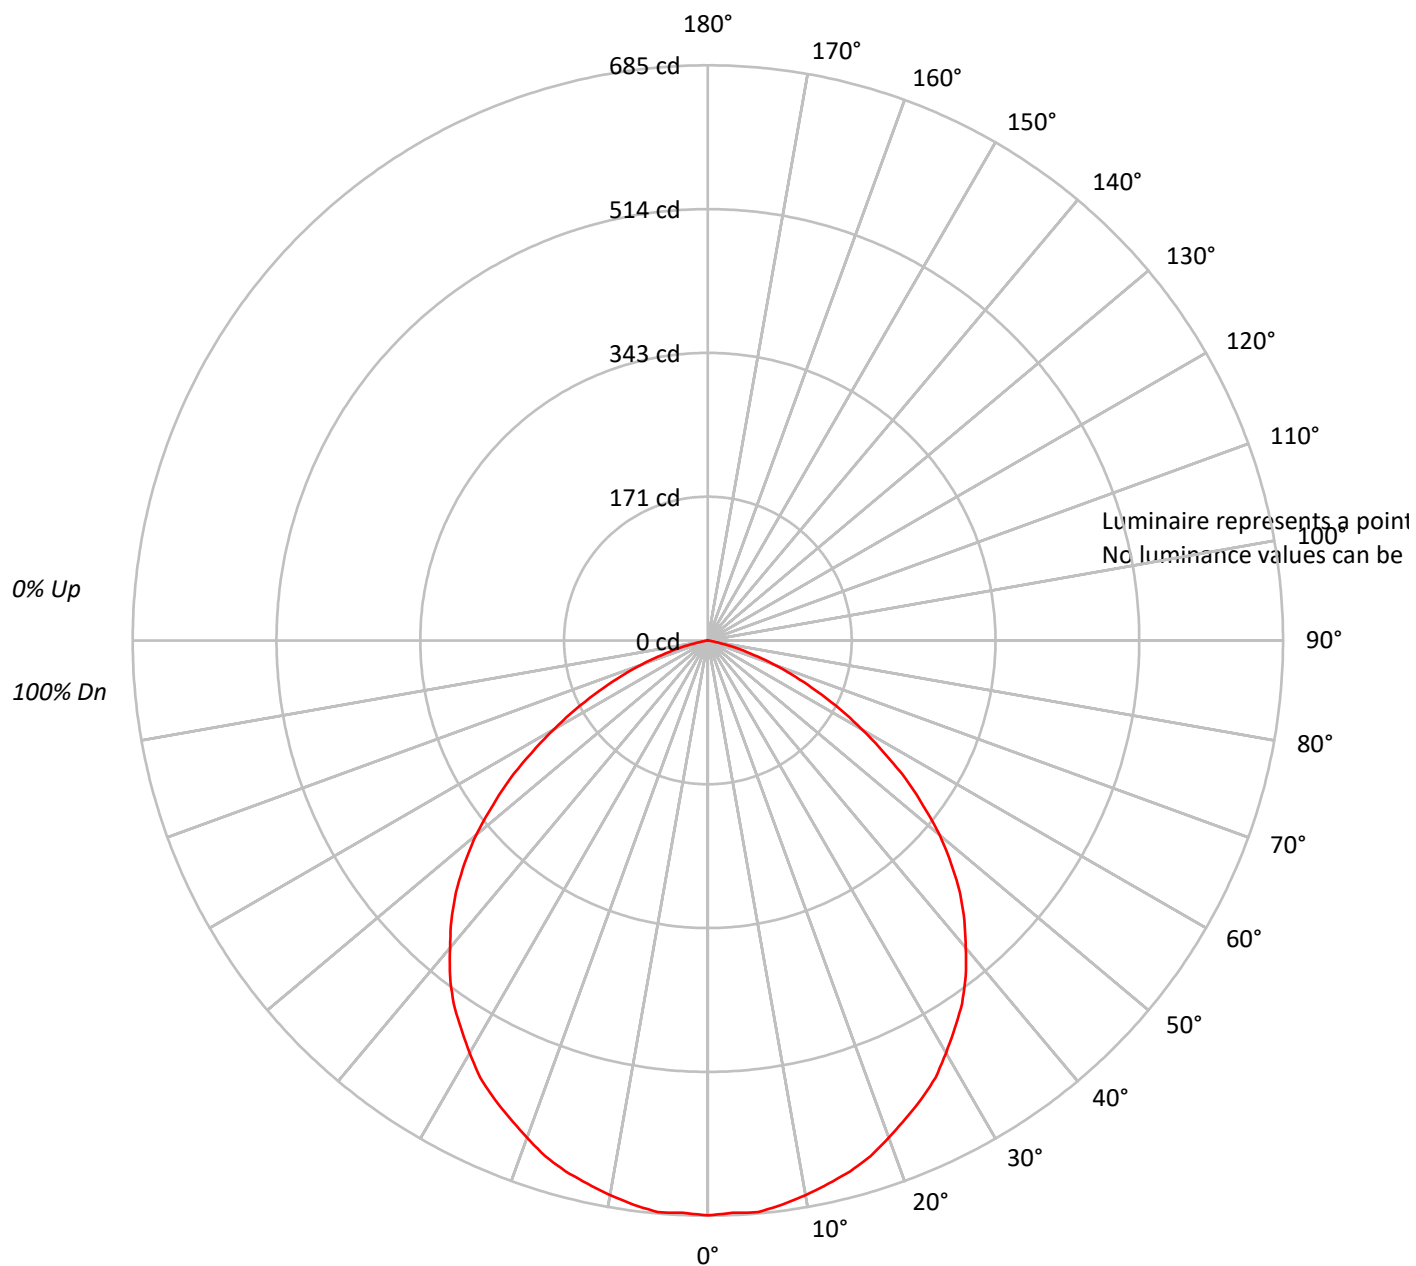



TEST NUMBER: P211092

CATALOG NUMBER: LE_4B15D010 EC4B10208027 4LBCSM1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	111	107	103	100	108	104	101	98	100	98	95	96	94	92	93	91	90	88		
2	102	95	89	84	99	93	87	83	89	85	81	86	82	79	83	80	77	75		
3	93	84	77	71	91	83	76	70	80	74	69	77	72	68	74	70	67	65		
4	86	75	67	61	84	74	66	61	71	65	60	69	63	59	67	62	58	56		
5	79	67	59	53	77	66	59	53	64	57	52	62	56	52	61	55	51	49		
6	74	61	53	47	72	60	52	46	58	51	46	57	50	46	55	50	45	43		
7	68	55	47	41	67	55	47	41	53	46	41	52	45	41	50	45	40	39		
8	64	51	43	37	62	50	42	37	49	42	37	48	41	37	46	41	36	35		
9	60	47	39	33	58	46	39	33	45	38	33	44	38	33	43	37	33	31		
10	56	43	35	30	55	43	35	30	42	35	30	41	34	30	40	34	30	28		

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P211092

CATALOG NUMBER: LE_4B15D010 EC4B10208027 4LBCSM1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	64.8	4.0
10°-20°	184.5	11.4
20°-30°	277.4	17.1
30°-40°	329.1	20.3
40°-50°	325.7	20.1
50°-60°	255.8	15.8
60°-70°	143.4	8.8
70°-80°	40.3	2.5
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	526.6	32.5
0°-40°	855.7	52.8
0°-60°	1437.2	88.6
0°-90°	1621.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1621.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	685	
5°	684	65
15°	654	184
25°	602	277
35°	528	329
45°	424	326
55°	288	256
65°	143	143
75°	35	40
85°	0	1
90°	0	



TEST NUMBER: P211092

CATALOG NUMBER: LE_4B15D010 EC4B10208027 4LBCSM1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	684.6
2.5°	682.3
5°	683.5
7.5°	677.7
10°	670.7
12.5°	662.6
15°	654.5
17.5°	644.0
20°	630.0
22.5°	616.1
25°	602.2
27.5°	587.1
30°	567.2
32.5°	547.5
35°	527.8
37.5°	504.5
40°	477.8
42.5°	452.2
45°	424.3
47.5°	392.9
50°	360.4
52.5°	323.2
55°	288.3
57.5°	248.8
60°	211.6
62.5°	177.8
65°	143.0
67.5°	112.8
70°	83.8
72.5°	57.0
75°	34.9
77.5°	17.4
80°	4.6
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)