

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211103

Luminaire Tested: **LE\_4B15D010 EC4B10208027 4LBN1H**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P211103  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LE\_4B15D010 EC4B10208027 4LBN1H  
Description: PORTFOLIO 4 INCH CYLINDER  
NARROW DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM  
WATTAGE D010TR-14.39W DE010-14.29W D5LT-14.34W DMX-14.46W DL2-15.8W  
DL3-15.28W DLE-15.432W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1037.1 lumens  
Efficiency: N/A  
Efficacy: 72.5 lumens/watt  
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.85  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P211103

CATALOG NUMBER: LE\_4B15D010 EC4B10208027 4LBN1H

### Luminous Intensity Polar Plot

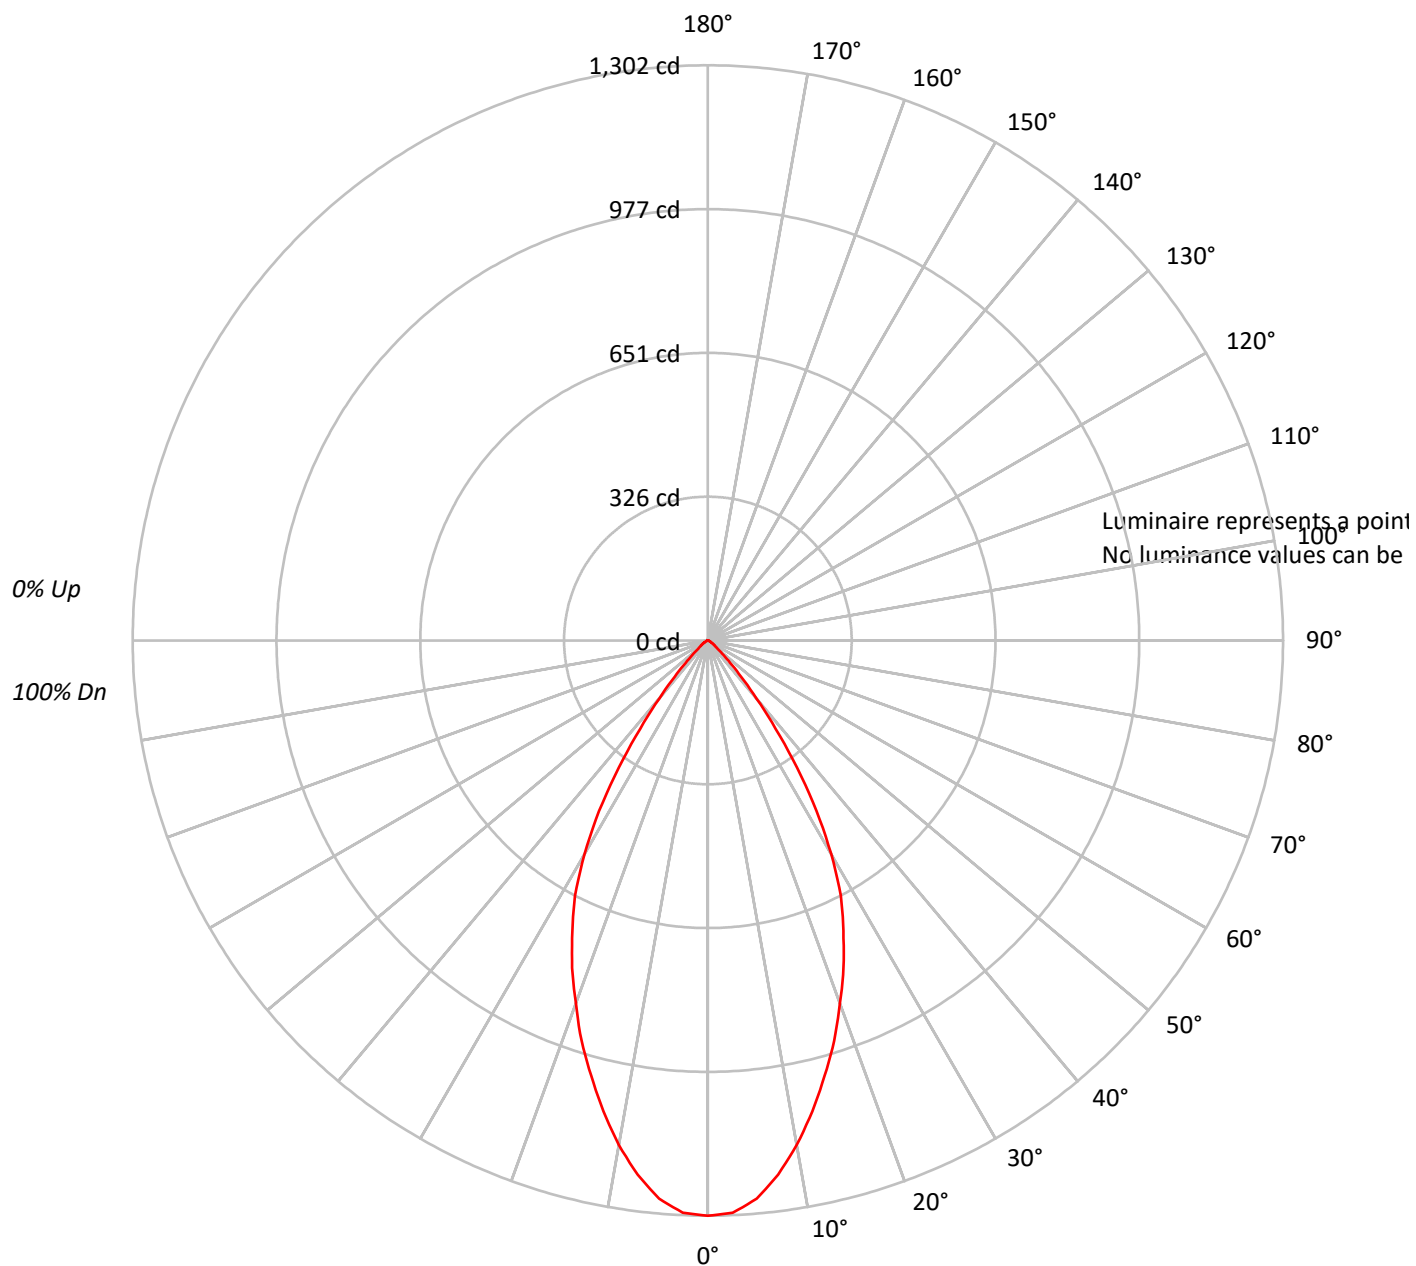



TEST NUMBER: P211103

CATALOG NUMBER: LE\_4B15D010 EC4B10208027 4LBN1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 113 | 111 | 108 | 106 | 111 | 109 | 106 | 104 | 105 | 103 | 101 |  | 101 | 99  | 98  |  | 97  |
| 2   | 108 | 103 | 99  | 96  | 106 | 101 | 98  | 94  | 98  | 95  | 92  |  | 95  | 93  | 90  |  | 92  |
| 3   | 102 | 96  | 91  | 87  | 100 | 95  | 90  | 86  | 92  | 88  | 85  |  | 90  | 86  | 84  |  | 87  |
| 4   | 97  | 90  | 84  | 80  | 95  | 89  | 83  | 79  | 86  | 82  | 78  |  | 84  | 81  | 78  |  | 83  |
| 5   | 92  | 84  | 78  | 74  | 91  | 83  | 78  | 73  | 81  | 76  | 73  |  | 80  | 75  | 72  |  | 78  |
| 6   | 88  | 79  | 73  | 69  | 86  | 78  | 72  | 68  | 77  | 72  | 68  |  | 75  | 71  | 67  |  | 74  |
| 7   | 83  | 74  | 68  | 64  | 82  | 73  | 68  | 64  | 72  | 67  | 63  |  | 71  | 66  | 63  |  | 70  |
| 8   | 79  | 70  | 64  | 60  | 78  | 69  | 64  | 60  | 68  | 63  | 59  |  | 67  | 63  | 59  |  | 66  |
| 9   | 76  | 66  | 60  | 56  | 74  | 65  | 60  | 56  | 65  | 59  | 56  |  | 64  | 59  | 56  |  | 63  |
| 10  | 72  | 62  | 57  | 53  | 71  | 62  | 56  | 53  | 61  | 56  | 53  |  | 60  | 56  | 52  |  | 60  |

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P211103

CATALOG NUMBER: LE\_4B15D010 EC4B10208027 4LBN1H

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 117.5  | 11.3      |
| 10°-20°   | 285.0  | 27.5      |
| 20°-30°   | 330.9  | 31.9      |
| 30°-40°   | 219.1  | 21.1      |
| 40°-50°   | 61.5   | 5.9       |
| 50°-60°   | 15.4   | 1.5       |
| 60°-70°   | 5.8    | 0.6       |
| 70°-80°   | 2.0    | 0.2       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 733.3  | 70.7      |
| 0°-40°    | 952.5  | 91.8      |
| 0°-60°    | 1029.4 | 99.3      |
| 0°-90°    | 1037.1 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1037.1 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1302 |      |
| 5°  | 1268 | 117  |
| 15° | 1020 | 285  |
| 25° | 725  | 331  |
| 35° | 351  | 219  |
| 45° | 72   | 61   |
| 55° | 17   | 15   |
| 65° | 6    | 6    |
| 75° | 2    | 2    |
| 85° | 0    | 0    |
| 90° | 0    |      |



TEST NUMBER: P211103

CATALOG NUMBER: LE\_4B15D010 EC4B10208027 4LBN1H

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 1302.2 |
| 2.5°  | 1296.5 |
| 5°    | 1268.3 |
| 7.5°  | 1219.5 |
| 10°   | 1159.4 |
| 12.5° | 1091.7 |
| 15°   | 1020.3 |
| 17.5° | 950.7  |
| 20°   | 873.7  |
| 22.5° | 802.4  |
| 25°   | 725.3  |
| 27.5° | 652.0  |
| 30°   | 558.1  |
| 32.5° | 458.4  |
| 35°   | 351.4  |
| 37.5° | 251.8  |
| 40°   | 171.0  |
| 42.5° | 110.9  |
| 45°   | 71.5   |
| 47.5° | 43.3   |
| 50°   | 28.2   |
| 52.5° | 20.6   |
| 55°   | 16.9   |
| 57.5° | 13.1   |
| 60°   | 9.4    |
| 62.5° | 7.5    |
| 65°   | 5.7    |
| 67.5° | 3.7    |
| 70°   | 3.7    |
| 72.5° | 1.9    |
| 75°   | 1.9    |
| 77.5° | 1.9    |
| 80°   | 0.0    |
| 82.5° | 0.0    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)