

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211167

Luminaire Tested: **LE_4B15D010 EC4B10209727 4LBS1GPH**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P211167
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LE_4B15D010 EC4B10209727 4LBS1GPH
Description: PORTFOLIO 4 INCH CYLINDER
SHALLOW DISTRIBUTION WITH GRAPHITE HAZE TRIM
WATTAGE D010TR-14.39W DE010-14.29W D5LT-14.34W DMX-14.46W DL2-15.8W
DL3-15.28W DLE-15.432W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1116.0 lumens
Efficiency: N/A
Efficacy: 78.0 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.26
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P211167

CATALOG NUMBER: LE_4B15D010 EC4B10209727 4LBS1GPH

Luminous Intensity Polar Plot

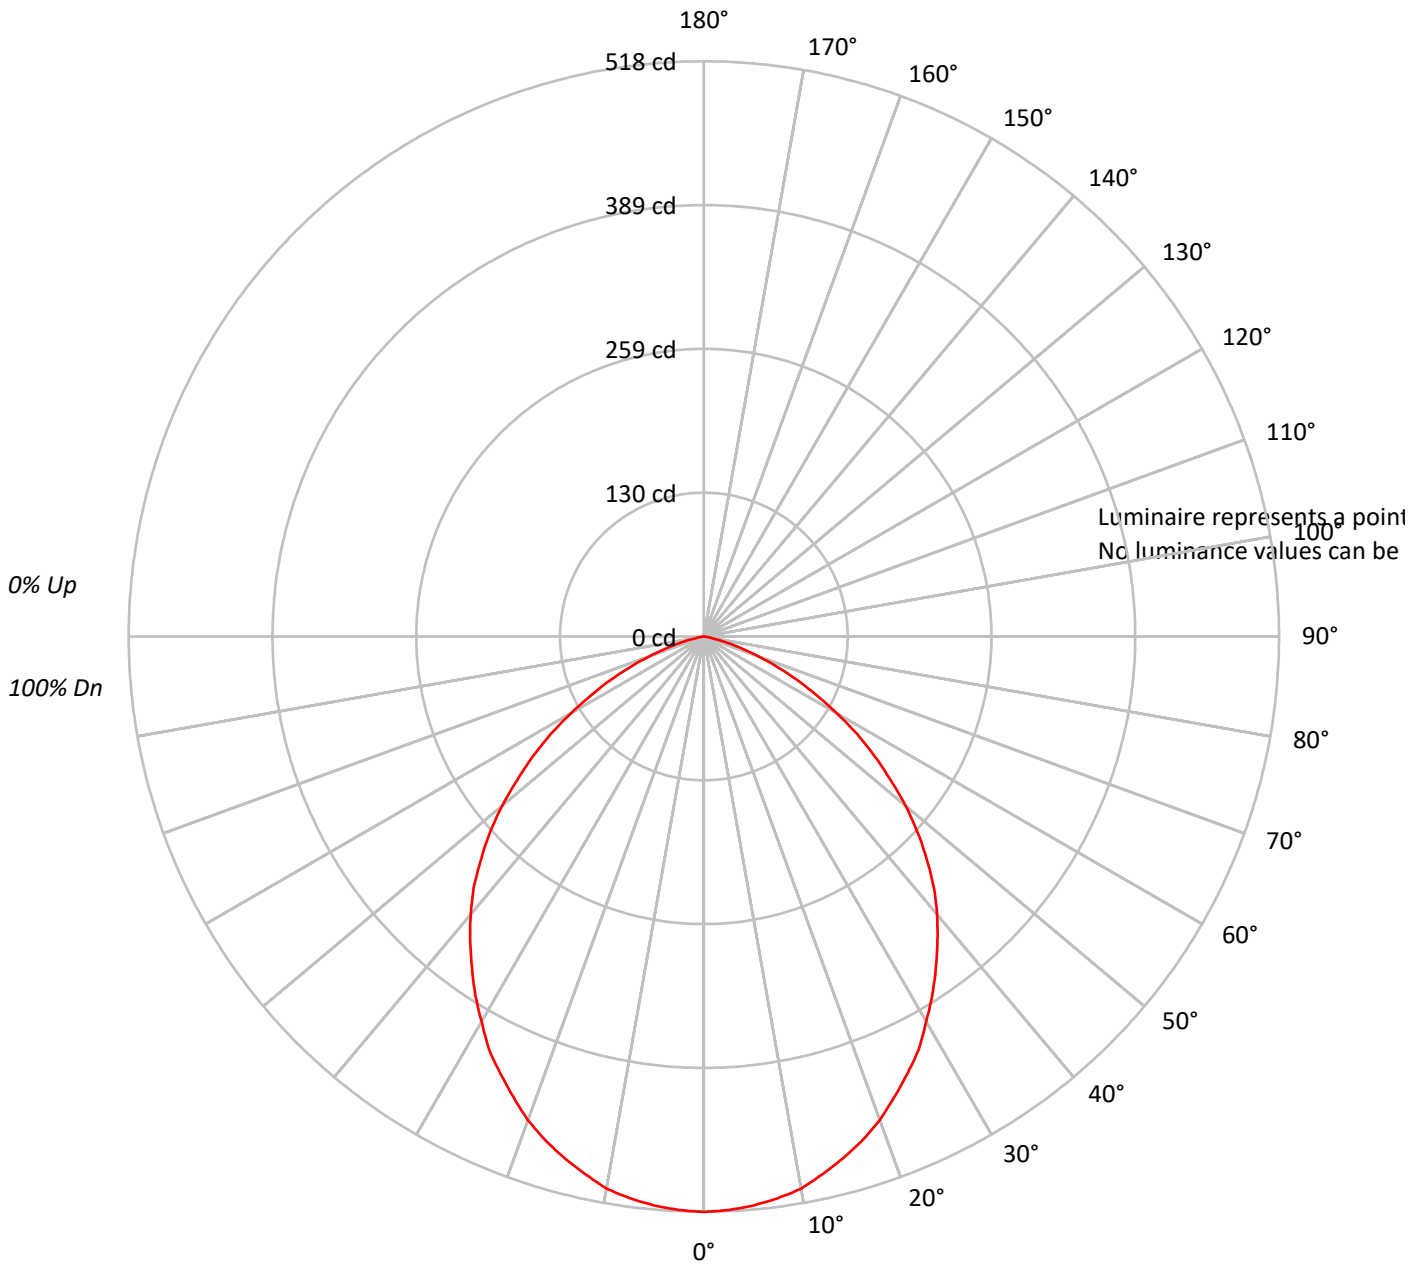



TEST NUMBER: P211167

CATALOG NUMBER: LE_4B15D010 EC4B10209727 4LBS1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	111	107	103	100	108	105	102	99	101	98	96	97	95	93	93	91	90	88				88
2	102	95	89	84	100	93	88	83	90	85	82	87	83	80	84	81	78	76				76
3	94	85	78	72	92	83	77	71	80	75	70	78	73	69	75	71	68	66				66
4	87	76	68	62	85	75	67	62	72	66	61	70	65	60	68	63	59	57				57
5	80	68	60	54	78	67	60	54	65	59	53	63	58	53	62	56	52	50				50
6	74	62	54	48	73	61	53	48	59	52	47	58	52	47	56	51	47	45				45
7	69	57	48	43	68	56	48	43	54	47	42	53	47	42	52	46	42	40				40
8	65	52	44	38	63	51	44	38	50	43	38	49	42	38	48	42	38	36				36
9	60	48	40	35	59	47	40	35	46	39	35	45	39	34	44	38	34	32				32
10	57	44	37	32	56	44	36	32	43	36	31	42	36	31	41	35	31	30				30

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P211167

CATALOG NUMBER: LE_4B15D010 EC4B10209727 4LBS1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	48.8	4.4
10°-20°	137.0	12.3
20°-30°	199.8	17.9
30°-40°	227.8	20.4
40°-50°	218.6	19.6
50°-60°	167.4	15.0
60°-70°	91.9	8.2
70°-80°	24.4	2.2
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	385.6	34.6
0°-40°	613.4	55.0
0°-60°	999.3	89.5
0°-90°	1116.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1116.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	518	
5°	514	49
15°	486	137
25°	434	200
35°	364	228
45°	284	219
55°	188	167
65°	92	92
75°	22	24
85°	0	0
90°	0	



TEST NUMBER: P211167

CATALOG NUMBER: LE_4B15D010 EC4B10209727 4LBS1GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	518.3
2.5°	517.0
5°	514.3
7.5°	510.3
10°	504.9
12.5°	495.6
15°	486.2
17.5°	475.5
20°	463.4
22.5°	448.7
25°	434.0
27.5°	419.2
30°	400.4
32.5°	383.0
35°	364.2
37.5°	345.6
40°	326.8
42.5°	306.7
45°	284.0
47.5°	261.1
50°	237.1
52.5°	211.6
55°	187.5
57.5°	163.4
60°	137.9
62.5°	113.8
65°	92.5
67.5°	71.0
70°	52.2
72.5°	34.8
75°	21.5
77.5°	9.4
80°	2.7
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)