

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211342

Luminaire Tested: **LE_4B15D010 EC4B10208040 4LBS1H**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P211342
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LE_4B15D010 EC4B10208040 4LBS1H
Description: PORTFOLIO 4 INCH CYLINDER
SHALLOW DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-14.39W DE010-14.29W D5LT-14.34W DMX-14.46W DL2-15.8W
DL3-15.28W DLE-15.432W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1764.6 lumens
Efficiency: N/A
Efficacy: 123.4 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.17
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P211342

CATALOG NUMBER: LE_4B15D010 EC4B10208040 4LBS1H

Luminous Intensity Polar Plot

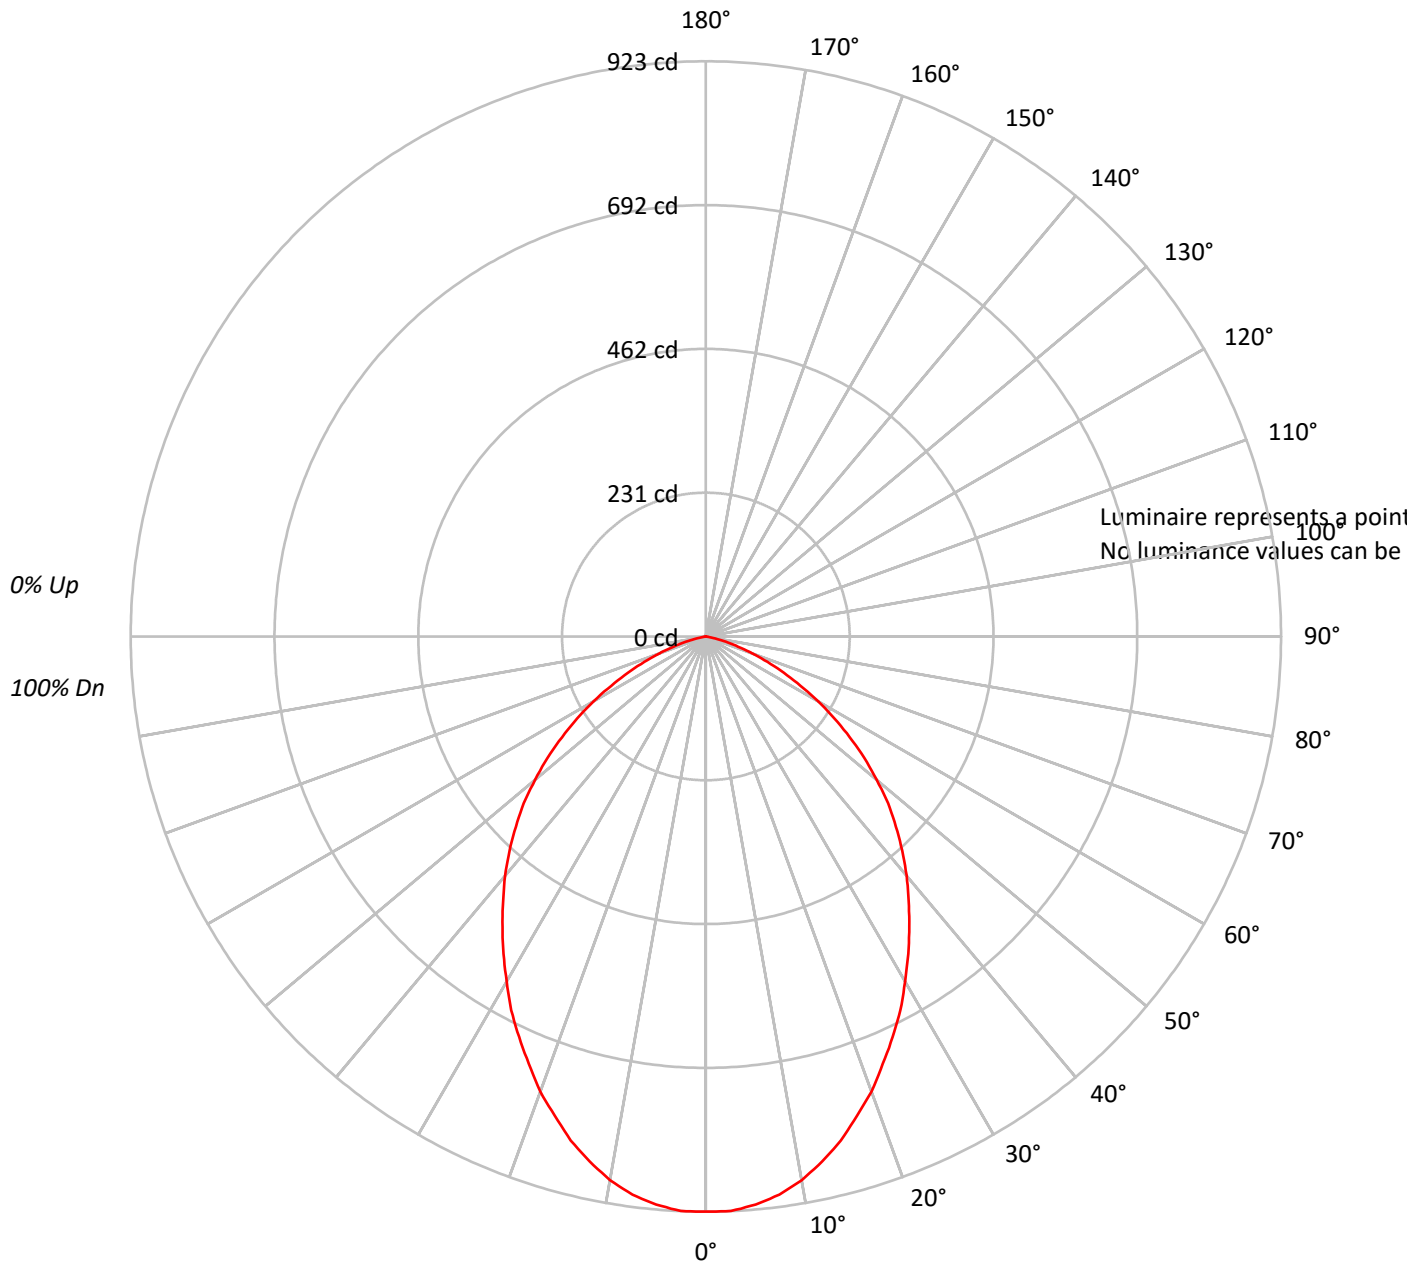



TEST NUMBER: P211342

CATALOG NUMBER: LE_4B15D010 EC4B10208040 4LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88		
2	102	96	90	85	100	94	88	84	90	86	82	87	83	80	84	81	79	77		
3	95	85	78	73	92	84	77	72	81	75	71	78	74	70	76	72	69	67		
4	87	77	69	63	85	75	68	63	73	67	62	71	65	61	69	64	60	58		
5	81	69	61	55	79	68	61	55	66	60	55	64	59	54	63	58	53	51		
6	75	63	55	49	73	62	54	49	60	54	49	59	53	48	57	52	48	46		
7	70	58	50	44	68	57	49	44	55	49	44	54	48	43	53	47	43	41		
8	65	53	45	40	64	52	45	40	51	44	39	50	44	39	49	43	39	37		
9	61	49	41	36	60	48	41	36	47	40	36	46	40	36	45	40	35	34		
10	58	45	38	33	56	45	38	33	44	37	33	43	37	33	42	37	33	31		

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P211342

CATALOG NUMBER: LE_4B15D010 EC4B10208040 4LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	86.4	4.9
10°-20°	234.9	13.3
20°-30°	326.3	18.5
30°-40°	356.0	20.2
40°-50°	332.2	18.8
50°-60°	252.1	14.3
60°-70°	138.0	7.8
70°-80°	38.0	2.2
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	647.7	36.7
0°-40°	1003.7	56.9
0°-60°	1588.0	90.0
0°-90°	1764.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1764.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	923	
5°	915	86
15°	837	235
25°	709	326
35°	569	356
45°	431	332
55°	282	252
65°	138	138
75°	33	38
85°	0	1
90°	0	



TEST NUMBER: P211342

CATALOG NUMBER: LE_4B15D010 EC4B10208040 4LBS1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	922.9
2.5°	922.9
5°	915.1
7.5°	903.4
10°	885.9
12.5°	862.6
15°	837.4
17.5°	806.3
20°	777.1
22.5°	742.2
25°	709.1
27.5°	676.2
30°	639.2
32.5°	604.2
35°	569.2
37.5°	534.3
40°	501.2
42.5°	466.3
45°	431.3
47.5°	396.4
50°	357.5
52.5°	320.6
55°	281.8
57.5°	244.8
60°	207.9
62.5°	171.0
65°	137.9
67.5°	106.8
70°	79.7
72.5°	54.4
75°	33.1
77.5°	15.5
80°	3.8
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)