

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211622

Luminaire Tested: **LE_4B20D010 EC4B10209730 4LBM1WH**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P211622
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LE_4B20D010 EC4B10209730 4LBM1WH
Description: PORTFOLIO 4 INCH CYLINDER
MEDIUM DISTRIBUTION WITH WHEAT TRIM
WATTAGE D010TR-21.86W DE010-20.46W D5LT-21.24W DMX-20.89W DL2-22.5W
DL3-21.8 6W DLE-22.46W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1346.5 lumens
Efficiency: N/A
Efficacy: 64.7 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.87
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P211622

CATALOG NUMBER: LE_4B20D010 EC4B10209730 4LBM1WH

Luminous Intensity Polar Plot

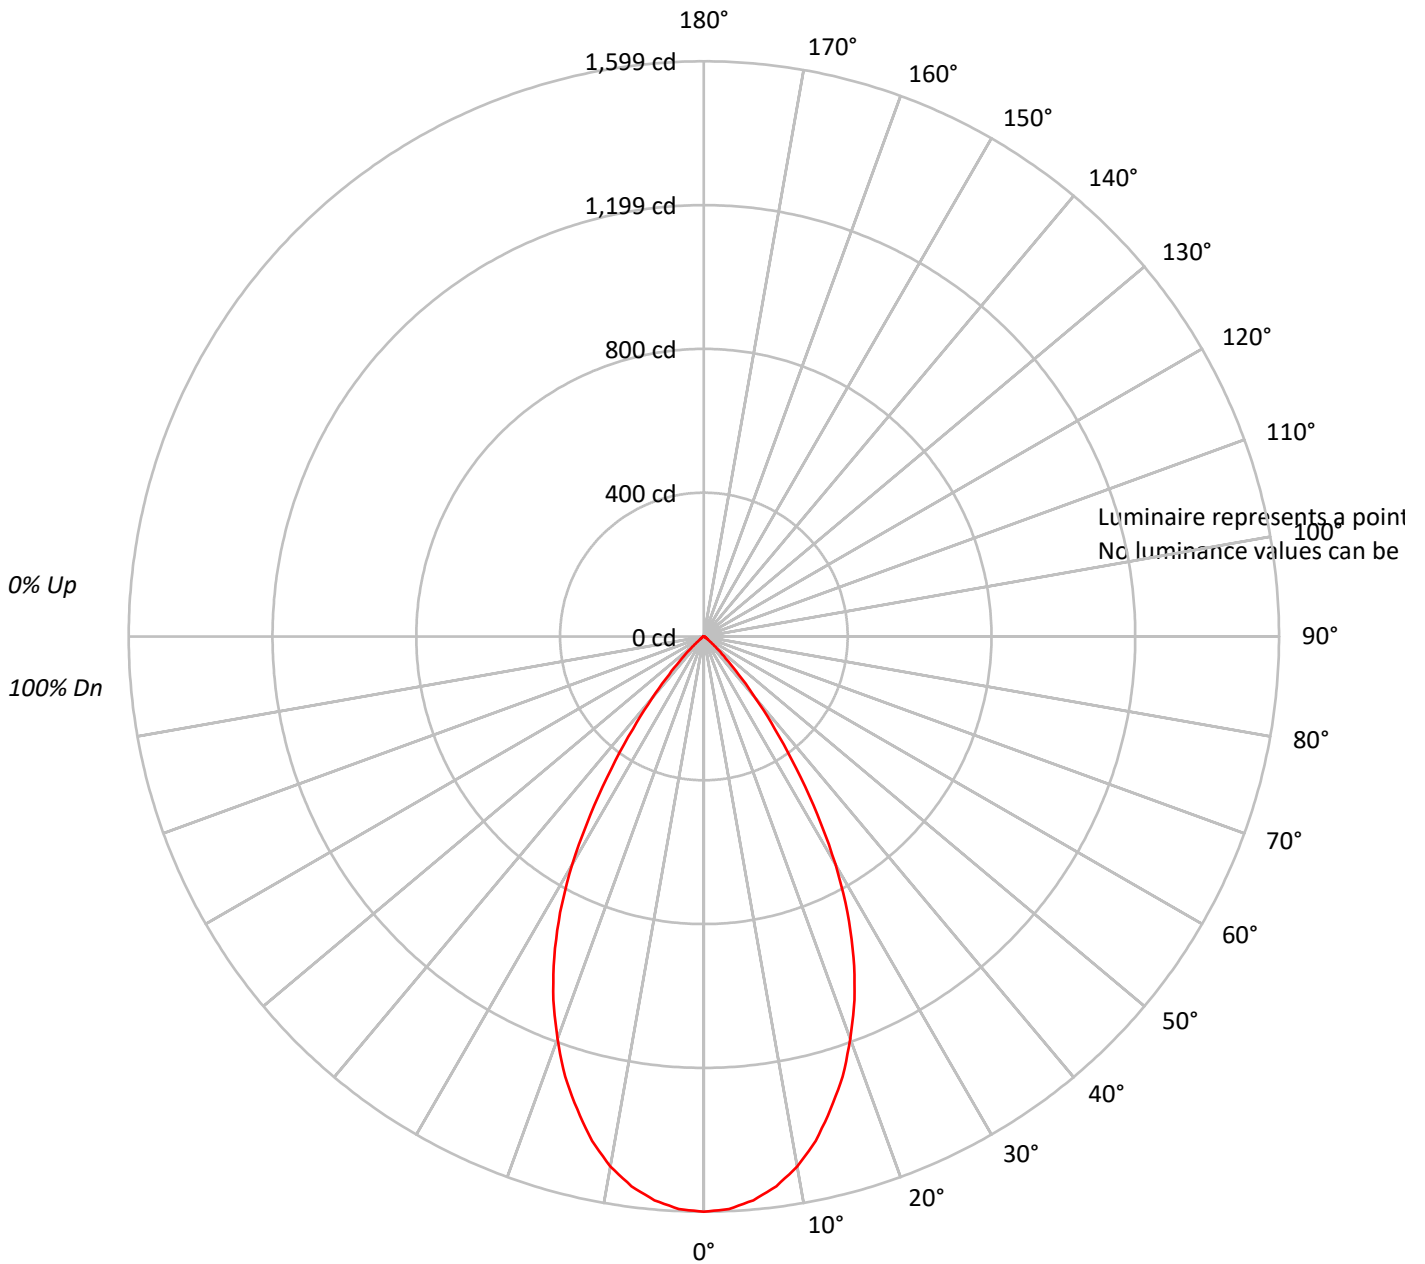



TEST NUMBER: P211622

CATALOG NUMBER: LE_4B20D010 EC4B10209730 4LBM1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	111	108	106	111	109	106	105	105	103	101	101	100	98	98	96	95	94		
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87		
3	103	96	91	88	101	95	90	87	92	89	85	90	87	84	88	85	83	81		
4	98	90	85	81	96	89	84	80	87	83	79	85	81	78	83	80	77	76		
5	93	84	79	74	91	84	78	74	82	77	73	80	76	73	79	75	72	71		
6	88	79	73	69	87	79	73	69	77	72	68	76	71	68	74	71	68	66		
7	84	75	69	65	82	74	68	64	73	68	64	72	67	64	70	66	63	62		
8	80	70	64	60	79	70	64	60	69	64	60	68	63	60	67	63	59	58		
9	76	66	61	57	75	66	60	57	65	60	56	64	60	56	63	59	56	55		
10	73	63	57	53	72	62	57	53	62	57	53	61	56	53	60	56	53	52		

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P211622

CATALOG NUMBER: LE_4B20D010 EC4B10209730 4LBM1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	147.7	11.0
10°-20°	379.8	28.2
20°-30°	445.6	33.1
30°-40°	282.0	20.9
40°-50°	75.6	5.6
50°-60°	10.6	0.8
60°-70°	3.9	0.3
70°-80°	1.3	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	973.2	72.3
0°-40°	1255.2	93.2
0°-60°	1341.3	99.6
0°-90°	1346.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1346.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1599	
5°	1573	148
15°	1361	380
25°	985	446
35°	448	282
45°	86	76
55°	10	11
65°	4	4
75°	2	1
85°	0	0
90°	0	



TEST NUMBER: P211622

CATALOG NUMBER: LE_4B20D010 EC4B10209730 4LBM1WH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1599.2
2.5°	1593.3
5°	1573.3
7.5°	1541.5
10°	1495.8
12.5°	1436.1
15°	1360.6
17.5°	1283.0
20°	1189.5
22.5°	1094.0
25°	984.6
27.5°	865.2
30°	732.0
32.5°	586.7
35°	447.5
37.5°	324.2
40°	222.7
42.5°	143.3
45°	85.5
47.5°	47.8
50°	25.9
52.5°	13.9
55°	10.0
57.5°	8.0
60°	5.9
62.5°	5.9
65°	3.9
67.5°	2.0
70°	2.0
72.5°	2.0
75°	2.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)