

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211728

Luminaire Tested: **LE\_4B20D010 EC4B10208040 4LBW1MW**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P211728  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LE\_4B20D010 EC4B10208040 4LBW1MW  
Description: PORTFOLIO 4 INCH CYLINDER  
WIDE DISTRIBUTION WITH MATTE WHITE TRIM  
WATTAGE D010TR-21.86W DE010-20.46W D5LT-21.24W DMX-20.89W DL2-22.5W  
DL3-21.8 6W DLE-22.46W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2125.1 lumens  
Efficiency: N/A  
Efficacy: 102.2 lumens/watt  
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.09  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 20.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P211728

CATALOG NUMBER: LE\_4B20D010 EC4B10208040 4LBW1MW

### Luminous Intensity Polar Plot

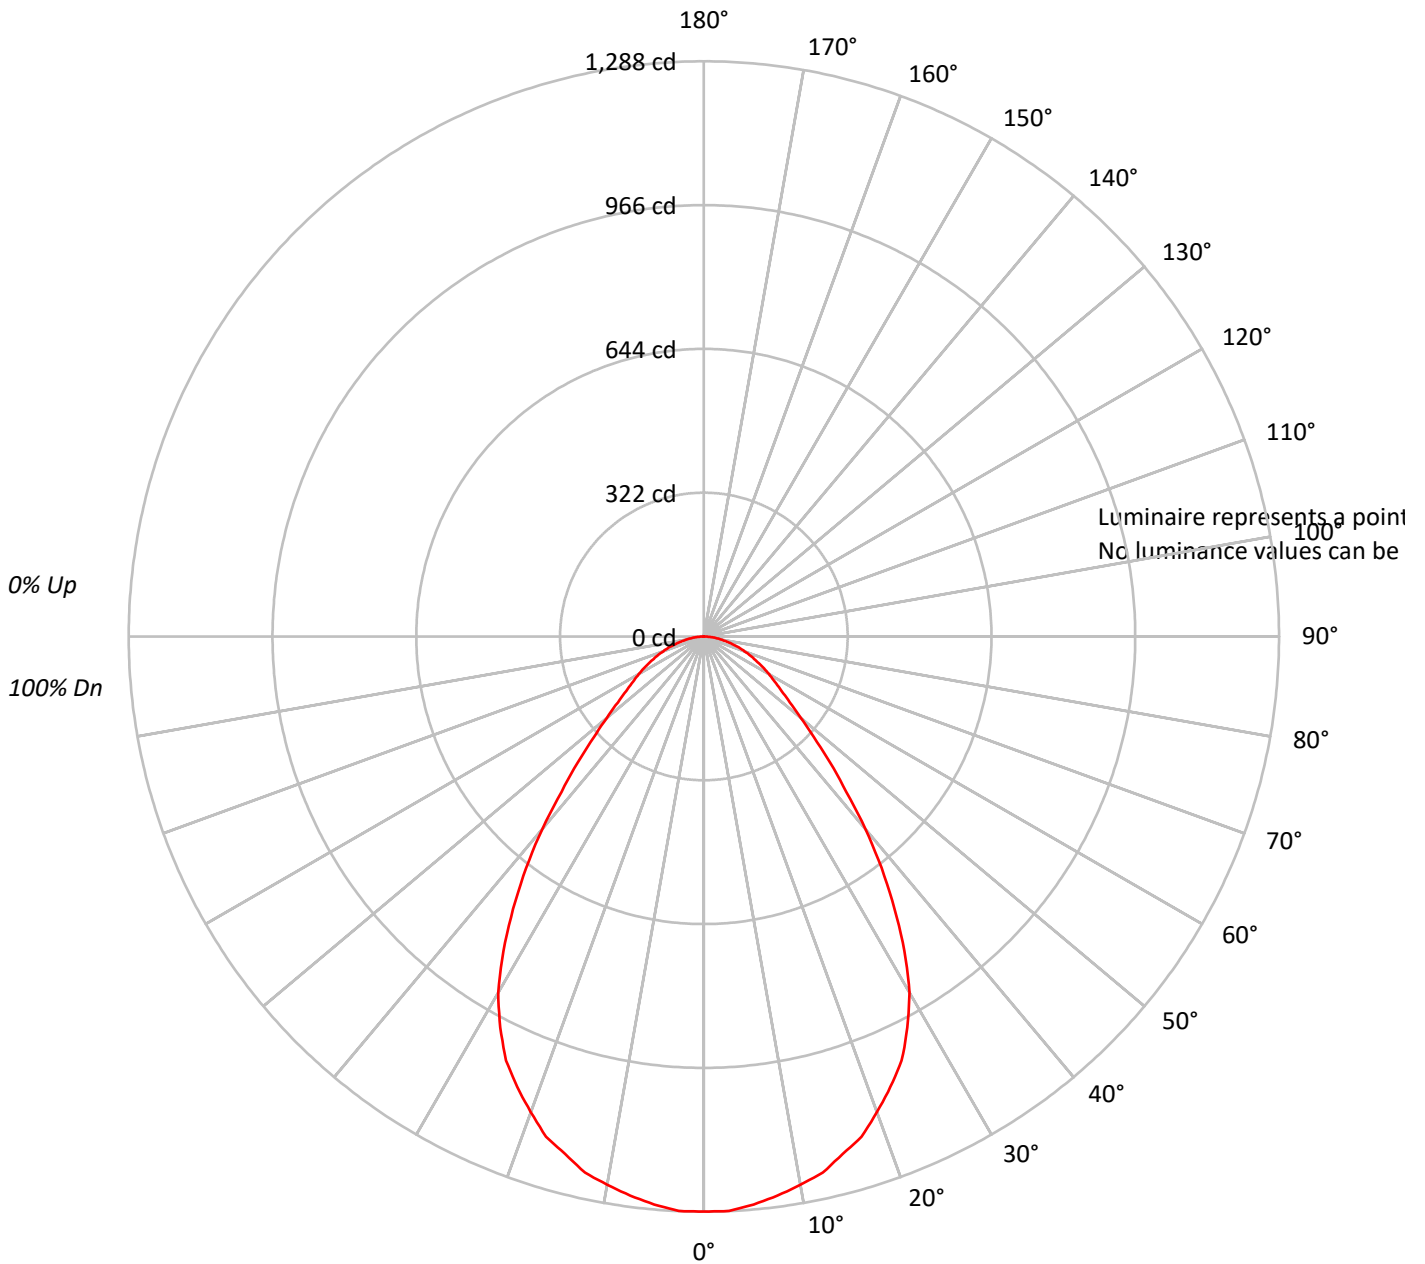



TEST NUMBER: P211728

CATALOG NUMBER: LE\_4B20D010 EC4B10208040 4LBW1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10		0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88			
2	103	96	91	86	101	94	89	85	91	87	83	88	84	81	85	82	80	78			
3	96	87	80	75	93	85	79	74	83	77	73	80	76	72	78	74	71	69			
4	89	79	72	66	87	78	71	66	75	69	65	73	68	64	71	67	63	61			
5	83	72	64	59	81	71	64	58	69	63	58	67	62	57	65	61	57	55			
6	78	66	58	53	76	65	58	53	64	57	52	62	56	52	60	55	51	50			
7	73	61	53	48	71	60	53	48	59	52	47	57	51	47	56	51	47	45			
8	68	56	49	44	67	56	49	44	54	48	43	53	47	43	52	47	43	41			
9	64	52	45	40	63	52	45	40	51	44	40	50	44	40	49	43	39	38			
10	61	49	42	37	59	48	41	37	47	41	37	46	41	37	46	40	36	35			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P211728

CATALOG NUMBER: LE\_4B20D010 EC4B10208040 4LBW1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	120.9	5.7
10°-20°	338.1	15.9
20°-30°	477.8	22.5
30°-40°	462.8	21.8
40°-50°	312.3	14.7
50°-60°	193.8	9.1
60°-70°	129.6	6.1
70°-80°	70.9	3.3
80°-90°	18.8	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	936.9	44.1
0°-40°	1399.7	65.9
0°-60°	1905.9	89.7
0°-90°	2125.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2125.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1288	
5°	1277	121
15°	1200	338
25°	1048	478
35°	744	463
45°	400	312
55°	212	194
65°	130	130
75°	66	71
85°	17	19
90°	0	



TEST NUMBER: P211728

CATALOG NUMBER: LE\_4B20D010 EC4B10208040 4LBW1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1287.7
2.5°	1287.7
5°	1276.7
7.5°	1262.9
10°	1246.4
12.5°	1229.8
15°	1199.6
17.5°	1174.7
20°	1133.3
22.5°	1091.9
25°	1047.8
27.5°	987.2
30°	921.0
32.5°	835.5
35°	744.5
37.5°	653.5
40°	562.5
42.5°	471.5
45°	399.9
47.5°	333.6
50°	284.0
52.5°	242.7
55°	212.3
57.5°	187.5
60°	168.2
62.5°	148.9
65°	129.6
67.5°	113.1
70°	96.5
72.5°	82.7
75°	66.2
77.5°	52.4
80°	38.6
82.5°	27.6
85°	16.6
87.5°	5.6
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)