

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211761

Luminaire Tested: **LE_4B20D010 EC4B10208050 4LBCS1MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P211761
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LE_4B20D010 EC4B10208050 4LBCS1MW
Description: PORTFOLIO 4 INCH CYLINDER
SHALLOW DISTRIBUTION WITH CAST MATTE WHITE TRIM
WATTAGE D010TR-21.86W DE010-20.46W D5LT-21.24W DMX-20.89W DL2-22.5W
DL3-21.8 6W DLE-22.46W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2537.9 lumens
Efficiency: N/A
Efficacy: 122.0 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P211761

CATALOG NUMBER: LE_4B20D010 EC4B10208050 4LBCS1MW

Luminous Intensity Polar Plot

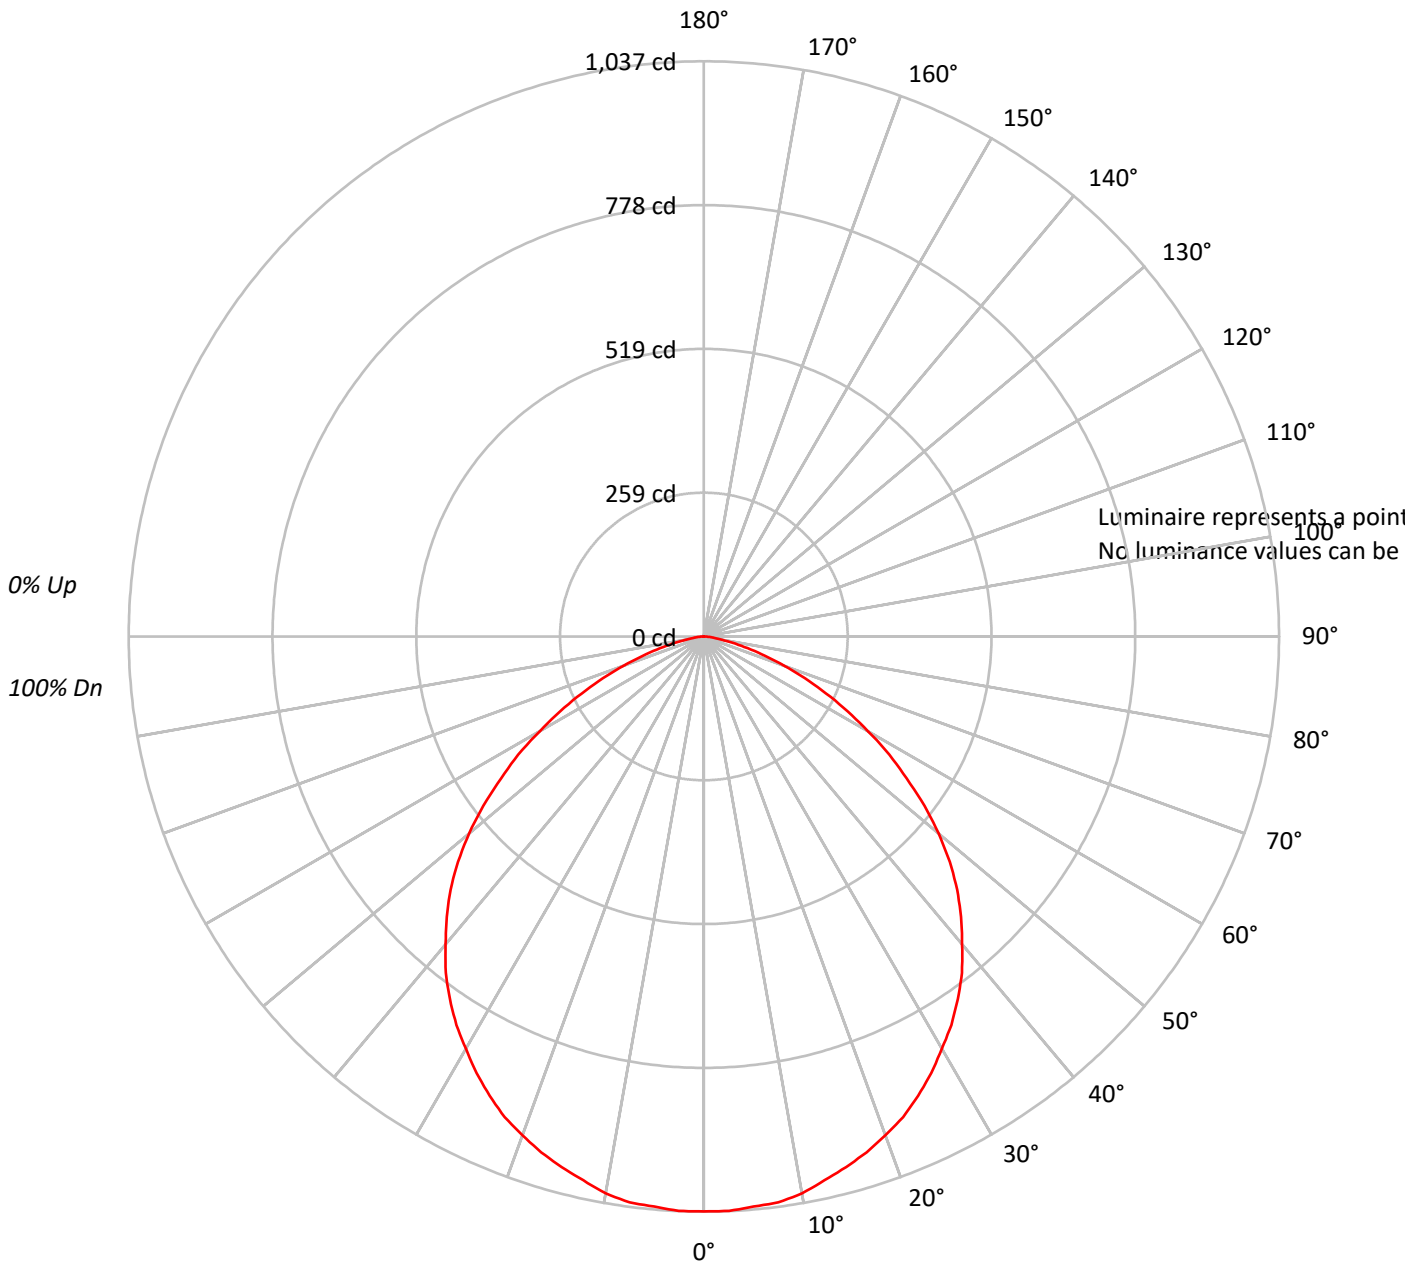



TEST NUMBER: P211761

CATALOG NUMBER: LE_4B20D010 EC4B10208050 4LBCS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87				87
2	101	94	87	82	99	92	86	81	88	84	79	85	81	78	82	79	76	74				74
3	93	83	75	70	90	81	74	69	79	73	68	76	71	67	73	69	65	63				63
4	85	74	66	60	83	73	65	59	70	64	58	68	62	58	66	61	57	55				55
5	79	66	58	52	77	65	57	51	63	56	51	61	55	50	60	54	50	48				48
6	73	60	52	45	71	59	51	45	57	50	45	56	49	44	54	49	44	42				42
7	68	55	46	40	66	54	46	40	52	45	40	51	44	40	50	44	39	37				37
8	63	50	42	36	61	49	41	36	48	41	36	47	40	36	46	40	35	33				33
9	59	46	38	33	57	45	38	32	44	37	32	43	37	32	42	36	32	30				30
10	55	42	35	30	54	42	34	30	41	34	29	40	34	29	39	33	29	27				27

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P211761

CATALOG NUMBER: LE_4B20D010 EC4B10208050 4LBCS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	98.2	3.9
10°-20°	279.6	11.0
20°-30°	420.6	16.6
30°-40°	498.4	19.6
40°-50°	496.0	19.5
50°-60°	399.9	15.8
60°-70°	241.9	9.5
70°-80°	89.8	3.5
80°-90°	13.4	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	798.4	31.5
0°-40°	1296.9	51.1
0°-60°	2192.8	86.4
0°-90°	2537.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2537.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1037	
5°	1032	98
15°	990	280
25°	914	421
35°	798	498
45°	646	496
55°	446	400
65°	243	242
75°	82	90
85°	11	13
90°	0	



TEST NUMBER: P211761

CATALOG NUMBER: LE_4B20D010 EC4B10208050 4LBCS1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	1036.6
2.5°	1036.6
5°	1031.9
7.5°	1028.9
10°	1019.6
12.5°	1004.3
15°	990.4
17.5°	975.1
20°	956.7
22.5°	938.2
25°	913.5
27.5°	887.4
30°	858.2
32.5°	830.4
35°	798.2
37.5°	764.3
40°	724.4
42.5°	685.9
45°	645.9
47.5°	601.3
50°	552.2
52.5°	501.4
55°	446.0
57.5°	396.8
60°	341.4
62.5°	292.2
65°	243.0
67.5°	196.9
70°	153.8
72.5°	115.3
75°	81.5
77.5°	52.3
80°	30.7
82.5°	18.4
85°	10.8
87.5°	4.6
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)