

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211827

Luminaire Tested: **LE\_4B30D010 EC4B30509024 4LBN1GPH**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P211827  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LE\_4B30D010 EC4B30509024 4LBN1GPH  
Description: PORTFOLIO 4 INCH CYLINDER  
NARROW DISTRIBUTION WITH GRAPHITE HAZE TRIM  
WATTAGE D010TR-27.4W DE010-27.95W D5LT-27.65W DMX-27.73W DL2-29.56W  
DL3-29.67W DLE-29.73W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1145.9 lumens  
Efficiency: N/A  
Efficacy: 40.9 lumens/watt  
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.88  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 28  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P211827

CATALOG NUMBER: LE\_4B30D010 EC4B30509024 4LBN1GPH

### Luminous Intensity Polar Plot

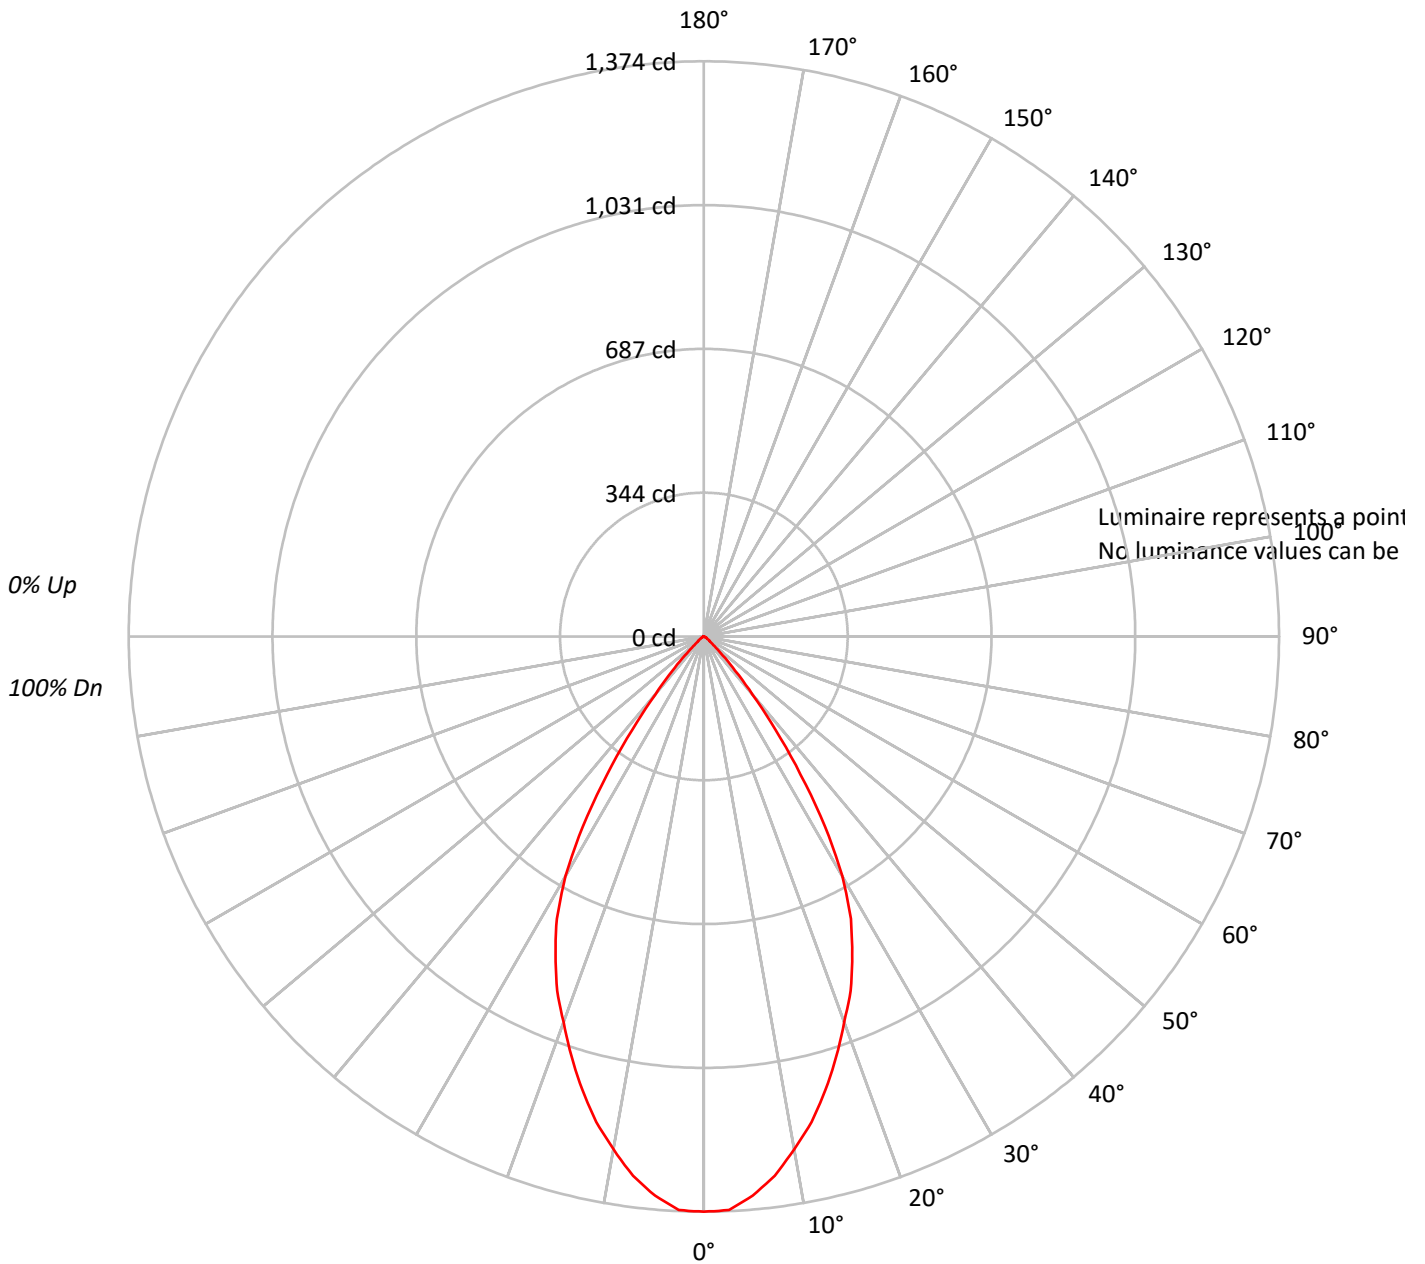



TEST NUMBER: P211827

CATALOG NUMBER: LE\_4B30D010 EC4B30509024 4LBN1GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	97	96	95	94			
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	91	89	87			
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81			
4	97	90	84	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76			
5	93	84	78	74	91	83	78	74	82	77	73	80	76	73	78	75	72	70			
6	88	79	73	69	86	78	73	69	77	72	68	75	71	68	74	70	67	66			
7	84	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	62			
8	80	70	64	60	78	70	64	60	68	63	60	67	63	59	66	62	59	58			
9	76	66	60	56	75	66	60	56	65	60	56	64	59	56	63	59	56	54			
10	72	63	57	53	71	62	57	53	61	56	53	61	56	53	60	56	52	51			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P211827

CATALOG NUMBER: LE\_4B30D010 EC4B30509024 4LBN1GPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	124.9	10.9
10°-20°	313.2	27.3
20°-30°	381.7	33.3
30°-40°	251.8	22.0
40°-50°	58.0	5.1
50°-60°	11.1	1.0
60°-70°	4.1	0.4
70°-80°	1.1	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	819.8	71.5
0°-40°	1071.6	93.5
0°-60°	1140.7	99.5
0°-90°	1145.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1145.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1374	
5°	1341	125
15°	1122	313
25°	838	382
35°	402	252
45°	64	58
55°	11	11
65°	3	4
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P211827

CATALOG NUMBER: LE\_4B30D010 EC4B30509024 4LBN1GPH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1374.1
2.5°	1371.4
5°	1340.8
7.5°	1299.2
10°	1243.6
12.5°	1188.1
15°	1121.5
17.5°	1052.1
20°	980.0
22.5°	916.1
25°	838.3
27.5°	760.6
30°	660.7
32.5°	538.6
35°	402.5
37.5°	280.4
40°	180.5
42.5°	111.0
45°	63.8
47.5°	33.3
50°	19.5
52.5°	16.7
55°	11.1
57.5°	8.4
60°	8.4
62.5°	5.6
65°	2.8
67.5°	2.8
70°	2.8
72.5°	2.8
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)