

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211836

Luminaire Tested: **LE_4B30D010 EC4B30509024 4LBS1LI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P211836
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LE_4B30D010 EC4B30509024 4LBS1LI
Description: PORTFOLIO 4 INCH CYLINDER
SHALLOW DISTRIBUTION WITH SPECULAR CLEAR TRIM
WATTAGE D010TR-27.4W DE010-27.95W D5LT-27.65W DMX-27.73W DL2-29.56W
DL3-29.67W DLE-29.73W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2505.4 lumens
Efficiency: N/A
Efficacy: 89.5 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 1
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P211836

CATALOG NUMBER: LE_4B30D010 EC4B30509024 4LBS1LI

Luminous Intensity Polar Plot

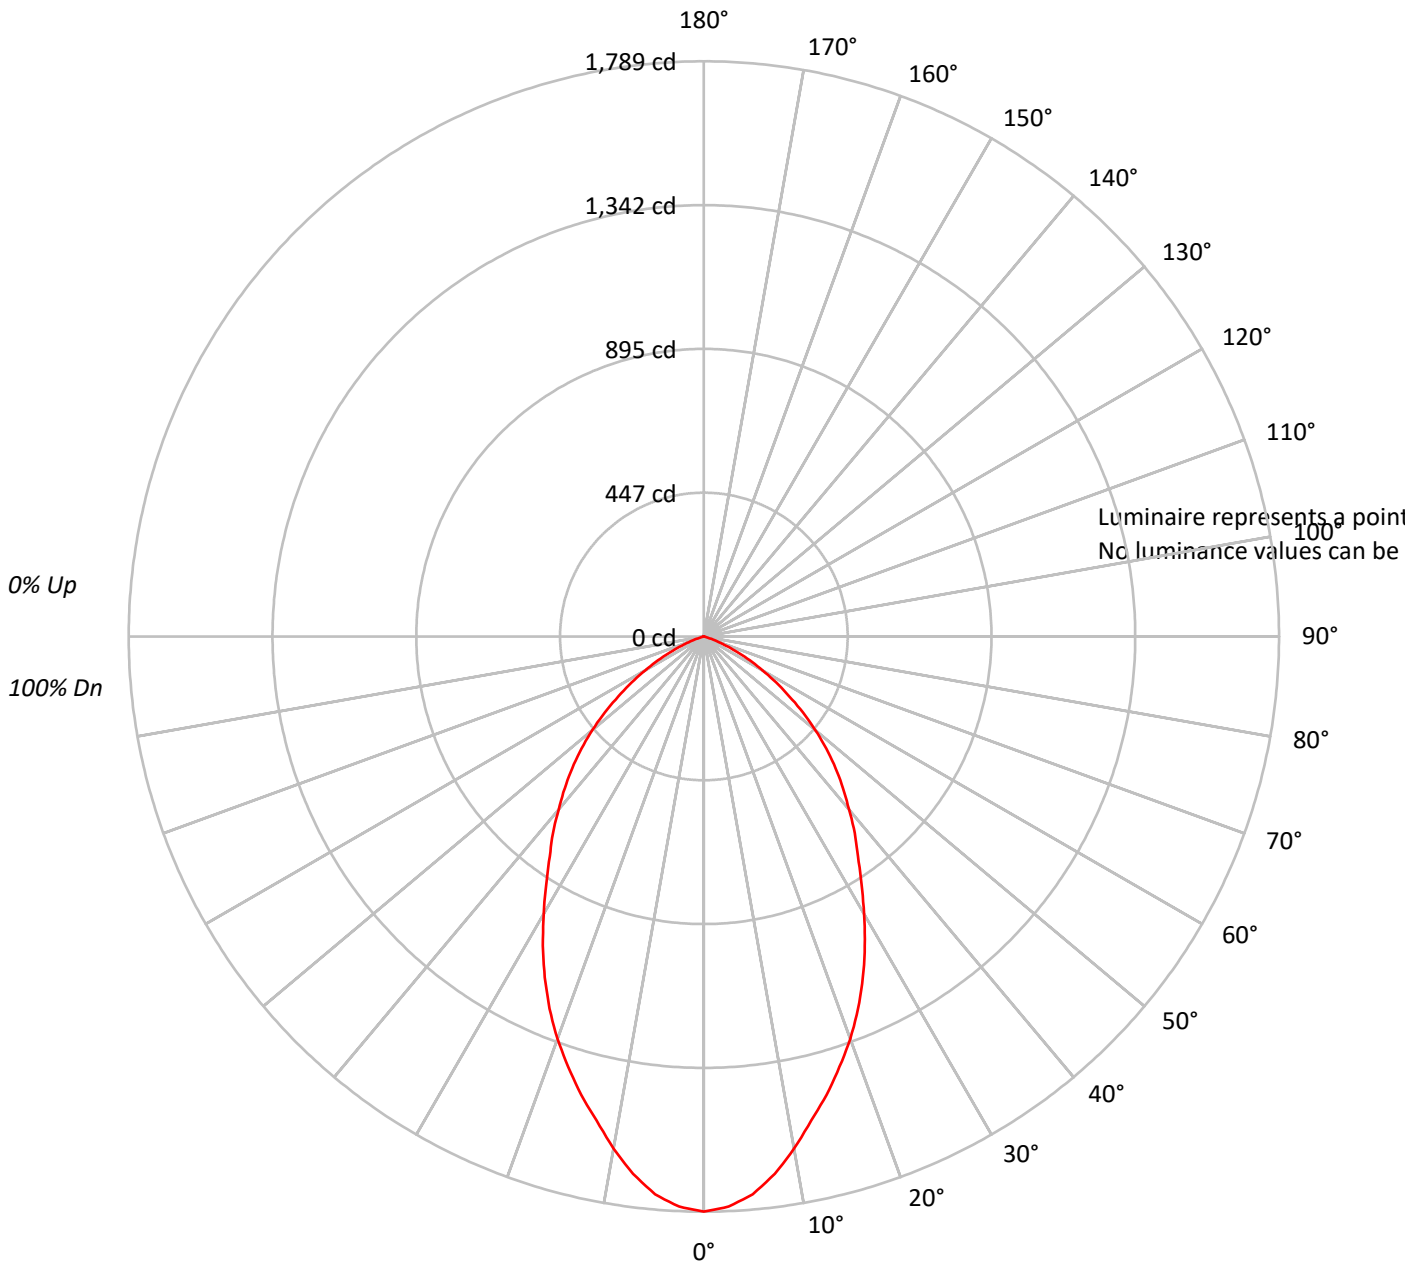



TEST NUMBER: P211836

CATALOG NUMBER: LE_4B30D010 EC4B30509024 4LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	108	105	102	109	106	103	101	102	100	98	98	96	95	95	93	92	90			
2	104	98	93	88	102	96	91	87	93	89	85	90	86	84	87	84	82	80			
3	97	89	82	77	95	87	81	77	84	79	75	82	78	74	79	76	73	71			
4	90	81	73	68	88	79	73	68	77	71	67	75	70	66	73	69	65	63			
5	84	73	66	61	82	72	65	60	70	64	60	69	63	59	67	62	59	57			
6	79	67	60	54	77	66	59	54	65	58	54	63	58	53	62	57	53	51			
7	74	62	54	49	72	61	54	49	60	53	49	58	53	48	57	52	48	46			
8	69	57	50	45	68	57	50	45	55	49	45	54	49	44	53	48	44	42			
9	65	53	46	41	64	53	46	41	52	45	41	51	45	41	50	44	41	39			
10	61	50	43	38	60	49	42	38	48	42	38	47	42	38	46	41	37	36			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P211836

CATALOG NUMBER: LE_4B30D010 EC4B30509024 4LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	162.2	6.5
10°-20°	413.7	16.5
20°-30°	536.1	21.4
30°-40°	525.3	21.0
40°-50°	445.2	17.8
50°-60°	291.8	11.6
60°-70°	117.3	4.7
70°-80°	13.4	0.5
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1112.0	44.4
0°-40°	1637.2	65.3
0°-60°	2374.3	94.8
0°-90°	2505.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2505.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1789	
5°	1742	162
15°	1476	414
25°	1170	536
35°	835	525
45°	580	445
55°	324	292
65°	114	117
75°	6	13
85°	0	0
90°	0	



TEST NUMBER: P211836

CATALOG NUMBER: LE_4B30D010 EC4B30509024 4LBS1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	1788.8
2.5°	1775.0
5°	1741.7
7.5°	1686.3
10°	1616.9
12.5°	1542.1
15°	1475.5
17.5°	1403.4
20°	1331.2
22.5°	1253.6
25°	1170.4
27.5°	1084.5
30°	995.6
32.5°	912.5
35°	834.9
37.5°	771.1
40°	701.7
42.5°	640.7
45°	579.7
47.5°	515.9
50°	452.1
52.5°	388.3
55°	324.5
57.5°	266.2
60°	210.8
62.5°	160.9
65°	113.7
67.5°	74.9
70°	44.4
72.5°	19.4
75°	5.6
77.5°	2.8
80°	2.8
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)