

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211863

Luminaire Tested: **LE_4B30D010 EC4B30508027 4LBS1GPH**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P211863
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LE_4B30D010 EC4B30508027 4LBS1GPH
Description: PORTFOLIO 4 INCH CYLINDER
SHALLOW DISTRIBUTION WITH GRAPHITE HAZE TRIM
WATTAGE D010TR-27.4W DE010-27.95W D5LT-27.65W DMX-27.73W DL2-29.56W
DL3-29.67W DLE-29.73W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2917.8 lumens
Efficiency: N/A
Efficacy: 104.2 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.26
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P211863

CATALOG NUMBER: LE_4B30D010 EC4B30508027 4LBS1GPH

Luminous Intensity Polar Plot

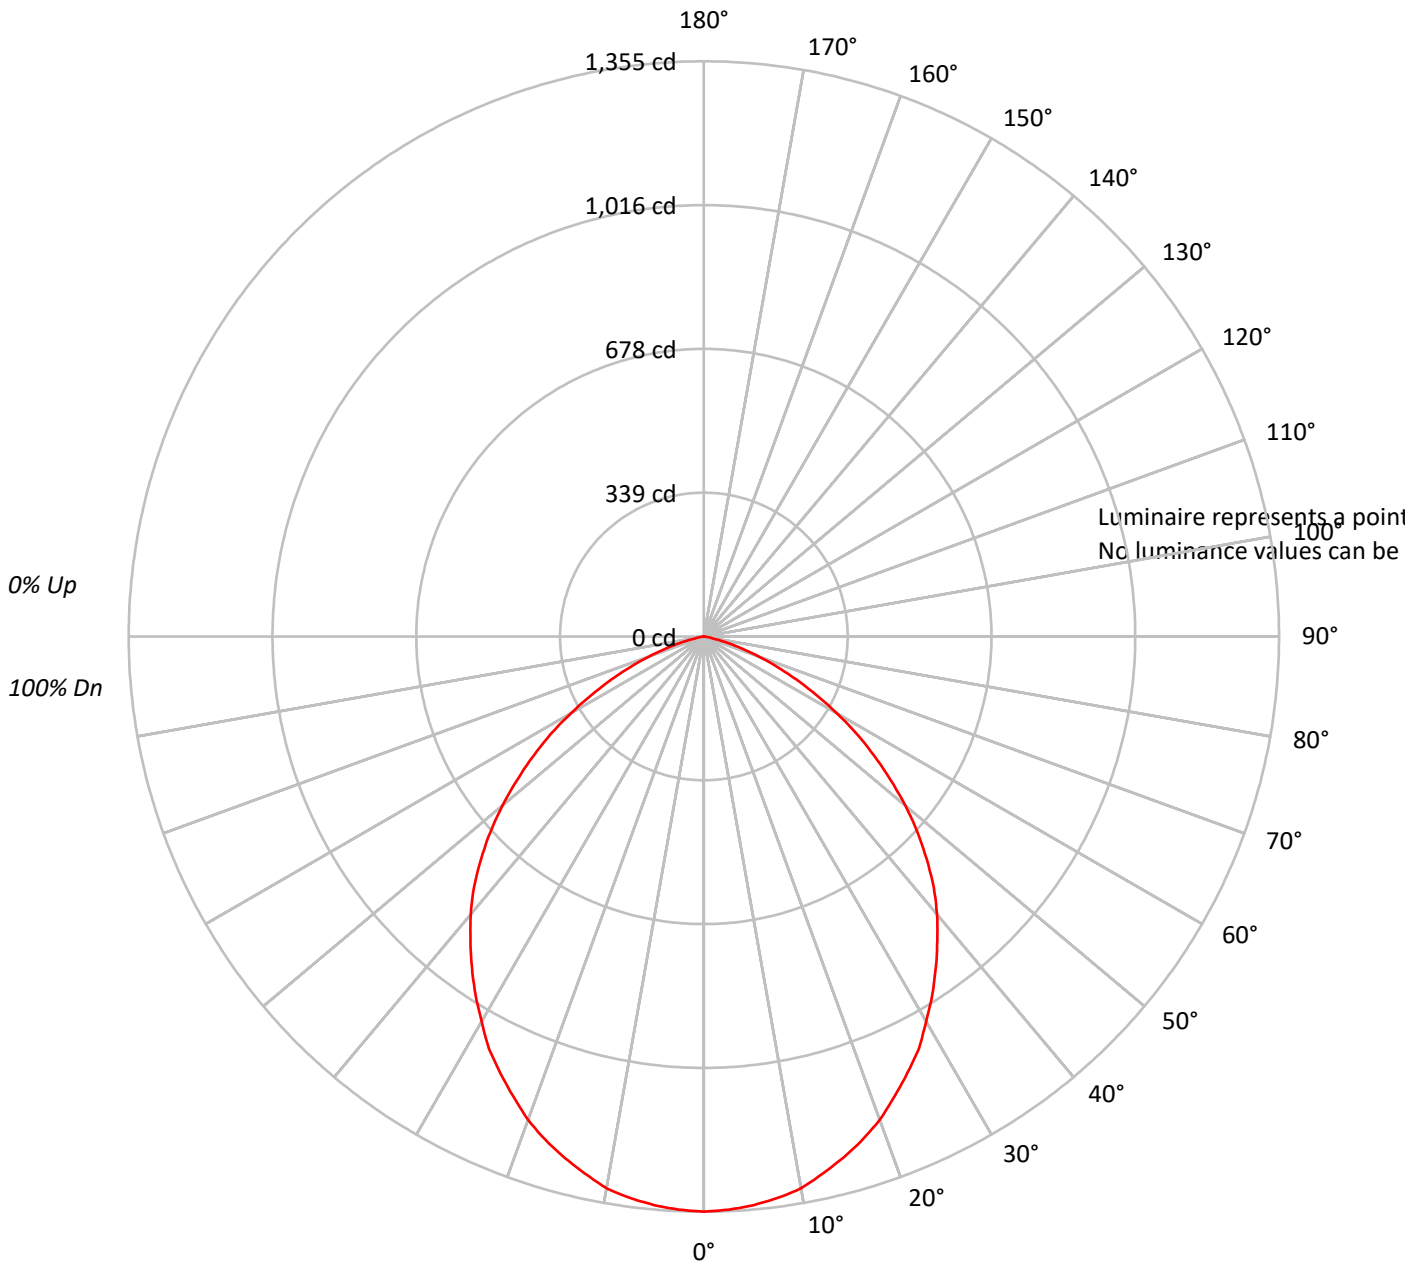



TEST NUMBER: P211863

CATALOG NUMBER: LE_4B30D010 EC4B30508027 4LBS1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	111	107	103	100	108	105	102	99	101	98	96	97	95	93	93	91	90	88				88
2	102	95	89	84	100	93	88	83	90	85	82	87	83	80	84	81	78	76				76
3	94	85	78	72	92	83	77	71	80	75	70	78	73	69	75	71	68	66				66
4	87	76	68	62	85	75	67	62	72	66	61	70	65	60	68	63	59	57				57
5	80	68	60	54	78	67	60	54	65	59	53	63	58	53	62	56	52	50				50
6	74	62	54	48	73	61	53	48	59	52	47	58	52	47	56	51	47	45				45
7	69	57	48	43	68	56	48	43	54	47	42	53	47	42	52	46	42	40				40
8	65	52	44	38	63	51	44	38	50	43	38	49	42	38	48	42	38	36				36
9	60	48	40	35	59	47	40	35	46	39	35	45	39	34	44	38	34	32				32
10	57	44	37	32	56	44	36	32	43	36	31	42	36	31	41	35	31	30				30

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P211863

CATALOG NUMBER: LE_4B30D010 EC4B30508027 4LBS1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	127.6	4.4
10°-20°	358.2	12.3
20°-30°	522.4	17.9
30°-40°	595.7	20.4
40°-50°	571.4	19.6
50°-60°	437.6	15.0
60°-70°	240.1	8.2
70°-80°	63.9	2.2
80°-90°	0.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1008.1	34.6
0°-40°	1603.8	55.0
0°-60°	2612.8	89.5
0°-90°	2917.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2917.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1355	
5°	1345	128
15°	1271	358
25°	1135	522
35°	952	596
45°	742	571
55°	490	438
65°	242	240
75°	56	64
85°	0	1
90°	0	



TEST NUMBER: P211863

CATALOG NUMBER: LE_4B30D010 EC4B30508027 4LBS1GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1355.1
2.5°	1351.6
5°	1344.7
7.5°	1334.1
10°	1320.2
12.5°	1295.6
15°	1271.1
17.5°	1243.1
20°	1211.6
22.5°	1173.1
25°	1134.6
27.5°	1096.1
30°	1047.0
32.5°	1001.5
35°	952.5
37.5°	903.4
40°	854.5
42.5°	801.9
45°	742.4
47.5°	682.8
50°	619.8
52.5°	553.3
55°	490.2
57.5°	427.2
60°	360.6
62.5°	297.7
65°	241.6
67.5°	185.6
70°	136.5
72.5°	91.1
75°	56.0
77.5°	24.5
80°	7.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)