

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211911

Luminaire Tested: **LE_4B30D010 EC4B30509727 4LBM1MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P211911
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LE_4B30D010 EC4B30509727 4LBM1MW
Description: PORTFOLIO 4 INCH CYLINDER
MEDIUM DISTRIBUTION WITH MATTE WHITE TRIM
WATTAGE D010TR-27.4W DE010-27.95W D5LT-27.65W DMX-27.73W DL2-29.56W
DL3-29.67W DLE-29.73W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1892.0 lumens
Efficiency: N/A
Efficacy: 67.6 lumens/watt
Spacing Criteria (0/90/45): 0.99 / 0.99 / 0.97
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P211911

CATALOG NUMBER: LE_4B30D010 EC4B30509727 4LBM1MW

Luminous Intensity Polar Plot

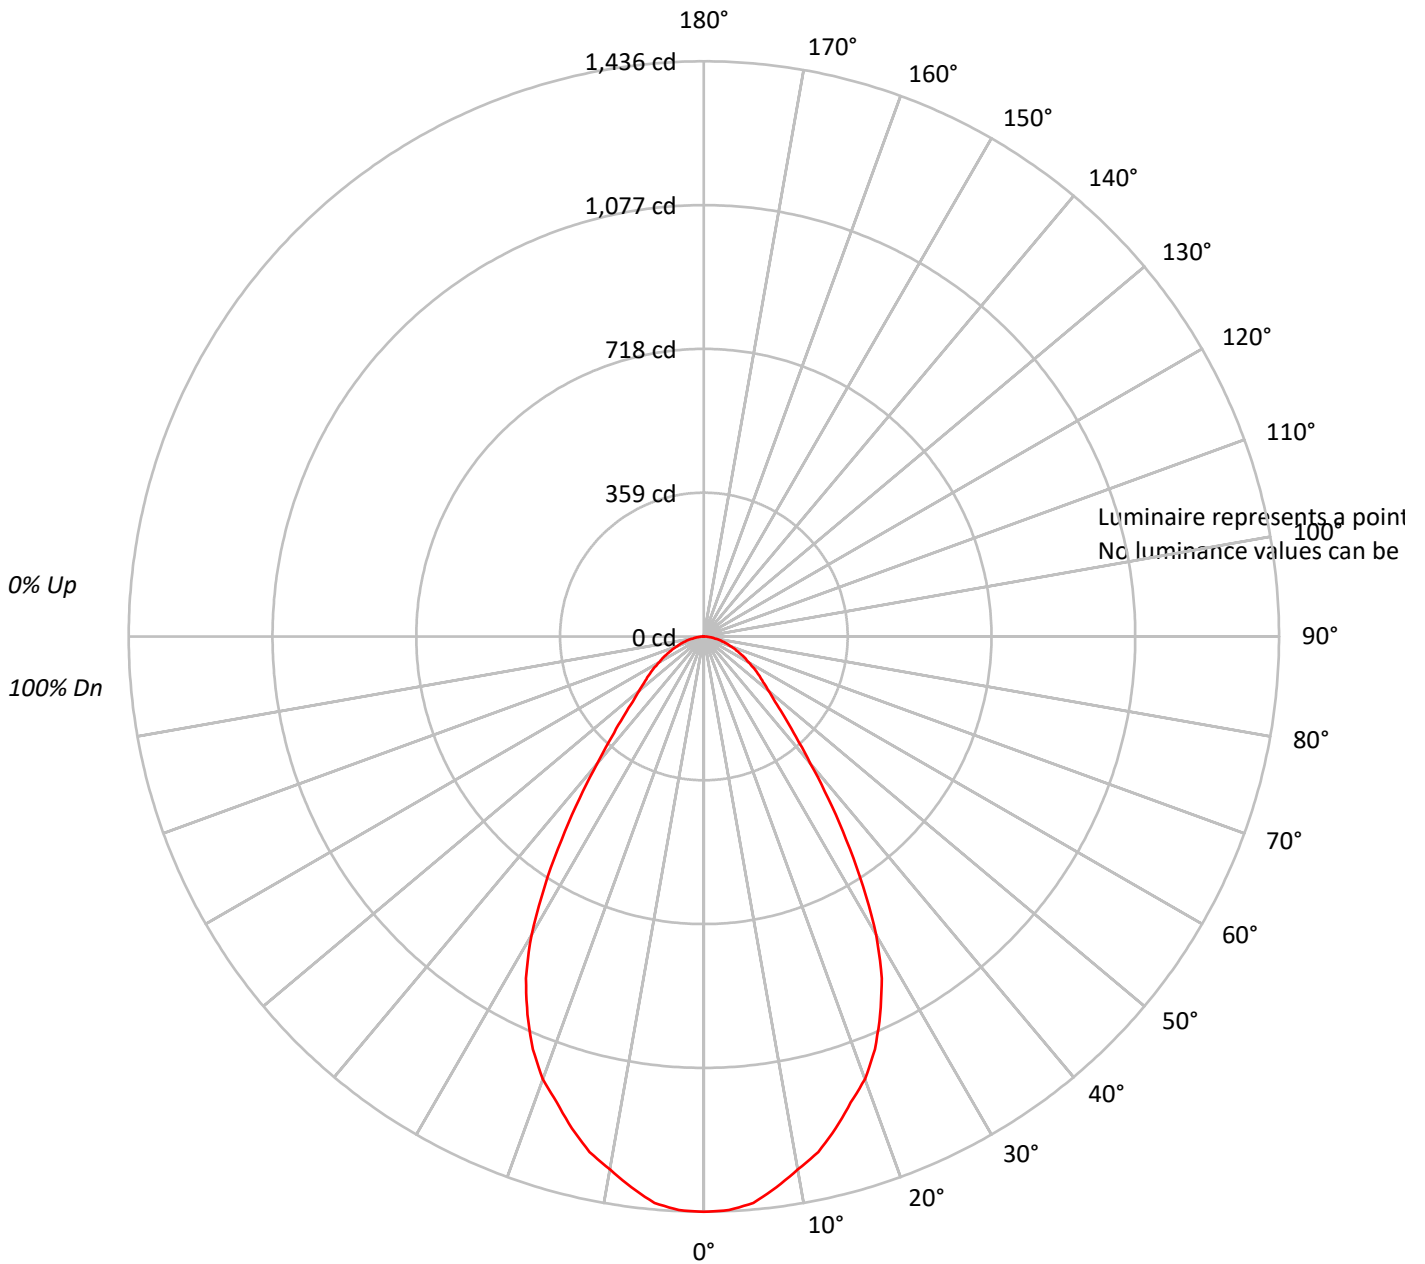



TEST NUMBER: P211911

CATALOG NUMBER: LE_4B30D010 EC4B30509727 4LBM1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	89				89
2	104	98	92	88	102	96	91	87	93	89	85	89	86	83	87	84	81	80				80
3	97	89	83	77	95	87	82	77	85	80	76	82	78	74	80	76	73	71				71
4	91	81	74	69	89	80	74	69	78	72	68	76	71	67	74	69	66	64				64
5	85	75	67	62	83	74	67	62	72	66	61	70	65	61	68	64	60	58				58
6	80	69	62	56	78	68	61	56	66	60	56	65	59	55	63	59	55	53				53
7	75	64	57	52	74	63	56	51	62	56	51	60	55	51	59	54	50	49				49
8	71	59	52	47	69	59	52	47	58	51	47	56	51	47	55	50	47	45				45
9	67	55	48	44	66	55	48	44	54	48	44	53	47	43	52	47	43	42				42
10	63	52	45	41	62	51	45	41	51	45	40	50	44	40	49	44	40	39				39

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P211911

CATALOG NUMBER: LE_4B30D010 EC4B30509727 4LBM1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	133.1	7.0
10°-20°	356.9	18.9
20°-30°	474.6	25.1
30°-40°	388.1	20.5
40°-50°	226.1	11.9
50°-60°	149.9	7.9
60°-70°	98.6	5.2
70°-80°	52.0	2.7
80°-90°	12.7	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	964.6	51.0
0°-40°	1352.7	71.5
0°-60°	1728.7	91.4
0°-90°	1892.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1892.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1436	
5°	1420	133
15°	1272	357
25°	1042	475
35°	619	388
45°	285	226
55°	167	150
65°	99	99
75°	49	52
85°	11	13
90°	0	



TEST NUMBER: P211911

CATALOG NUMBER: LE_4B30D010 EC4B30509727 4LBM1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	1436.3
2.5°	1433.5
5°	1419.8
7.5°	1386.9
10°	1351.3
12.5°	1318.5
15°	1271.8
17.5°	1219.7
20°	1175.9
22.5°	1115.6
25°	1041.6
27.5°	962.1
30°	860.7
32.5°	740.1
35°	619.4
37.5°	509.8
40°	413.9
42.5°	339.9
45°	285.0
47.5°	241.2
50°	211.0
52.5°	186.4
55°	167.2
57.5°	148.0
60°	128.9
62.5°	115.1
65°	98.7
67.5°	84.9
70°	71.2
72.5°	60.3
75°	49.3
77.5°	38.4
80°	27.4
82.5°	19.1
85°	11.0
87.5°	2.8
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)