

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P212027

Luminaire Tested: **LE_4B30D010 EC4B30508035 4LBM1MW**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P212027
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LE_4B30D010 EC4B30508035 4LBM1MW
Description: PORTFOLIO 4 INCH CYLINDER
MEDIUM DISTRIBUTION WITH MATTE WHITE TRIM
WATTAGE D010TR-27.4W DE010-27.95W D5LT-27.65W DMX-27.73W DL2-29.56W
DL3-29.67W DLE-29.73W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2714.9 lumens
Efficiency: N/A
Efficacy: 97.0 lumens/watt
Spacing Criteria (0/90/45): 0.99 / 0.99 / 0.97
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P212027

CATALOG NUMBER: LE_4B30D010 EC4B30508035 4LBM1MW

Luminous Intensity Polar Plot

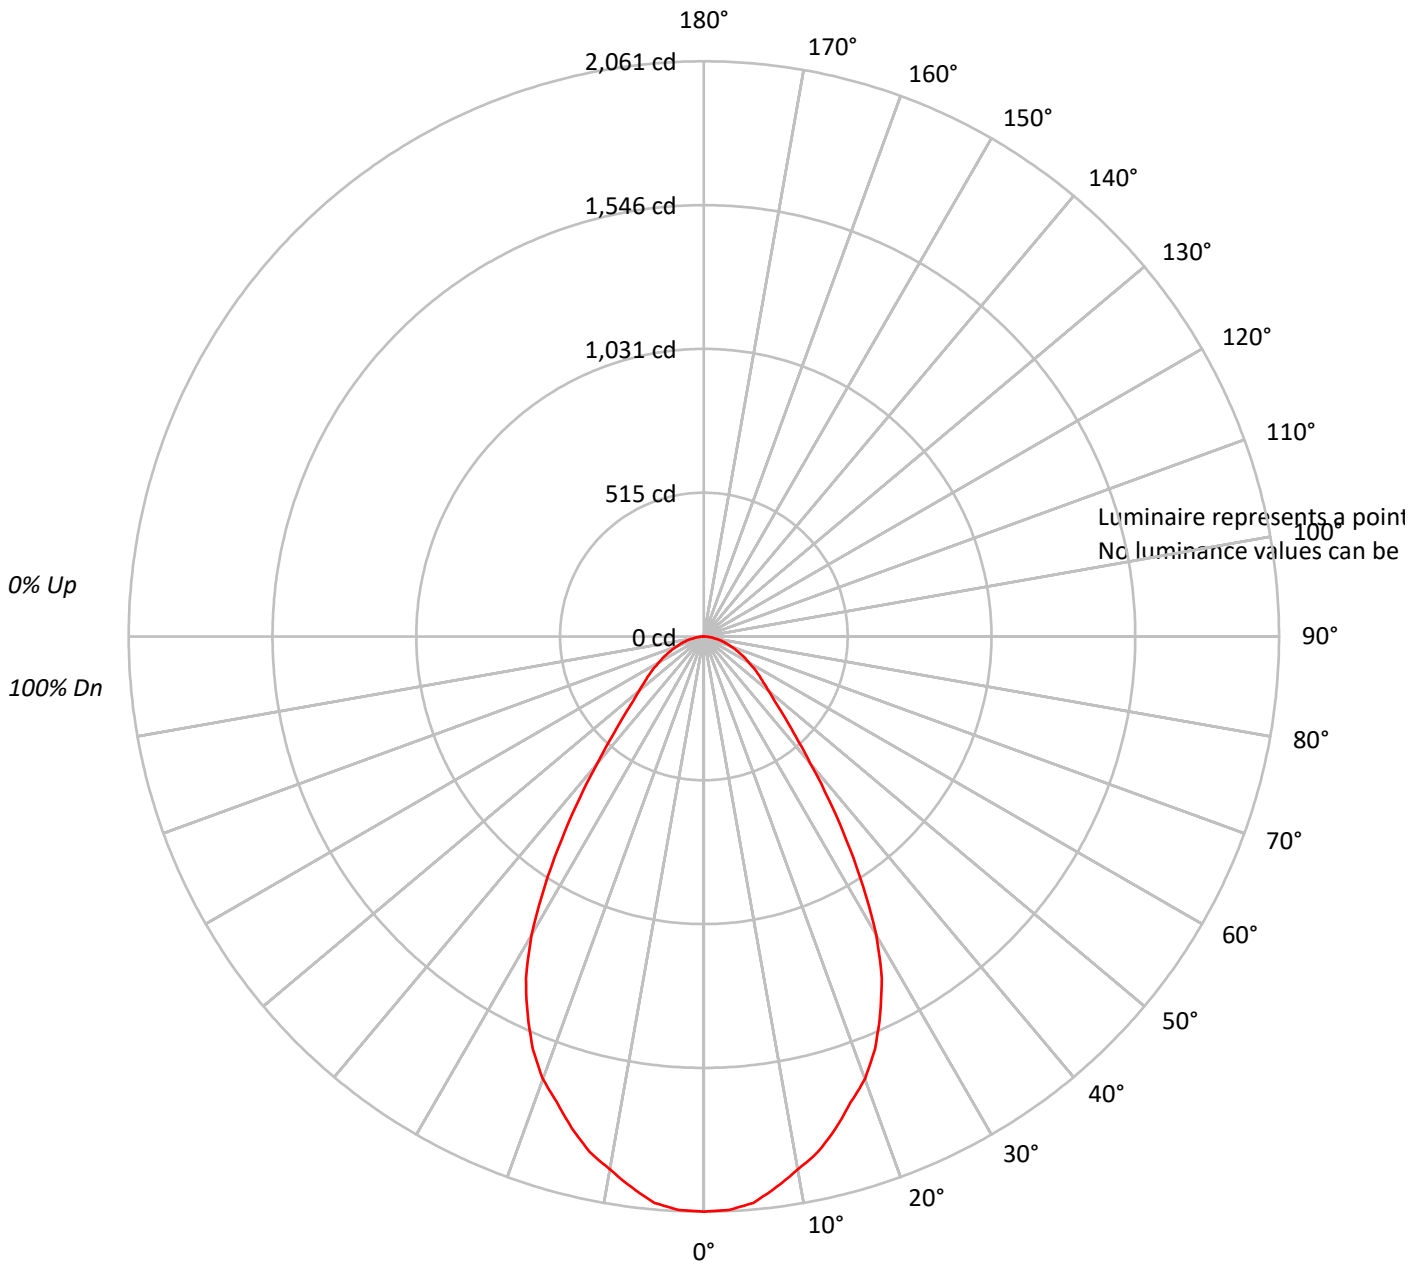



TEST NUMBER: P212027

CATALOG NUMBER: LE_4B30D010 EC4B30508035 4LBM1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	91	89			
2	104	98	92	88	102	96	91	87	93	89	85	89	86	83	87	84	81	80			
3	97	89	83	77	95	87	82	77	85	80	76	82	78	74	80	76	73	71			
4	91	81	74	69	89	80	74	69	78	72	68	76	71	67	74	69	66	64			
5	85	75	67	62	83	74	67	62	72	66	61	70	65	61	68	64	60	58			
6	80	69	62	56	78	68	61	56	66	60	56	65	59	55	63	59	55	53			
7	75	64	57	52	74	63	56	51	62	56	51	60	55	51	59	54	50	49			
8	71	59	52	47	69	59	52	47	58	51	47	56	51	47	55	50	47	45			
9	67	55	48	44	66	55	48	44	54	48	44	53	47	43	52	47	43	42			
10	63	52	45	41	62	51	45	41	51	45	40	50	44	40	49	44	40	39			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P212027

CATALOG NUMBER: LE_4B30D010 EC4B30508035 4LBM1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	191.0	7.0
10°-20°	512.1	18.9
20°-30°	680.9	25.1
30°-40°	556.9	20.5
40°-50°	324.4	11.9
50°-60°	215.2	7.9
60°-70°	141.5	5.2
70°-80°	74.7	2.7
80°-90°	18.2	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1384.1	51.0
0°-40°	1941.0	71.5
0°-60°	2480.6	91.4
0°-90°	2714.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2714.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2061	
5°	2037	191
15°	1825	512
25°	1494	681
35°	889	557
45°	409	324
55°	240	215
65°	142	141
75°	71	75
85°	16	18
90°	0	



TEST NUMBER: P212027

CATALOG NUMBER: LE_4B30D010 EC4B30508035 4LBM1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	2061.0
2.5°	2057.0
5°	2037.3
7.5°	1990.1
10°	1939.1
12.5°	1891.8
15°	1824.9
17.5°	1750.2
20°	1687.3
22.5°	1600.8
25°	1494.5
27.5°	1380.5
30°	1234.9
32.5°	1062.0
35°	888.9
37.5°	731.5
40°	593.9
42.5°	487.7
45°	409.0
47.5°	346.1
50°	302.9
52.5°	267.5
55°	239.9
57.5°	212.4
60°	184.9
62.5°	165.2
65°	141.6
67.5°	121.9
70°	102.3
72.5°	86.5
75°	70.8
77.5°	55.1
80°	39.3
82.5°	27.5
85°	15.8
87.5°	3.9
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)