

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P212078

Luminaire Tested: **LE\_4B30D010 EC4B30508040 4LBCSM1B**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P212078  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LE\_4B30D010 EC4B30508040 4LBCSM1B  
Description: PORTFOLIO 4 INCH CYLINDER  
SHALLOW DISTRIBUTION WITH CAST MATTE METALLIC SILVER TRIM  
WATTAGE D010TR-27.4W DE010-27.95W D5LT-27.65W DMX-27.73W DL2-29.56W  
DL3-29.67W DLE-29.73W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3426.2 lumens  
Efficiency: N/A  
Efficacy: 122.4 lumens/watt  
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 28  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P212078

CATALOG NUMBER: LE\_4B30D010 EC4B30508040 4LBCSM1B

### Luminous Intensity Polar Plot

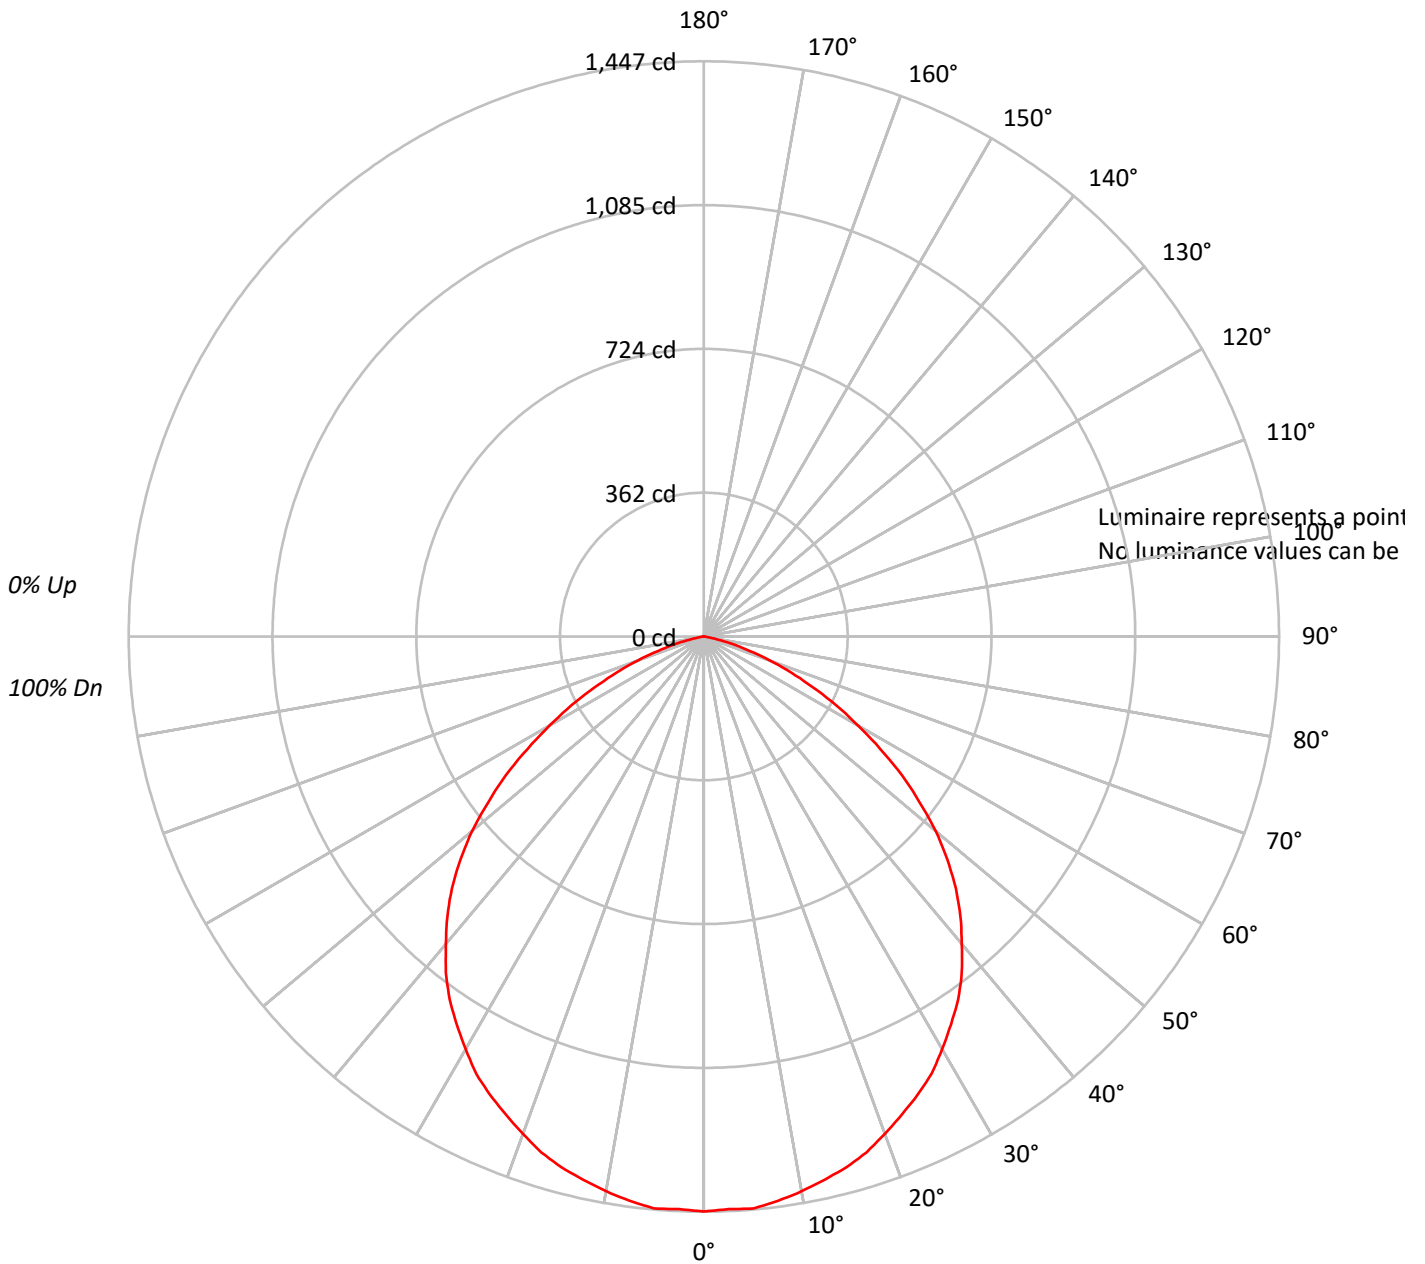



TEST NUMBER: P212078

CATALOG NUMBER: LE\_4B30D010 EC4B30508040 4LBCSM1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	111	107	103	100	108	104	101	98	100	98	95	96	94	92	93	91	90	88			88
2	102	95	89	84	99	93	87	83	89	85	81	86	82	79	83	80	77	75			75
3	93	84	77	71	91	83	76	70	80	74	69	77	72	68	74	70	67	65			65
4	86	75	67	61	84	74	66	61	71	65	60	69	63	59	67	62	58	56			56
5	79	67	59	53	77	66	59	53	64	57	52	62	56	52	61	55	51	49			49
6	74	61	53	47	72	60	52	46	58	51	46	57	50	46	55	50	45	43			43
7	68	55	47	41	67	55	47	41	53	46	41	52	45	41	50	45	40	39			39
8	64	51	43	37	62	50	42	37	49	42	37	48	41	37	46	41	36	35			35
9	60	47	39	33	58	46	39	33	45	38	33	44	38	33	43	37	33	31			31
10	56	43	35	30	55	43	35	30	42	35	30	41	34	30	40	34	30	28			28

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P212078

CATALOG NUMBER: LE\_4B30D010 EC4B30508040 4LBCSM1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	136.8	4.0
10°-20°	389.8	11.4
20°-30°	586.0	17.1
30°-40°	695.3	20.3
40°-50°	688.1	20.1
50°-60°	540.5	15.8
60°-70°	303.1	8.8
70°-80°	85.1	2.5
80°-90°	1.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1112.7	32.5
0°-40°	1808.0	52.8
0°-60°	3036.6	88.6
0°-90°	3426.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3426.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1447	
5°	1444	137
15°	1383	390
25°	1272	586
35°	1115	695
45°	897	688
55°	609	540
65°	302	303
75°	74	85
85°	0	1
90°	0	



TEST NUMBER: P212078

CATALOG NUMBER: LE\_4B30D010 EC4B30508040 4LBCSM1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1446.6
2.5°	1441.8
5°	1444.2
7.5°	1431.9
10°	1417.2
12.5°	1400.0
15°	1382.8
17.5°	1360.7
20°	1331.2
22.5°	1301.8
25°	1272.3
27.5°	1240.4
30°	1198.6
32.5°	1156.9
35°	1115.1
37.5°	1066.0
40°	1009.5
42.5°	955.5
45°	896.6
47.5°	830.2
50°	761.4
52.5°	682.8
55°	609.1
57.5°	525.6
60°	447.1
62.5°	375.8
65°	302.1
67.5°	238.3
70°	176.9
72.5°	120.4
75°	73.7
77.5°	36.9
80°	9.9
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)