

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P212149

Luminaire Tested: **LE\_4B30D010 EC4B30508050 4LBN1MW**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P212149  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LE\_4B30D010 EC4B30508050 4LBN1MW  
Description: PORTFOLIO 4 INCH CYLINDER  
NARROW DISTRIBUTION WITH MATTE WHITE TRIM  
WATTAGE D010TR-27.4W DE010-27.95W D5LT-27.65W DMX-27.73W DL2-29.56W  
DL3-29.67W DLE-29.73W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2500.1 lumens  
Efficiency: N/A  
Efficacy: 89.3 lumens/watt  
Spacing Criteria (0/90/45): 0.96 / 0.96 / 0.95  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 28  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P212149

CATALOG NUMBER: LE\_4B30D010 EC4B30508050 4LBN1MW

### Luminous Intensity Polar Plot

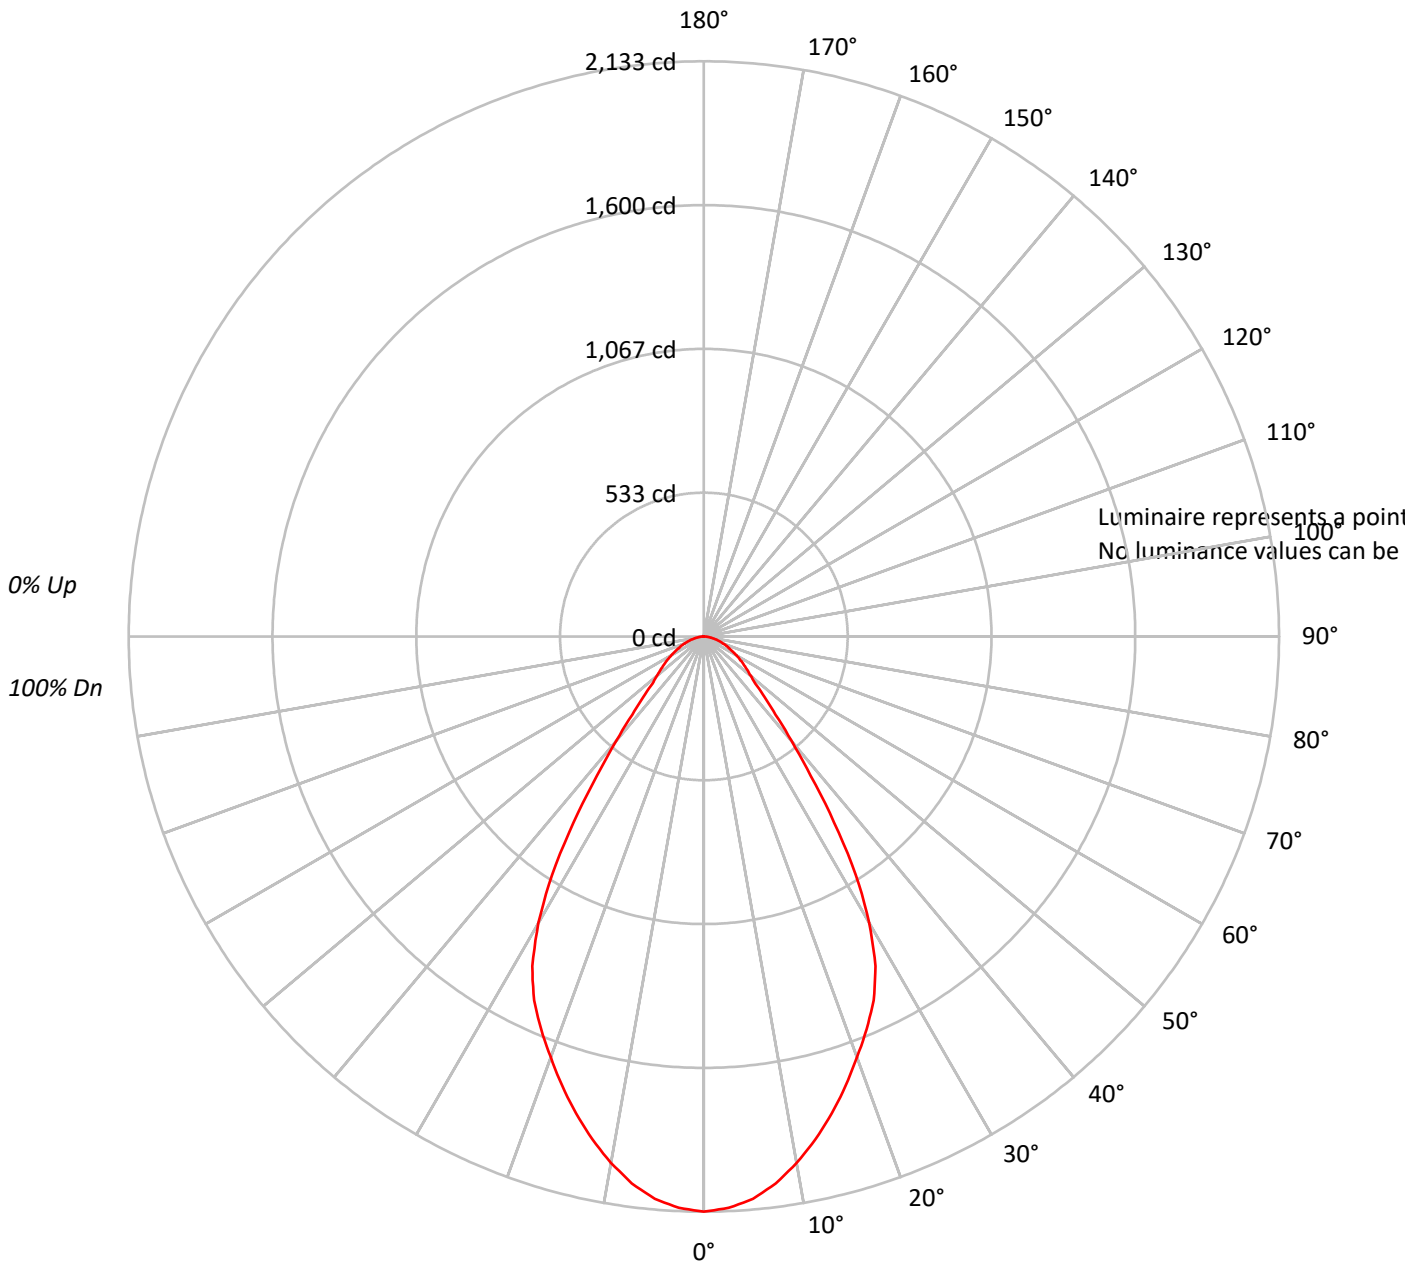



TEST NUMBER: P212149

CATALOG NUMBER: LE\_4B30D010 EC4B30508050 4LBN1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	105	103	109	106	104	101	102	100	98	98	97	95	95	94	92	90			
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81			
3	98	90	84	80	96	89	83	79	86	82	78	84	80	76	81	78	75	73			
4	92	83	76	71	90	82	76	71	80	74	70	78	73	69	76	72	68	67			
5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	63	61			
6	82	71	64	59	80	70	64	59	69	63	58	67	62	58	66	61	58	56			
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	62	57	53	52			
8	73	62	55	50	71	61	55	50	60	54	50	59	53	49	58	53	49	48			
9	69	58	51	46	68	57	51	46	56	50	46	55	50	46	54	49	46	44			
10	65	54	48	43	64	54	47	43	53	47	43	52	47	43	51	46	43	41			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P212149

CATALOG NUMBER: LE\_4B30D010 EC4B30508050 4LBN1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	196.2	7.8
10°-20°	513.4	20.5
20°-30°	675.7	27.0
30°-40°	526.0	21.0
40°-50°	255.5	10.2
50°-60°	161.4	6.5
60°-70°	104.1	4.2
70°-80°	54.4	2.2
80°-90°	13.5	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1385.3	55.4
0°-40°	1911.3	76.4
0°-60°	2328.1	93.1
0°-90°	2500.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2500.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2133	
5°	2093	196
15°	1831	513
25°	1489	676
35°	842	526
45°	318	255
55°	179	161
65°	103	104
75°	52	54
85°	12	13
90°	0	



TEST NUMBER: P212149

CATALOG NUMBER: LE\_4B30D010 EC4B30508050 4LBN1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2132.9
2.5°	2120.9
5°	2093.1
7.5°	2045.5
10°	1982.0
12.5°	1910.4
15°	1831.1
17.5°	1747.7
20°	1660.2
22.5°	1576.8
25°	1489.4
27.5°	1378.2
30°	1227.3
32.5°	1048.5
35°	842.0
37.5°	651.3
40°	504.4
42.5°	393.2
45°	317.7
47.5°	258.2
50°	226.4
52.5°	202.5
55°	178.8
57.5°	158.9
60°	139.0
62.5°	119.1
65°	103.2
67.5°	91.4
70°	75.5
72.5°	63.6
75°	51.6
77.5°	39.7
80°	27.8
82.5°	19.8
85°	11.9
87.5°	3.9
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)