

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P212155

Luminaire Tested: **LE_4B30D010 EC4B30508050 4LBS1LI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P212155
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LE_4B30D010 EC4B30508050 4LBS1LI
Description: PORTFOLIO 4 INCH CYLINDER
SHALLOW DISTRIBUTION WITH SPECULAR CLEAR TRIM
WATTAGE D010TR-27.4W DE010-27.95W D5LT-27.65W DMX-27.73W DL2-29.56W
DL3-29.67W DLE-29.73W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3589.3 lumens
Efficiency: N/A
Efficacy: 128.2 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 1
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P212155

CATALOG NUMBER: LE_4B30D010 EC4B30508050 4LBS1LI

Luminous Intensity Polar Plot

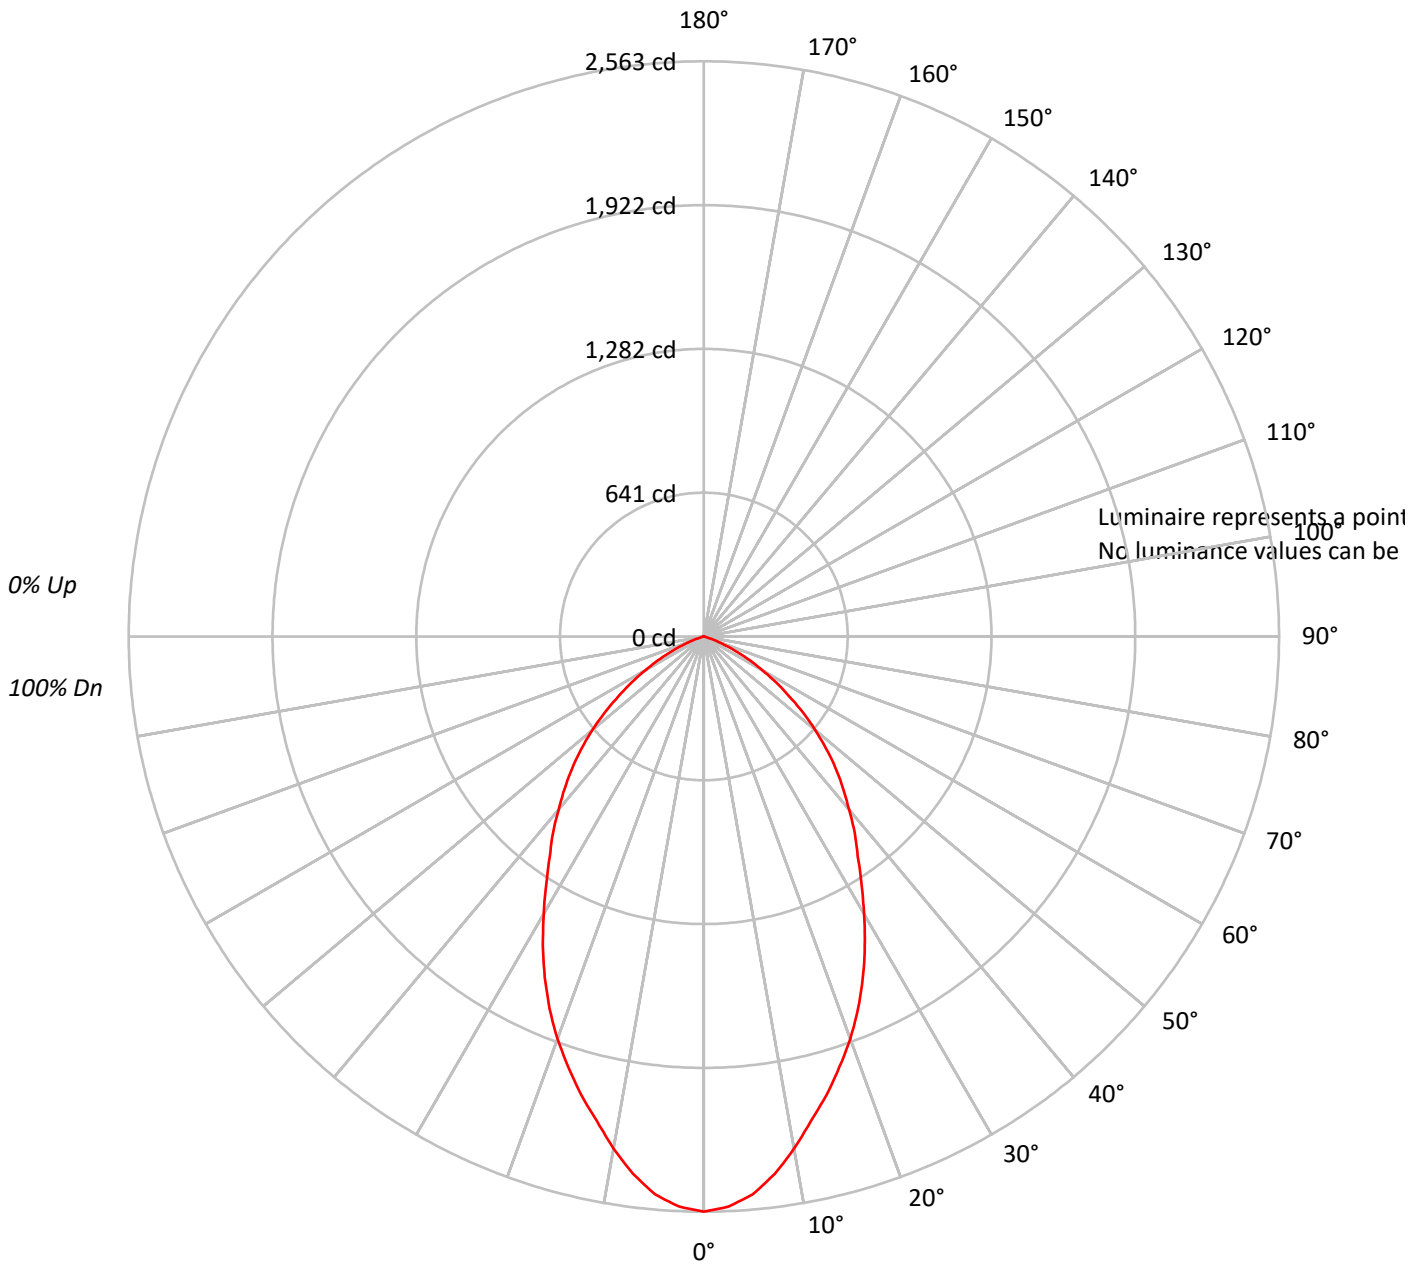



TEST NUMBER: P212155

CATALOG NUMBER: LE_4B30D010 EC4B30508050 4LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	108	105	102	109	106	103	101	102	100	98	98	96	95	95	93	92	90			
2	104	98	93	88	102	96	91	87	93	89	85	90	86	84	87	84	82	80			
3	97	89	82	77	95	87	81	77	84	79	75	82	78	74	79	76	73	71			
4	90	81	73	68	88	79	73	68	77	71	67	75	70	66	73	69	65	63			
5	84	73	66	61	82	72	65	60	70	64	60	69	63	59	67	62	59	57			
6	79	67	60	54	77	66	59	54	65	58	54	63	58	53	62	57	53	51			
7	74	62	54	49	72	61	54	49	60	53	49	58	53	48	57	52	48	46			
8	69	57	50	45	68	57	50	45	55	49	45	54	49	44	53	48	44	42			
9	65	53	46	41	64	53	46	41	52	45	41	51	45	41	50	44	41	39			
10	61	50	43	38	60	49	42	38	48	42	38	47	42	38	46	41	37	36			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P212155

CATALOG NUMBER: LE_4B30D010 EC4B30508050 4LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	232.4	6.5
10°-20°	592.7	16.5
20°-30°	768.0	21.4
30°-40°	752.5	21.0
40°-50°	637.8	17.8
50°-60°	418.1	11.6
60°-70°	168.1	4.7
70°-80°	19.2	0.5
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1593.0	44.4
0°-40°	2345.6	65.3
0°-60°	3401.5	94.8
0°-90°	3589.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3589.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2563	
5°	2495	232
15°	2114	593
25°	1677	768
35°	1196	753
45°	830	638
55°	465	418
65°	163	168
75°	8	19
85°	0	1
90°	0	



TEST NUMBER: P212155

CATALOG NUMBER: LE_4B30D010 EC4B30508050 4LBS1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	2562.9
2.5°	2543.0
5°	2495.3
7.5°	2415.8
10°	2316.5
12.5°	2209.2
15°	2113.9
17.5°	2010.5
20°	1907.3
22.5°	1796.0
25°	1676.8
27.5°	1553.6
30°	1426.5
32.5°	1307.3
35°	1196.0
37.5°	1104.7
40°	1005.3
42.5°	917.9
45°	830.4
47.5°	739.0
50°	647.6
52.5°	556.3
55°	464.9
57.5°	381.4
60°	301.9
62.5°	230.5
65°	162.9
67.5°	107.3
70°	63.6
72.5°	27.8
75°	8.0
77.5°	3.9
80°	3.9
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)