

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P170565

Luminaire Tested: **LDA4A13827D010TE LAR35FL 4LAL1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P170565
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26146)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA4A13827D010TE LAR35FL 4LAL1
Description: PORTFOLIO 4" Lensed Adjustable, Self-flange Trim Ring, 35° Flood Optic, at 0° tilt
Light Source: (1) HIGH LUMEN LED 80CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1385.1 lumens
Efficiency: N/A
Efficacy: 62.2 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.55
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 22.27
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P170565

CATALOG NUMBER: LDA4A13827D010TE LAR35FL 4LAL1

Luminous Intensity Polar Plot

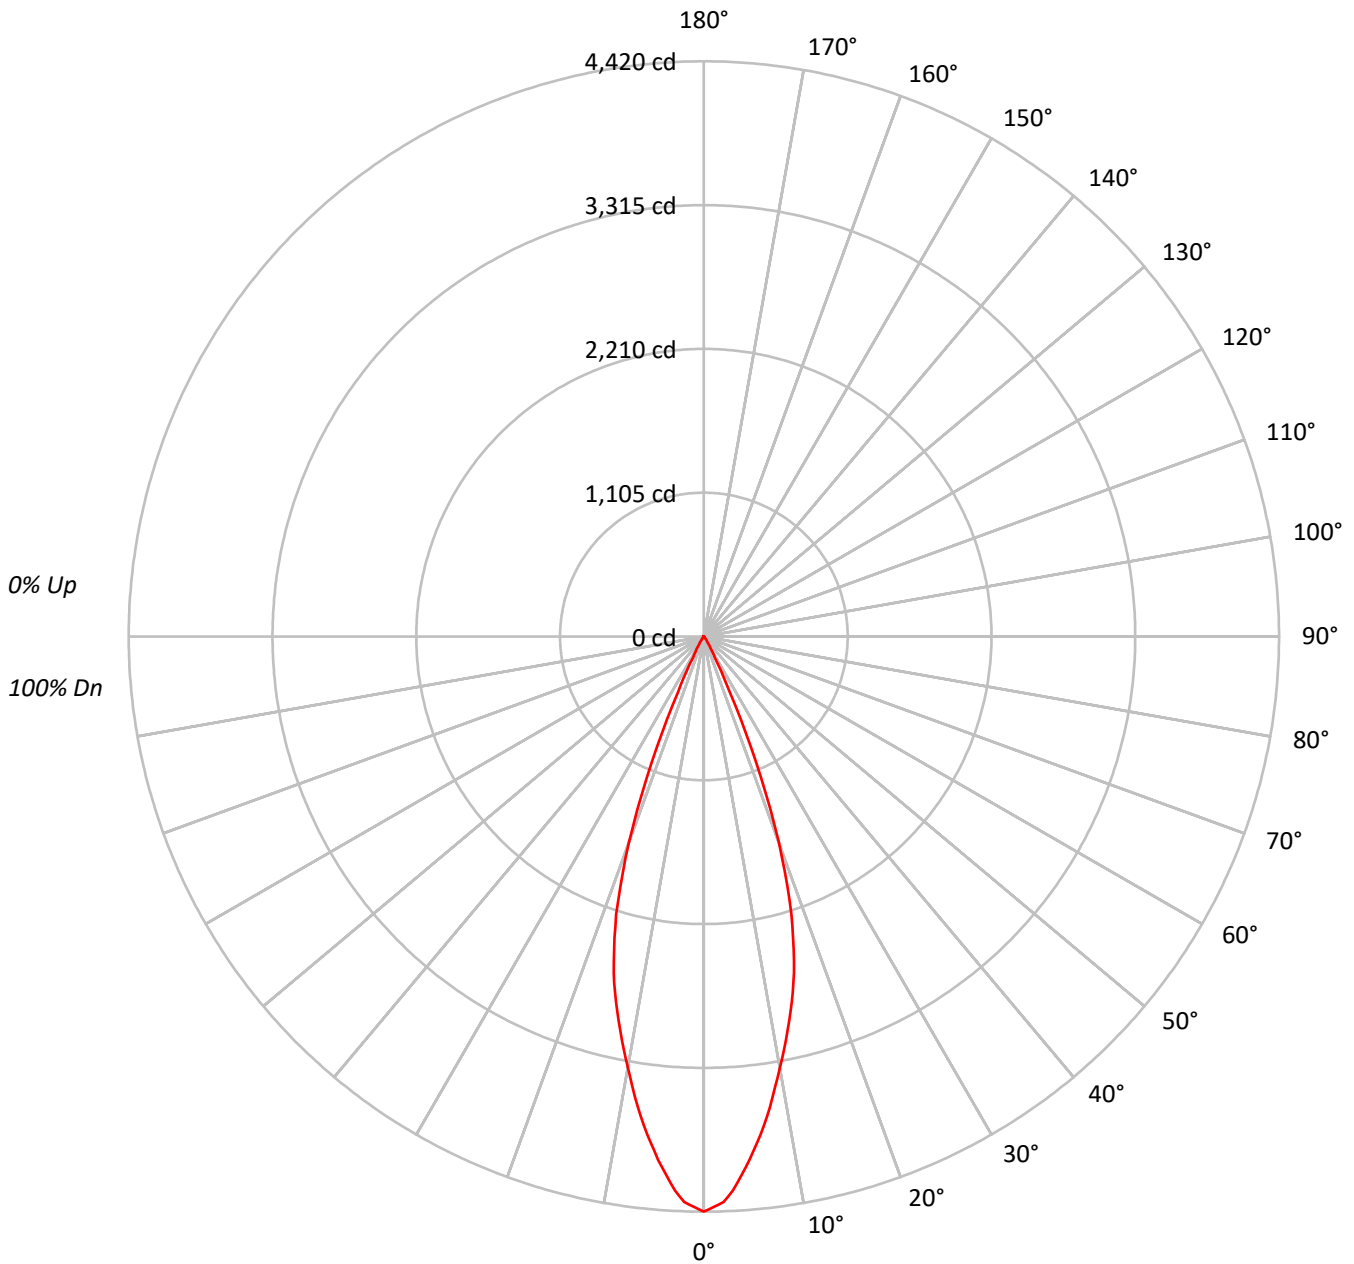



TEST NUMBER: P170565

CATALOG NUMBER: LDA4A13827D010TE LAR35FL 4LAL1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	111	109	113	111	109	107	107	105	104	103	102	101	100	99	98	96
2	111	107	104	102	109	106	103	100	102	100	98	100	98	96	97	96	94	93
3	107	103	99	96	105	101	98	95	99	96	94	96	94	92	94	92	91	90
4	104	98	94	91	102	97	93	91	95	92	90	93	91	89	92	89	88	86
5	101	94	90	87	99	94	90	87	92	89	86	90	88	85	89	87	85	83
6	97	91	87	83	96	90	86	83	89	85	83	88	85	82	86	84	82	81
7	94	88	83	80	93	87	83	80	86	82	80	85	82	79	84	81	79	78
8	92	85	80	77	91	84	80	77	83	80	77	82	79	77	82	79	76	75
9	89	82	78	75	88	82	77	75	81	77	74	80	77	74	79	76	74	73
10	86	79	75	72	86	79	75	72	78	75	72	78	74	72	77	74	72	71

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	545126
5°	499687
10°	421436
15°	341729
20°	221294
25°	63802
30°	13944
35°	3945
40°	1481
45°	611
50°	269
55°	151
60°	173
65°	204
70°	252
75°	0
80°	0
85°	0



TEST NUMBER: P170565

CATALOG NUMBER: LDA4A13827D010TE LAR35FL 4LAL1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	363.6	26.3
10°-20°	718.0	51.8
20°-30°	276.6	20.0
30°-40°	21.9	1.6
40°-50°	3.1	0.2
50°-60°	0.7	0.1
60°-70°	0.7	0.1
70°-80°	0.3	0.0
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1358.2	98.1
0°-40°	1380.1	99.6
0°-60°	1383.9	99.9
0°-90°	1385.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1385.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4420	
5°	4036	364
15°	2676	718
25°	469	277
35°	26	22
45°	4	3
55°	1	1
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P170565

CATALOG NUMBER: LDA4A13827D010TE LAR35FL 4LAL1

CANDELA DISTRIBUTION (FULL):

	0°
0°	4419.5
1°	4384.0
2°	4347.8
3°	4262.7
4°	4150.6
5°	4035.7
6°	3909.5
7°	3786.8
8°	3651.3
9°	3504.5
10°	3364.8
11°	3231.4
12°	3092.4
13°	2959.8
14°	2824.3
15°	2676.1
17.5°	2240.6
20°	1685.9
22.5°	1041.9
25°	468.8
27.5°	180.2
30°	97.9
32.5°	50.4
35°	26.2
37.5°	15.6
40°	9.2
42.5°	5.7
45°	3.5
47.5°	2.1
50°	1.4
52.5°	0.7
55°	0.7
57.5°	0.7
60°	0.7
62.5°	0.7
65°	0.7
67.5°	0.7
70°	0.7
72.5°	0.0
75°	0.0
77.5°	0.7
80°	0.0
82.5°	0.0



TEST NUMBER: P170565

CATALOG NUMBER: LDA4A13827D010TE LAR35FL 4LAL1

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.7



(END OF REPORT)