

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P170613

Luminaire Tested: **LDA4A18827D010TE LAR25NF 4LFC1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P170613
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P26142)
Test Lab: INNOVATION CENTER-P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA4A18827D010TE LAR25NF 4LFC1
Description: PORTFOLIO 4" Flat Cone, Self-flange Trim Ring, 25° Narrow Flood Optic, at 0° tilt
Light Source: (1) HIGH LUMEN LED 80CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1818.9 lumens
Efficiency: N/A
Efficacy: 62.5 lumens/watt
Spacing Criteria (0/90/45): 0.46 / 0.46 / 0.47
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 29.12
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P170613

CATALOG NUMBER: LDA4A18827D010TE LAR25NF 4LFC1

Luminous Intensity Polar Plot

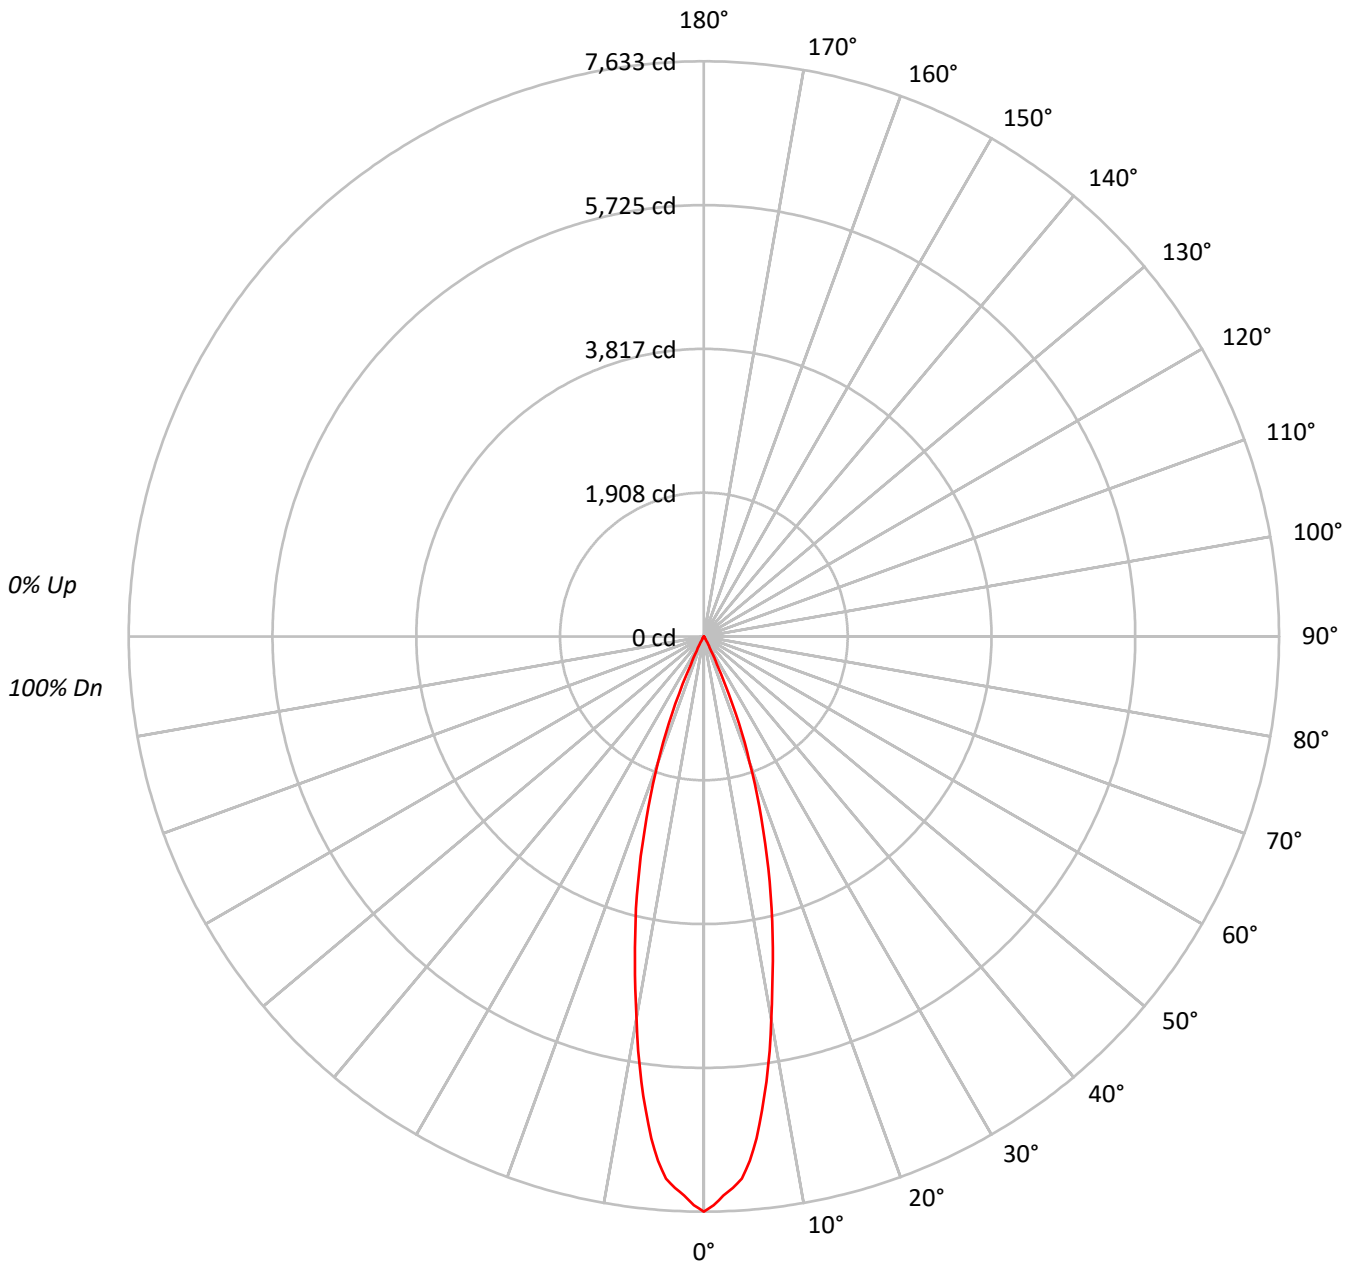



TEST NUMBER: P170613

CATALOG NUMBER: LDA4A18827D010TE LAR25NF 4LFC1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	113	111	110	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	97	97
2	111	108	105	103	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	94	94
3	108	104	100	97	106	102	99	96	100	97	95	98	95	94	95	94	92	91	91	91	91
4	105	100	96	93	103	99	95	92	97	94	91	95	92	90	93	91	89	88	88	88	88
5	102	96	92	89	100	95	92	89	94	91	88	92	89	87	91	89	87	86	86	86	86
6	99	93	89	86	98	92	88	86	91	88	85	90	87	85	89	86	84	83	83	83	83
7	96	90	86	83	95	89	86	83	88	85	83	87	84	82	86	84	82	81	81	81	81
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	79	79	79	79	79
9	91	85	81	78	90	84	81	78	84	80	78	83	80	78	82	79	77	76	76	76	76
10	89	82	79	76	88	82	78	76	81	78	76	81	78	76	80	77	75	74	74	74	74

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	941534
5°	864637
10°	645881
15°	430223
20°	233055
25°	55596
30°	13018
35°	3704
40°	1272
45°	454
50°	173
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P170613

CATALOG NUMBER: LDA4A18827D010TE LAR25NF 4LFC1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	605.2	33.3
10°-20°	912.6	50.2
20°-30°	278.6	15.3
30°-40°	20.1	1.1
40°-50°	2.3	0.1
50°-60°	0.1	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1796.4	98.8
0°-40°	1816.5	99.9
0°-60°	1818.9	100.0
0°-90°	1818.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1818.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7633	
5°	6983	605
15°	3369	913
25°	408	279
35°	25	20
45°	3	2
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P170613

CATALOG NUMBER: LDA4A18827D010TE LAR25NF 4LFC1

CANDELA DISTRIBUTION (FULL):

	0°
0°	7633.3
1°	7547.2
2°	7423.4
3°	7330.2
4°	7211.6
5°	6983.2
6°	6696.0
7°	6336.6
8°	5965.9
9°	5570.6
10°	5156.8
11°	4762.4
12°	4401.3
13°	4055.2
14°	3721.3
15°	3369.1
17.5°	2531.0
20°	1775.5
22.5°	1107.8
25°	408.5
27.5°	165.2
30°	91.4
32.5°	45.7
35°	24.6
37.5°	14.1
40°	7.9
42.5°	4.4
45°	2.6
47.5°	0.9
50°	0.9
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P170613

CATALOG NUMBER: LDA4A18827D010TE LAR25NF 4LFC1

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)