

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P210714

Luminaire Tested: **LSR4B10D010BZ EC4B10209024 4LBWWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P210714
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR4B10D010BZ EC4B10209024 4LBWWH1
Description: PORTFOLIO 4 INCH CYLINDER
WIDE DISTRIBUTION WITH WHEAT TRIM
WATTAGE D010TR-10.05W DE010-10.58W D5LT-10.2W DMX-10.6W DL2-11.8W
DL3-11.1W DLE-11.39W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 673.0 lumens
Efficiency: N/A
Efficacy: 68.0 lumens/watt
Spacing Criteria (0/90/45): 1.26 / 1.26 / 1.16
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct

Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P210714
CATALOG NUMBER: LSR4B10D010BZ EC4B10209024 4LBWWH1

Luminous Intensity Polar Plot

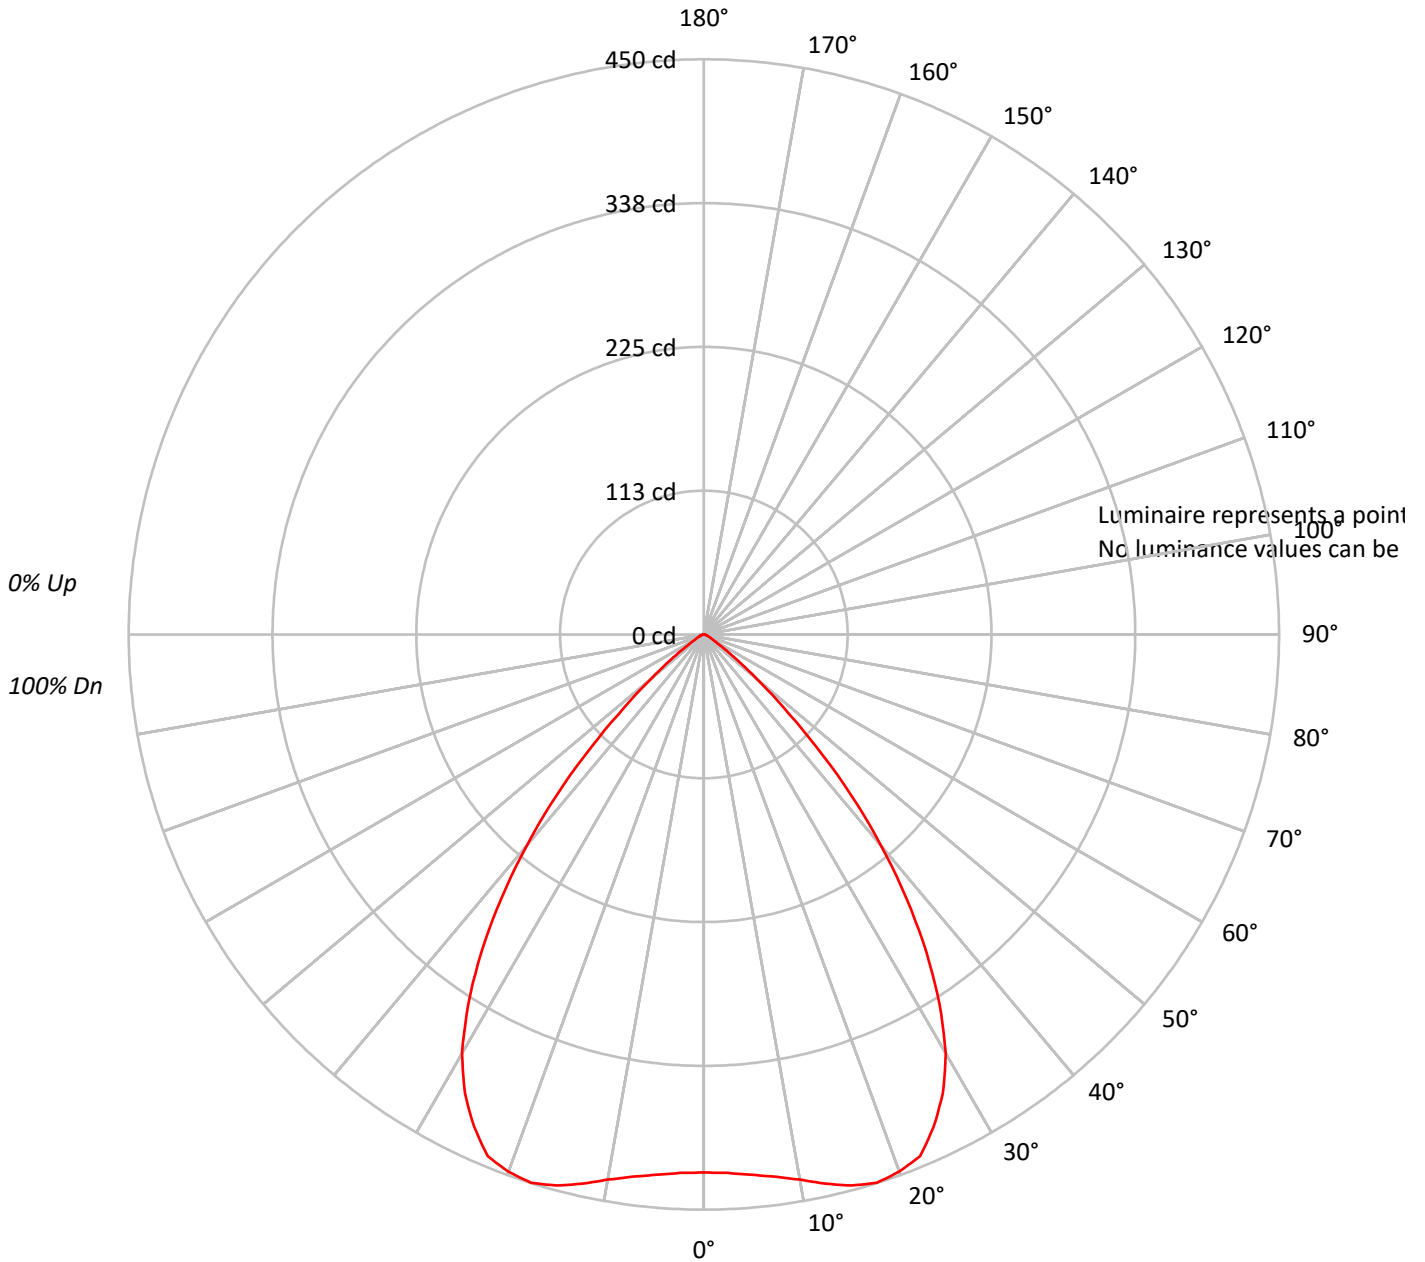



TEST NUMBER: P210714

CATALOG NUMBER: LSR4B10D010BZ EC4B10209024 4LBWWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	104	110	107	105	103	103	101	100	100	98	97	96	95	94	92																			
2	106	101	96	92	104	99	95	91	96	92	89	93	90	87	90	87	85	84																			
3	100	93	87	82	98	91	86	82	88	84	80	86	82	79	84	80	78	76																			
4	94	85	79	74	92	84	78	74	82	77	73	80	75	72	78	74	71	69																			
5	88	79	72	67	86	78	71	67	76	70	66	74	69	65	72	68	65	63																			
6	83	73	66	61	81	72	65	61	70	64	60	69	64	60	67	63	59	58																			
7	78	67	60	56	76	67	60	55	65	59	55	64	59	55	63	58	54	53																			
8	73	62	56	51	72	62	55	51	61	55	51	60	54	50	59	54	50	49																			
9	69	58	51	47	68	58	51	47	57	51	47	56	50	47	55	50	46	45																			
10	65	54	48	43	64	54	48	43	53	47	43	52	47	43	51	46	43	41																			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P210714

CATALOG NUMBER: LSR4B10D010BZ EC4B10209024 4LBWWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	40.8	6.1
10°-20°	126.1	18.7
20°-30°	194.0	28.8
30°-40°	187.2	27.8
40°-50°	97.6	14.5
50°-60°	20.5	3.1
60°-70°	4.8	0.7
70°-80°	1.9	0.3
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	360.9	53.6
0°-40°	548.1	81.4
0°-60°	666.2	99.0
0°-90°	673.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	673.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	421	
5°	424	41
15°	446	126
25°	425	194
35°	304	187
45°	124	98
55°	18	21
65°	4	5
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P210714

CATALOG NUMBER: LSR4B10D010BZ EC4B10209024 4LBWWH1

CANDELA DISTRIBUTION (FULL):

0°	
0°	420.8
2.5°	421.6
5°	424.3
7.5°	427.8
10°	433.1
12.5°	440.1
15°	446.3
17.5°	449.8
20°	447.2
22.5°	441.9
25°	425.2
27.5°	404.9
30°	378.5
32.5°	343.3
35°	303.7
37.5°	260.6
40°	215.7
42.5°	170.8
45°	124.1
47.5°	83.6
50°	53.7
52.5°	32.6
55°	18.5
57.5°	11.4
60°	7.9
62.5°	6.2
65°	4.4
67.5°	3.5
70°	2.6
72.5°	2.6
75°	1.8
77.5°	0.9
80°	0.9
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)