

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P210845

Luminaire Tested: **LSR4B10D010BZ EC4B10209030 4LBNWH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P210845  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR4B10D010BZ EC4B10209030 4LBNWH1  
Description: PORTFOLIO 4 INCH CYLINDER  
NARROW DISTRIBUTION WITH WHEAT TRIM  
WATTAGE D010TR-10.05W DE010-10.58W D5LT-10.2W DMX-10.6W DL2-11.8W  
DL3-11.1W DLE-11.39W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 602.2 lumens  
Efficiency: N/A  
Efficacy: 60.8 lumens/watt  
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.62  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 9.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P210845

CATALOG NUMBER: LSR4B10D010BZ EC4B10209030 4LBNWH1

### Luminous Intensity Polar Plot

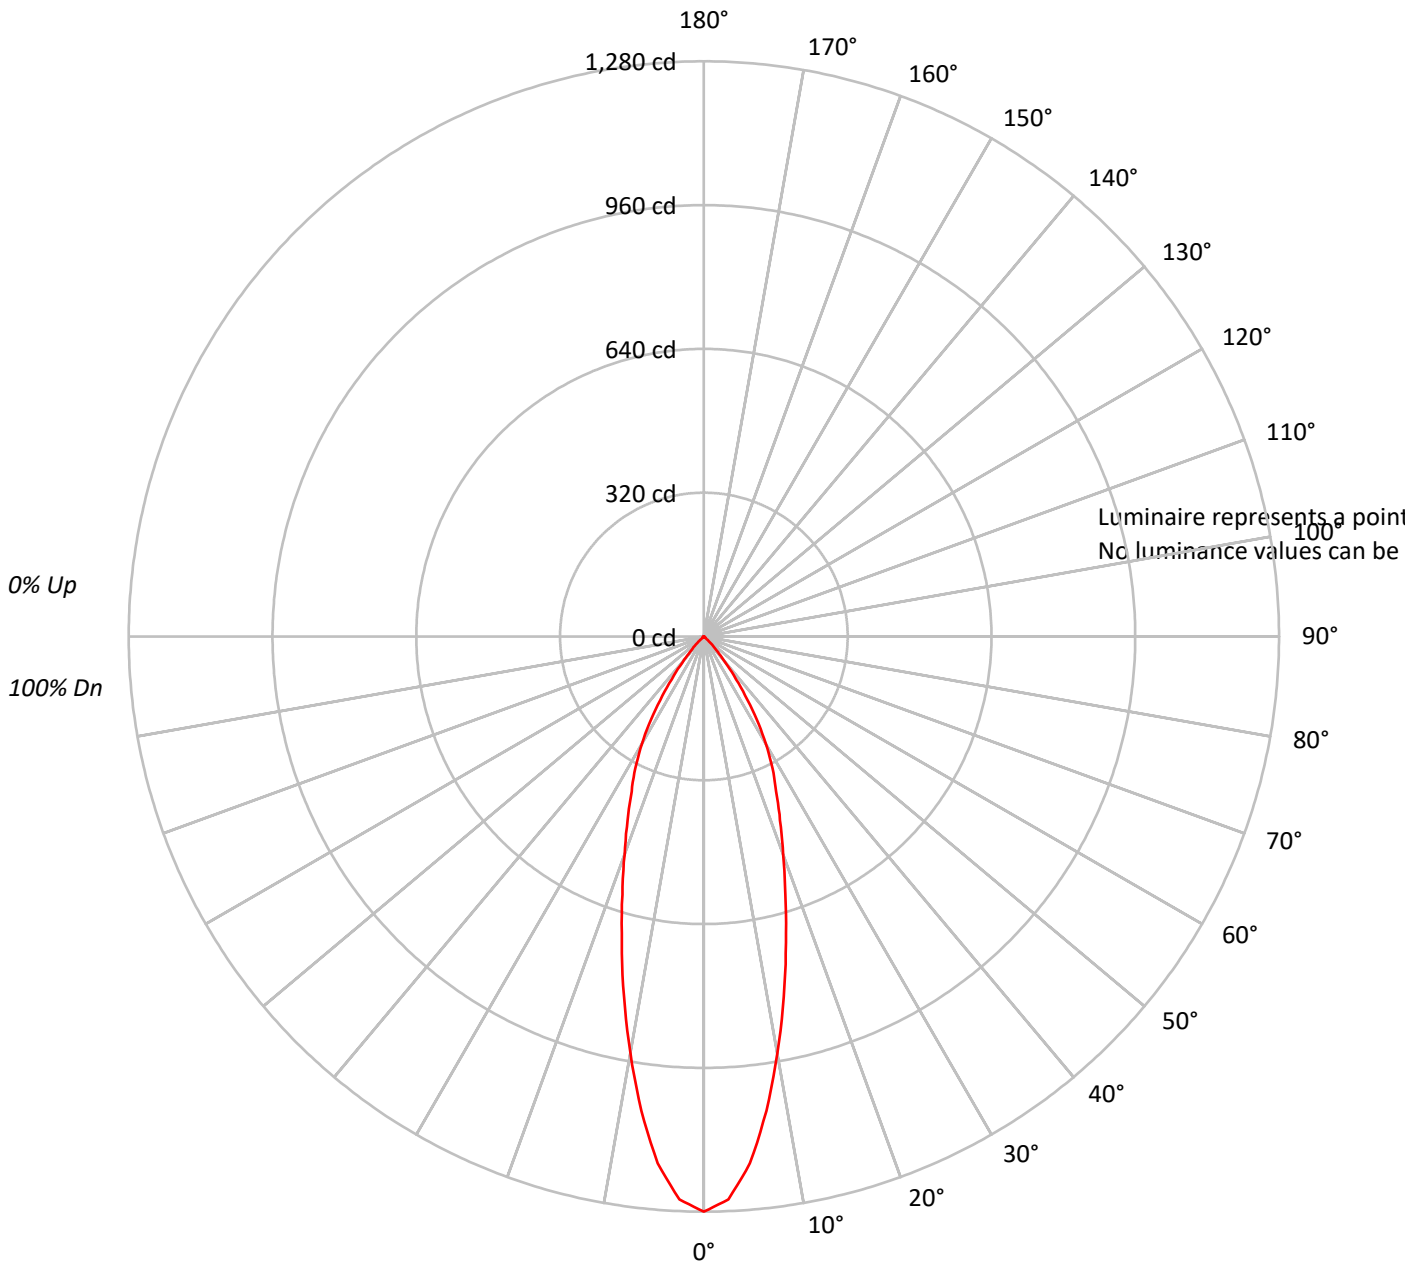



TEST NUMBER: P210845

CATALOG NUMBER: LSR4B10D010BZ EC4B10209030 4LBNWH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	112	109	107	105	105	104	102	102	100	99	98	97	96	95
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	92	91	89
3	104	98	94	90	102	97	93	90	94	91	88	92	89	87	90	87	85	84
4	100	93	88	84	98	92	87	83	90	86	82	88	84	82	86	83	81	79
5	95	88	82	78	94	87	82	78	85	81	77	83	80	77	82	79	76	75
6	91	83	78	74	90	82	77	74	81	76	73	79	76	73	78	75	72	71
7	87	79	73	70	86	78	73	69	77	72	69	76	72	69	75	71	68	67
8	84	75	70	66	82	74	69	66	73	69	65	72	68	65	71	68	65	64
9	80	71	66	62	79	71	66	62	70	65	62	69	65	62	68	65	62	61
10	77	68	63	59	76	68	63	59	67	62	59	66	62	59	66	62	59	58

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P210845

CATALOG NUMBER: LSR4B10D010BZ EC4B10209030 4LBNWH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	104.7	17.4
10°-20°	196.3	32.6
20°-30°	176.1	29.3
30°-40°	101.1	16.8
40°-50°	20.2	3.3
50°-60°	2.6	0.4
60°-70°	1.1	0.2
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	477.1	79.2
0°-40°	578.2	96.0
0°-60°	600.9	99.8
0°-90°	602.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	602.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1280	
5°	1177	105
15°	705	196
25°	380	176
35°	160	101
45°	22	20
55°	3	3
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P210845

CATALOG NUMBER: LSR4B10D010BZ EC4B10209030 4LBNWH1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1279.9
2.5°	1253.9
5°	1176.9
7.5°	1064.6
10°	942.0
12.5°	821.4
15°	704.9
17.5°	603.0
20°	515.7
22.5°	442.9
25°	380.5
27.5°	330.6
30°	275.5
32.5°	219.4
35°	160.1
37.5°	109.2
40°	67.6
42.5°	40.5
45°	21.8
47.5°	9.4
50°	4.2
52.5°	3.1
55°	3.1
57.5°	2.1
60°	2.1
62.5°	1.0
65°	1.0
67.5°	1.0
70°	1.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)