

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211146

Luminaire Tested: **LSR4B15D010BZ EC4B10209027 4LBWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P211146
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR4B15D010BZ EC4B10209027 4LBWH1
Description: PORTFOLIO 4 INCH CYLINDER
WIDE DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-14.39W DE010-14.29W D5LT-14.34W DMX-14.46W DL2-15.8W
DL3-15.28W DLE-15.432W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1026.8 lumens
Efficiency: N/A
Efficacy: 71.8 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.13
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P211146

CATALOG NUMBER: LSR4B15D010BZ EC4B10209027 4LBWH1

Luminous Intensity Polar Plot

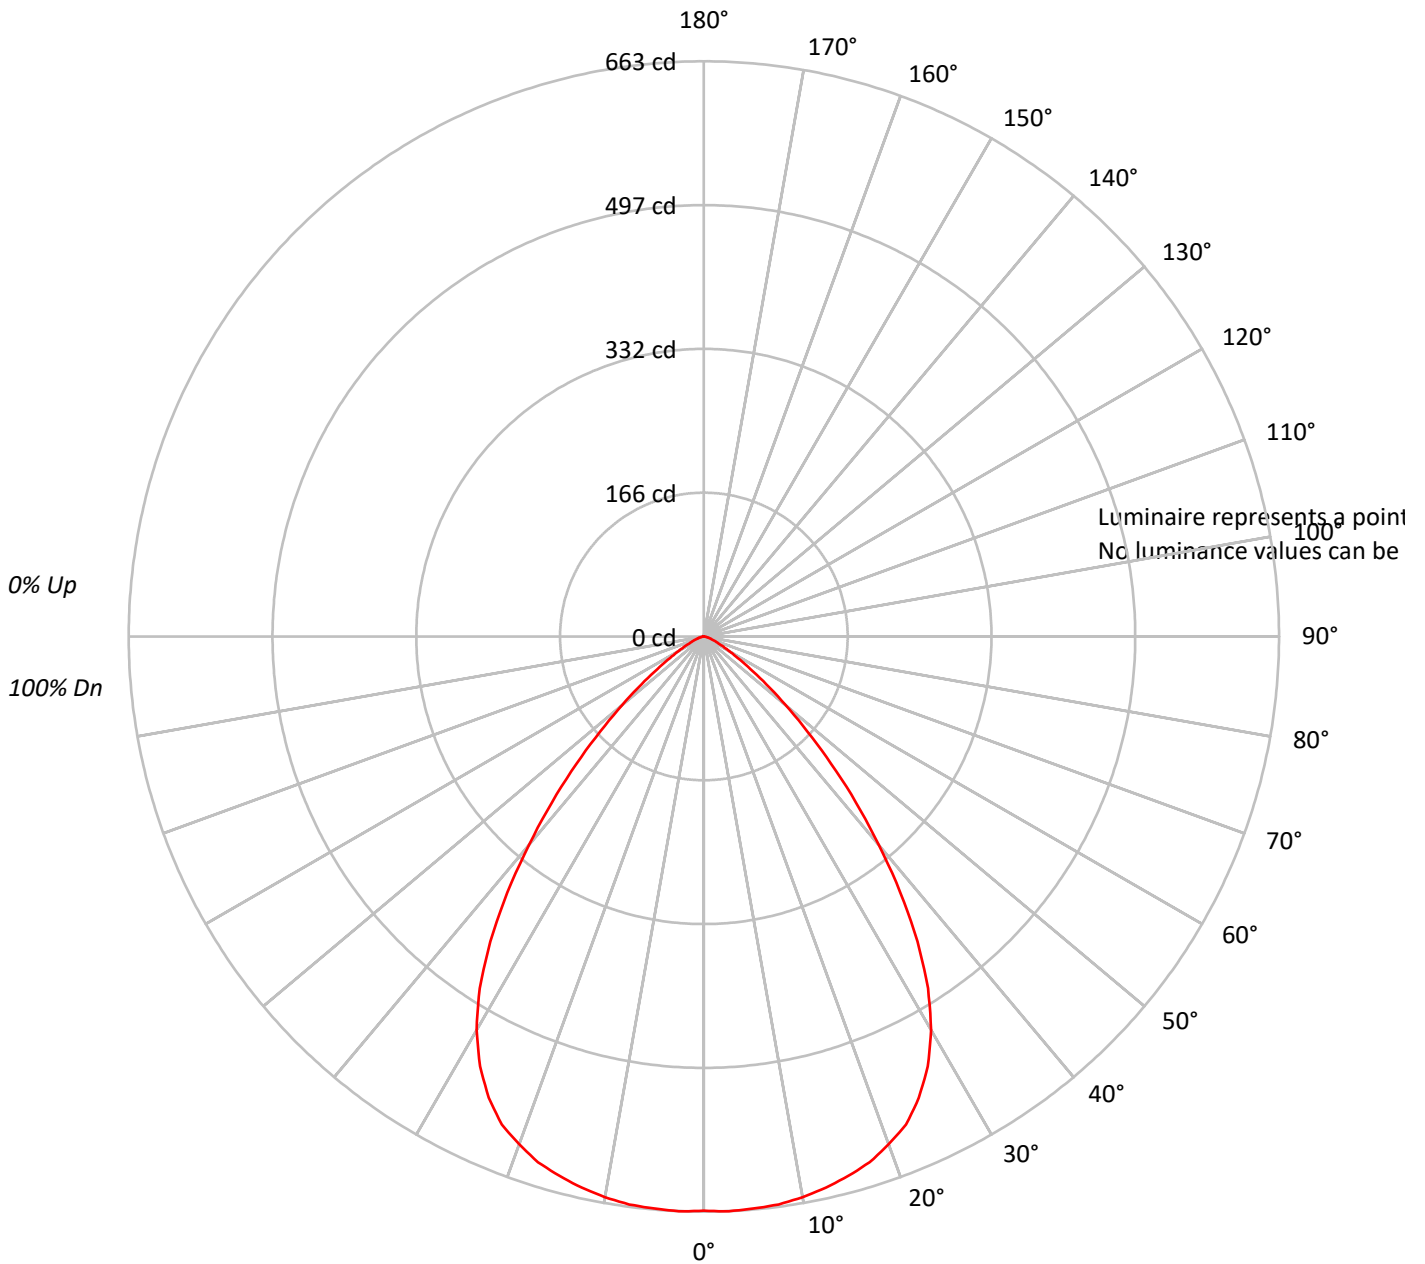



TEST NUMBER: P211146

CATALOG NUMBER: LSR4B15D010BZ EC4B10209027 4LBWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91			
2	105	100	95	91	103	98	93	90	95	91	88	91	88	86	89	86	84	82			
3	99	91	85	80	97	90	84	80	87	82	78	84	80	77	82	79	76	74			
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67			
5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	62	61			
6	81	71	64	58	80	70	63	58	68	62	58	67	61	57	65	61	57	55			
7	76	65	58	53	75	65	58	53	63	57	53	62	56	52	61	56	52	50			
8	72	60	53	49	70	60	53	49	59	53	48	58	52	48	57	52	48	46			
9	68	56	49	45	66	56	49	45	55	49	44	54	48	44	53	48	44	43			
10	64	52	46	41	63	52	46	41	51	45	41	50	45	41	49	44	41	39			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P211146

CATALOG NUMBER: LSR4B15D010BZ EC4B10209027 4LBWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	63.0	6.1
10°-20°	181.6	17.7
20°-30°	268.0	26.1
30°-40°	264.5	25.8
40°-50°	161.8	15.8
50°-60°	62.1	6.0
60°-70°	19.4	1.9
70°-80°	5.7	0.6
80°-90°	0.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	512.6	49.9
0°-40°	777.1	75.7
0°-60°	1001.0	97.5
0°-90°	1026.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1026.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	662	
5°	662	63
15°	644	182
25°	587	268
35°	429	264
45°	208	162
55°	66	62
65°	18	19
75°	6	6
85°	0	1
90°	0	



TEST NUMBER: P211146

CATALOG NUMBER: LSR4B15D010BZ EC4B10209027 4LBWH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	661.8
2.5°	663.2
5°	661.8
7.5°	660.4
10°	656.3
12.5°	650.7
15°	643.7
17.5°	635.4
20°	622.8
22.5°	608.9
25°	586.6
27.5°	558.7
30°	523.9
32.5°	480.7
35°	429.1
37.5°	372.0
40°	313.5
42.5°	259.2
45°	207.6
47.5°	161.6
50°	122.6
52.5°	90.6
55°	65.5
57.5°	46.0
60°	33.4
62.5°	25.1
65°	18.1
67.5°	13.9
70°	9.8
72.5°	7.0
75°	5.6
77.5°	2.8
80°	2.8
82.5°	1.4
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)