

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211297

Luminaire Tested: **LSR4B15D010BZ EC4B10209035 4LBCSMW1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P211297  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR4B15D010BZ EC4B10209035 4LBCSMW1  
Description: PORTFOLIO 4 INCH CYLINDER  
SHALLOW DISTRIBUTION WITH CAST MATTE WHITE TRIM  
WATTAGE D010TR-14.39W DE010-14.29W D5LT-14.34W DMX-14.46W DL2-15.8W  
DL3-15.28W DLE-15.432W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1351.5 lumens  
Efficiency: N/A  
Efficacy: 94.5 lumens/watt  
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 14.3  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P211297

CATALOG NUMBER: LSR4B15D010BZ EC4B10209035 4LBCSMW1

### Luminous Intensity Polar Plot

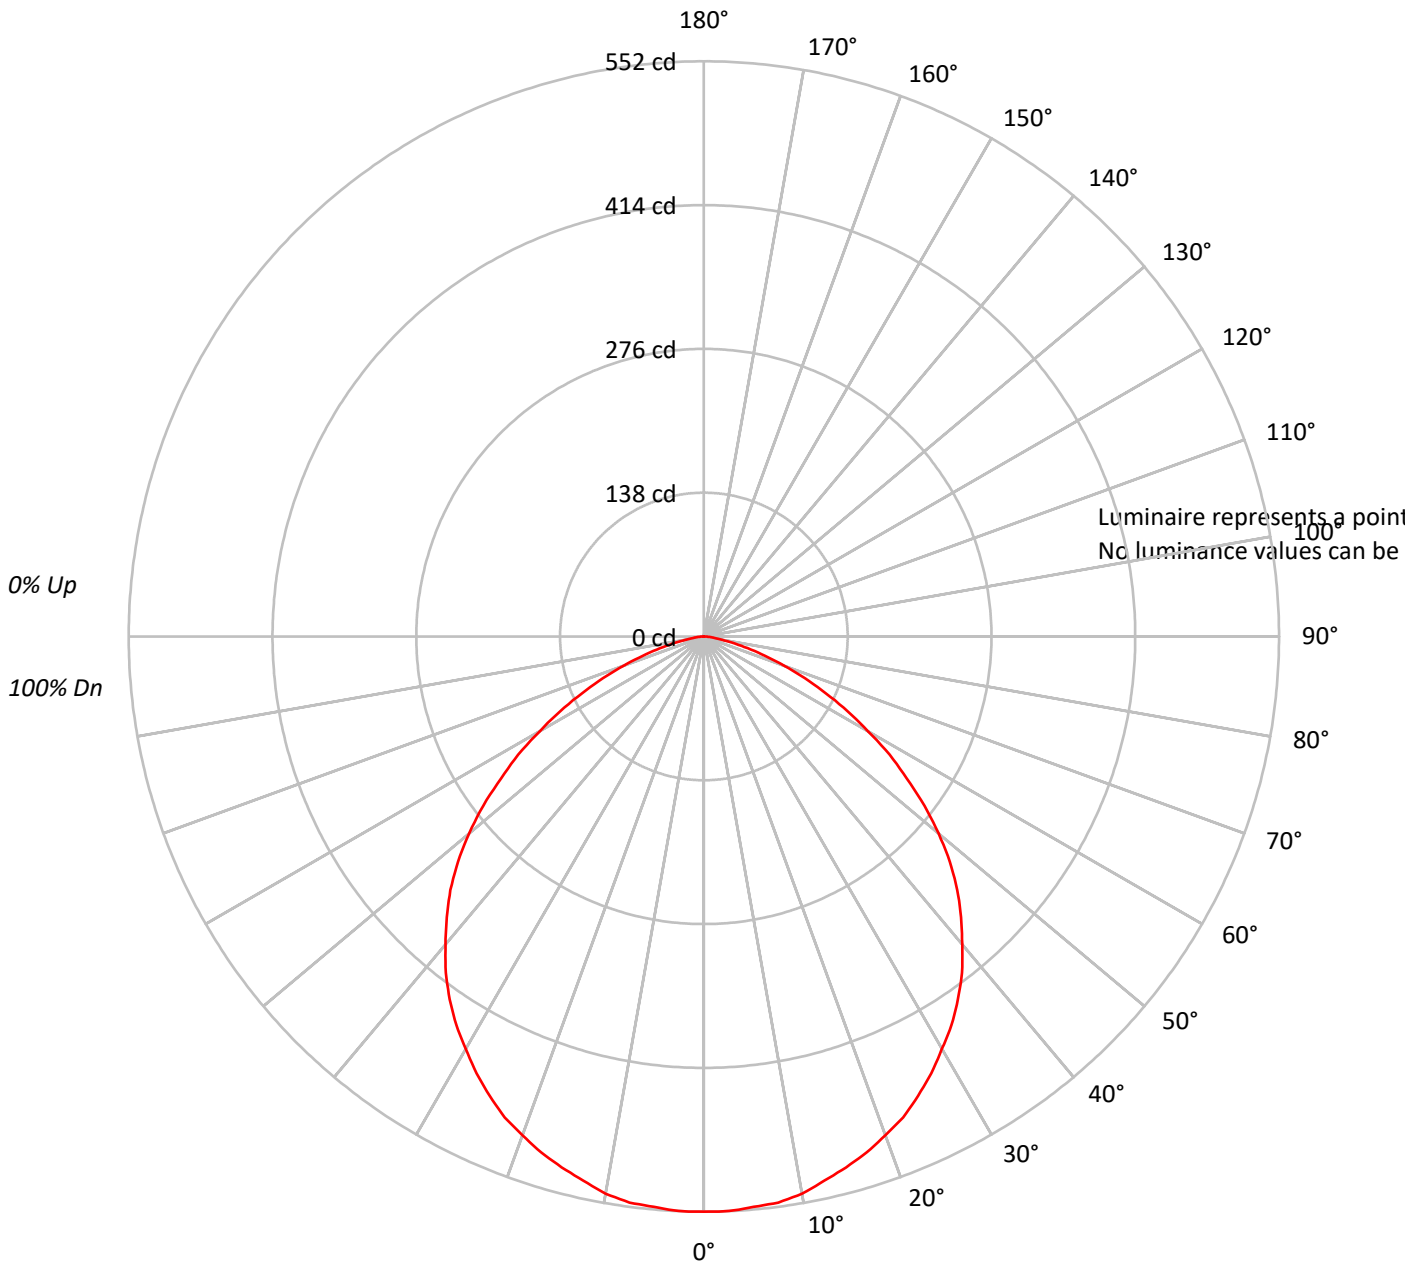



TEST NUMBER: P211297

CATALOG NUMBER: LSR4B15D010BZ EC4B10209035 4LBCSMW1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87	87	87	87
2	101	94	87	82	99	92	86	81	88	84	79	85	81	78	82	79	76	74	74	74	74
3	93	83	75	70	90	81	74	69	79	73	68	76	71	67	73	69	65	63	63	63	63
4	85	74	66	60	83	73	65	59	70	64	58	68	62	58	66	61	57	55	55	55	55
5	79	66	58	52	77	65	57	51	63	56	51	61	55	50	60	54	50	48	48	48	48
6	73	60	52	45	71	59	51	45	57	50	45	56	49	44	54	49	44	42	42	42	42
7	68	55	46	40	66	54	46	40	52	45	40	51	44	40	50	44	39	37	37	37	37
8	63	50	42	36	61	49	41	36	48	41	36	47	40	36	46	40	35	33	33	33	33
9	59	46	38	33	57	45	38	32	44	37	32	43	37	32	42	36	32	30	30	30	30
10	55	42	35	30	54	42	34	30	41	34	29	40	34	29	39	33	29	27	27	27	27

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P211297

CATALOG NUMBER: LSR4B15D010BZ EC4B10209035 4LBCSMW1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	52.3	3.9
10°-20°	148.9	11.0
20°-30°	224.0	16.6
30°-40°	265.4	19.6
40°-50°	264.2	19.5
50°-60°	212.9	15.8
60°-70°	128.8	9.5
70°-80°	47.8	3.5
80°-90°	7.1	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	425.2	31.5
0°-40°	690.6	51.1
0°-60°	1167.7	86.4
0°-90°	1351.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1351.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	552	
5°	550	52
15°	527	149
25°	486	224
35°	425	265
45°	344	264
55°	238	213
65°	129	129
75°	43	48
85°	6	7
90°	0	



TEST NUMBER: P211297

CATALOG NUMBER: LSR4B15D010BZ EC4B10209035 4LBCSMW1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	552.0
2.5°	552.0
5°	549.5
7.5°	547.9
10°	543.0
12.5°	534.8
15°	527.4
17.5°	519.2
20°	509.4
22.5°	499.6
25°	486.5
27.5°	472.6
30°	457.0
32.5°	442.3
35°	425.1
37.5°	407.0
40°	385.7
42.5°	365.3
45°	344.0
47.5°	320.2
50°	294.0
52.5°	267.0
55°	237.5
57.5°	211.3
60°	181.8
62.5°	155.6
65°	129.4
67.5°	104.8
70°	81.9
72.5°	61.4
75°	43.4
77.5°	27.8
80°	16.4
82.5°	9.8
85°	5.7
87.5°	2.5
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)