

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211412

Luminaire Tested: **LSR4B15D010BZ EC4B10209050 4LBCSMMS1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P211412
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR4B15D010BZ EC4B10209050 4LBCSMMS1
Description: PORTFOLIO 4 INCH CYLINDER
SHALLOW DISTRIBUTION WITH CAST MATTE BLACK TRIM
WATTAGE D010TR-14.39W DE010-14.29W D5LT-14.34W DMX-14.46W DL2-15.8W
DL3-15.28W DLE-15.432W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1148.5 lumens
Efficiency: N/A
Efficacy: 80.3 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.27
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P211412

CATALOG NUMBER: LSR4B15D010BZ EC4B10209050 4LBCSMMS1

Luminous Intensity Polar Plot

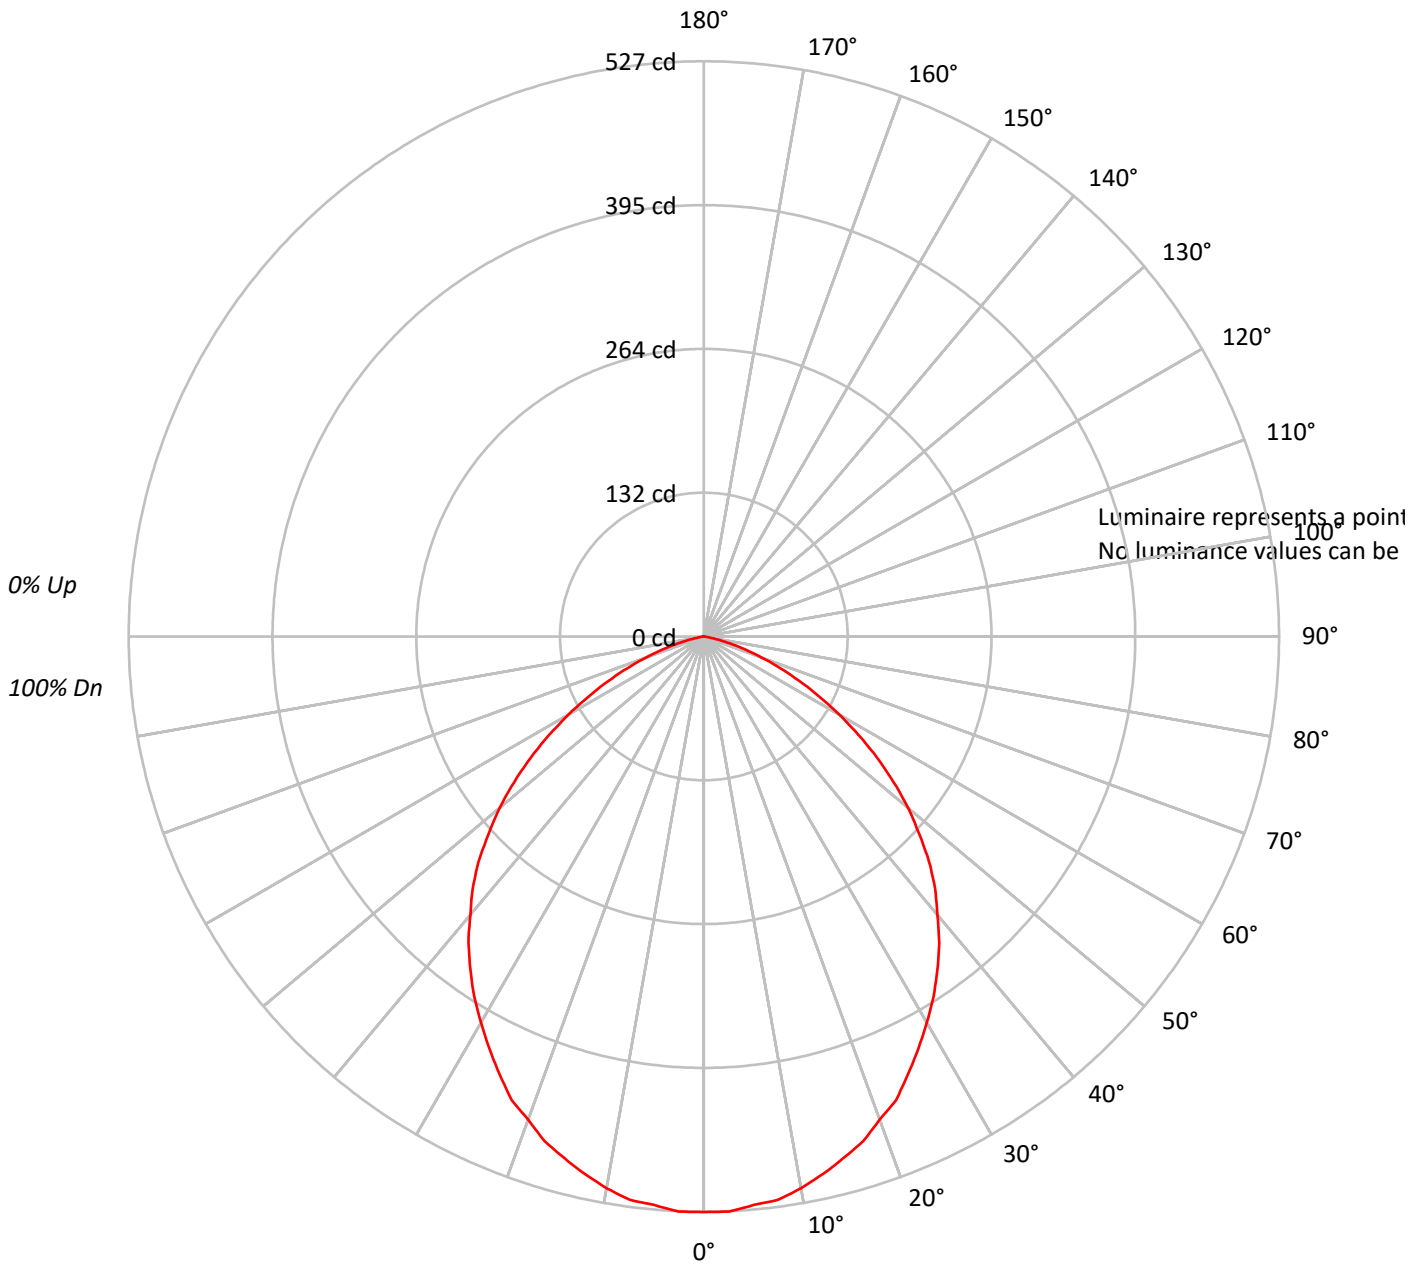



TEST NUMBER: P211412

CATALOG NUMBER: LSR4B15D010BZ EC4B10209050 4LBCSMMS1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|--|--|--|--|--|--|----|--|--|--|--|--|--|--|--|---|
| RF | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | |
| RC | 80 | | | | | | | | | 50 | | | | | | | | | 30 | | | | | | | | | 10 | | | | | | | | | 0 |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 | | | | | | | | | | | | | | | | |
| RCR | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | | | | | | | | | | | | | | | | | |
| 1 | 111 | 107 | 103 | 100 | 108 | 105 | 101 | 98 | 100 | 98 | 95 | 97 | 94 | 92 | 93 | 91 | 90 | 88 | | | | | | | | | | | | | | | | | | | |
| 2 | 102 | 95 | 89 | 84 | 99 | 93 | 88 | 83 | 90 | 85 | 81 | 86 | 83 | 79 | 83 | 80 | 78 | 76 | | | | | | | | | | | | | | | | | | | |
| 3 | 94 | 85 | 77 | 72 | 92 | 83 | 76 | 71 | 80 | 74 | 70 | 77 | 73 | 69 | 75 | 71 | 67 | 65 | | | | | | | | | | | | | | | | | | | |
| 4 | 87 | 76 | 68 | 62 | 84 | 74 | 67 | 61 | 72 | 66 | 61 | 70 | 64 | 60 | 68 | 63 | 59 | 57 | | | | | | | | | | | | | | | | | | | |
| 5 | 80 | 68 | 60 | 54 | 78 | 67 | 59 | 54 | 65 | 58 | 53 | 63 | 57 | 53 | 61 | 56 | 52 | 50 | | | | | | | | | | | | | | | | | | | |
| 6 | 74 | 62 | 54 | 48 | 72 | 61 | 53 | 47 | 59 | 52 | 47 | 58 | 51 | 47 | 56 | 51 | 46 | 44 | | | | | | | | | | | | | | | | | | | |
| 7 | 69 | 56 | 48 | 42 | 67 | 56 | 48 | 42 | 54 | 47 | 42 | 53 | 46 | 42 | 51 | 46 | 41 | 40 | | | | | | | | | | | | | | | | | | | |
| 8 | 64 | 52 | 44 | 38 | 63 | 51 | 43 | 38 | 50 | 43 | 38 | 48 | 42 | 38 | 47 | 42 | 37 | 36 | | | | | | | | | | | | | | | | | | | |
| 9 | 60 | 48 | 40 | 34 | 59 | 47 | 40 | 34 | 46 | 39 | 34 | 45 | 39 | 34 | 44 | 38 | 34 | 32 | | | | | | | | | | | | | | | | | | | |
| 10 | 57 | 44 | 36 | 31 | 55 | 43 | 36 | 31 | 43 | 36 | 31 | 42 | 35 | 31 | 41 | 35 | 31 | 29 | | | | | | | | | | | | | | | | | | | |

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P211412

CATALOG NUMBER: LSR4B15D010BZ EC4B10209050 4LBCSMMS1

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 49.7 | 4.3 |
| 10°-20° | 139.5 | 12.1 |
| 20°-30° | 203.7 | 17.7 |
| 30°-40° | 233.0 | 20.3 |
| 40°-50° | 223.9 | 19.5 |
| 50°-60° | 172.9 | 15.1 |
| 60°-70° | 96.5 | 8.4 |
| 70°-80° | 28.1 | 2.4 |
| 80°-90° | 1.2 | 0.1 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 392.8 | 34.2 |
| 0°-40° | 625.8 | 54.5 |
| 0°-60° | 1022.6 | 89.0 |
| 0°-90° | 1148.5 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 1148.5 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|-----|------|
| 0° | 527 | |
| 5° | 523 | 50 |
| 15° | 495 | 139 |
| 25° | 443 | 204 |
| 35° | 373 | 233 |
| 45° | 292 | 224 |
| 55° | 194 | 173 |
| 65° | 97 | 97 |
| 75° | 24 | 28 |
| 85° | 1 | 1 |
| 90° | 0 | |



TEST NUMBER: P211412

CATALOG NUMBER: LSR4B15D010BZ EC4B10209050 4LBCSMMS1

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|-------|
| 0° | 527.4 |
| 2.5° | 527.4 |
| 5° | 522.9 |
| 7.5° | 520.7 |
| 10° | 513.3 |
| 12.5° | 504.4 |
| 15° | 494.7 |
| 17.5° | 485.0 |
| 20° | 470.9 |
| 22.5° | 459.8 |
| 25° | 442.7 |
| 27.5° | 425.6 |
| 30° | 408.5 |
| 32.5° | 391.5 |
| 35° | 372.9 |
| 37.5° | 354.3 |
| 40° | 332.8 |
| 42.5° | 313.5 |
| 45° | 291.9 |
| 47.5° | 267.4 |
| 50° | 244.4 |
| 52.5° | 219.1 |
| 55° | 193.9 |
| 57.5° | 167.9 |
| 60° | 143.4 |
| 62.5° | 118.8 |
| 65° | 96.6 |
| 67.5° | 75.8 |
| 70° | 56.5 |
| 72.5° | 39.4 |
| 75° | 24.5 |
| 77.5° | 12.6 |
| 80° | 4.5 |
| 82.5° | 1.5 |
| 85° | 0.7 |
| 87.5° | 0.0 |
| 90° | 0.0 |



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)