

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211415

Luminaire Tested: **LSR4B15D010BZ EC4B10209050 4LBMGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P211415
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LSR4B15D010BZ EC4B10209050 4LBMGPH1
Description: PORTFOLIO 4 INCH CYLINDER
MEDIUM DISTRIBUTION WITH GRAPHITE HAZE TRIM
WATTAGE D010TR-14.39W DE010-14.29W D5LT-14.34W DMX-14.46W DL2-15.8W
DL3-15.28W DLE-15.432W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 703.3 lumens
Efficiency: N/A
Efficacy: 49.2 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.92
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 14.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P211415

CATALOG NUMBER: LSR4B15D010BZ EC4B10209050 4LBMGPH1

Luminous Intensity Polar Plot

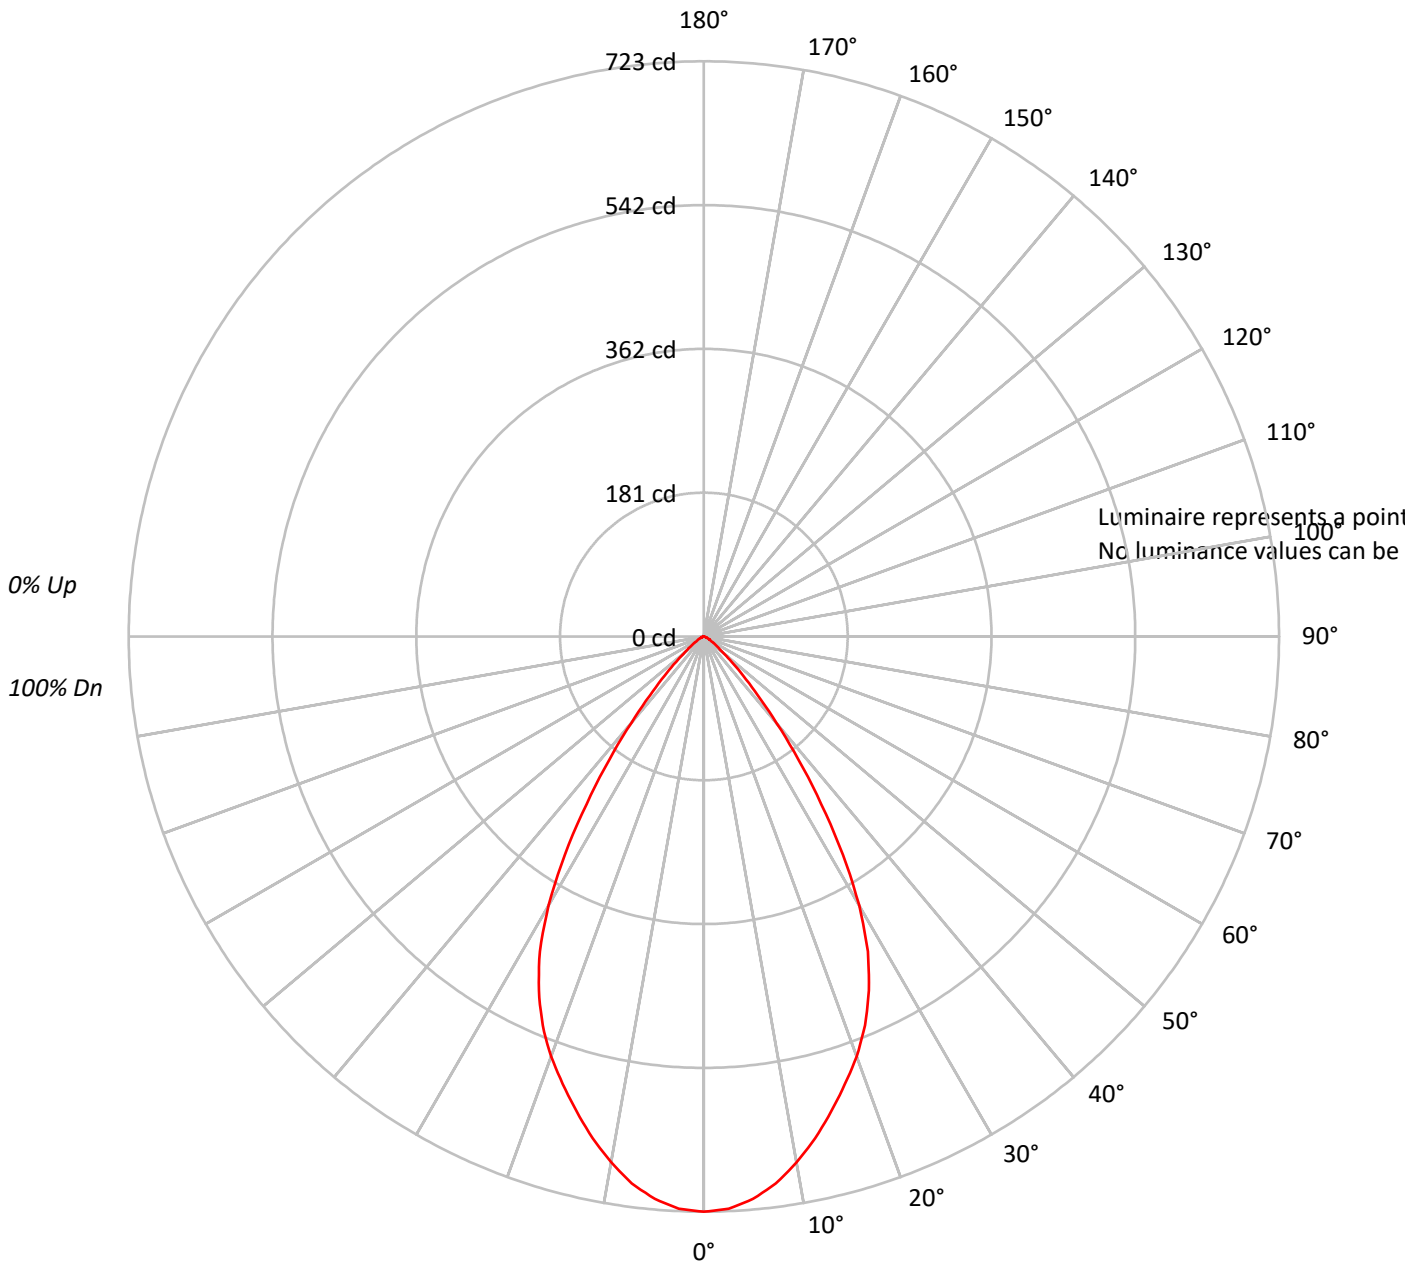



TEST NUMBER: P211415

CATALOG NUMBER: LSR4B15D010BZ EC4B10209050 4LBMGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|--|--|--|-----|--|--|--|--|--|--|--|--|---|--|--|--|--|--|--|--|--|
| RF | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | | | | | | | | | |
| RC | 80 | | | | | | | | | 70 | | | | | | | | | 50 | | | | | | | | | 30 | | | | | | | | | 10 | | | | | | | | | 0 | | | | | | | | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 | | | | | | | | | | | | | | | | | | | | | |
| RCR | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | | | | | | | | | | | | | | | | | 100 | | | | | | | | | | | | | | | | | |
| 1 | 113 | 110 | 108 | 105 | 111 | 108 | 106 | 104 | 104 | 102 | 101 | 100 | 99 | 98 | 97 | 96 | 95 | 93 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 107 | 102 | 98 | 94 | 105 | 100 | 97 | 93 | 97 | 94 | 91 | 94 | 92 | 89 | 91 | 89 | 88 | 86 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 102 | 95 | 90 | 85 | 100 | 93 | 89 | 85 | 91 | 87 | 83 | 88 | 85 | 82 | 86 | 83 | 81 | 79 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 96 | 88 | 82 | 78 | 94 | 87 | 82 | 78 | 85 | 80 | 77 | 83 | 79 | 76 | 81 | 78 | 75 | 73 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 91 | 82 | 76 | 72 | 89 | 81 | 76 | 71 | 79 | 74 | 71 | 78 | 73 | 70 | 76 | 72 | 69 | 68 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | 86 | 77 | 71 | 66 | 85 | 76 | 70 | 66 | 74 | 69 | 65 | 73 | 68 | 65 | 72 | 68 | 64 | 63 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | 82 | 72 | 66 | 61 | 80 | 71 | 65 | 61 | 70 | 65 | 61 | 69 | 64 | 60 | 68 | 63 | 60 | 59 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 | 77 | 67 | 61 | 57 | 76 | 67 | 61 | 57 | 66 | 60 | 57 | 65 | 60 | 56 | 64 | 59 | 56 | 55 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 | 73 | 63 | 57 | 53 | 72 | 63 | 57 | 53 | 62 | 57 | 53 | 61 | 56 | 53 | 60 | 56 | 52 | 51 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | 70 | 60 | 54 | 50 | 69 | 59 | 54 | 50 | 59 | 53 | 50 | 58 | 53 | 49 | 57 | 52 | 49 | 48 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P211415

CATALOG NUMBER: LSR4B15D010BZ EC4B10209050 4LBMGPH1

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 66.5 | 9.5 |
| 10°-20° | 173.5 | 24.7 |
| 20°-30° | 222.5 | 31.6 |
| 30°-40° | 160.8 | 22.9 |
| 40°-50° | 57.7 | 8.2 |
| 50°-60° | 15.6 | 2.2 |
| 60°-70° | 5.1 | 0.7 |
| 70°-80° | 1.6 | 0.2 |
| 80°-90° | 0.0 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 462.5 | 65.8 |
| 0°-40° | 623.4 | 88.6 |
| 0°-60° | 696.6 | 99.0 |
| 0°-90° | 703.3 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 703.3 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|-----|------|
| 0° | 723 | |
| 5° | 710 | 67 |
| 15° | 618 | 173 |
| 25° | 491 | 223 |
| 35° | 257 | 161 |
| 45° | 70 | 58 |
| 55° | 16 | 16 |
| 65° | 4 | 5 |
| 75° | 2 | 2 |
| 85° | 0 | 0 |
| 90° | 0 | |



TEST NUMBER: P211415

CATALOG NUMBER: LSR4B15D010BZ EC4B10209050 4LBMGPH1

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|-------|
| 0° | 723.0 |
| 2.5° | 720.0 |
| 5° | 709.7 |
| 7.5° | 693.4 |
| 10° | 671.2 |
| 12.5° | 646.1 |
| 15° | 618.0 |
| 17.5° | 589.9 |
| 20° | 561.8 |
| 22.5° | 529.3 |
| 25° | 490.9 |
| 27.5° | 446.5 |
| 30° | 390.3 |
| 32.5° | 325.3 |
| 35° | 257.3 |
| 37.5° | 195.2 |
| 40° | 141.9 |
| 42.5° | 100.5 |
| 45° | 69.5 |
| 47.5° | 47.3 |
| 50° | 31.0 |
| 52.5° | 22.2 |
| 55° | 16.3 |
| 57.5° | 11.8 |
| 60° | 8.9 |
| 62.5° | 7.4 |
| 65° | 4.4 |
| 67.5° | 3.0 |
| 70° | 3.0 |
| 72.5° | 1.5 |
| 75° | 1.5 |
| 77.5° | 1.5 |
| 80° | 0.0 |
| 82.5° | 0.0 |
| 85° | 0.0 |
| 87.5° | 0.0 |
| 90° | 0.0 |



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)