

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211498

Luminaire Tested: **LSR4B20D010BZ EC4B10209027 4LBCSMB1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P211498  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR4B20D010BZ EC4B10209027 4LBCSMB1  
Description: PORTFOLIO 4 INCH CYLINDER  
SHALLOW DISTRIBUTION WITH CAST MATTE METALLIC SILVER TRIM  
WATTAGE D010TR-21.86W DE010-20.46W D5LT-21.24W DMX-20.89W DL2-22.5W  
DL3-21.8 6W DLE-22.46W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1624.9 lumens  
Efficiency: N/A  
Efficacy: 78.1 lumens/watt  
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 20.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P211498

CATALOG NUMBER: LSR4B20D010BZ EC4B10209027 4LBCSMB1

### Luminous Intensity Polar Plot

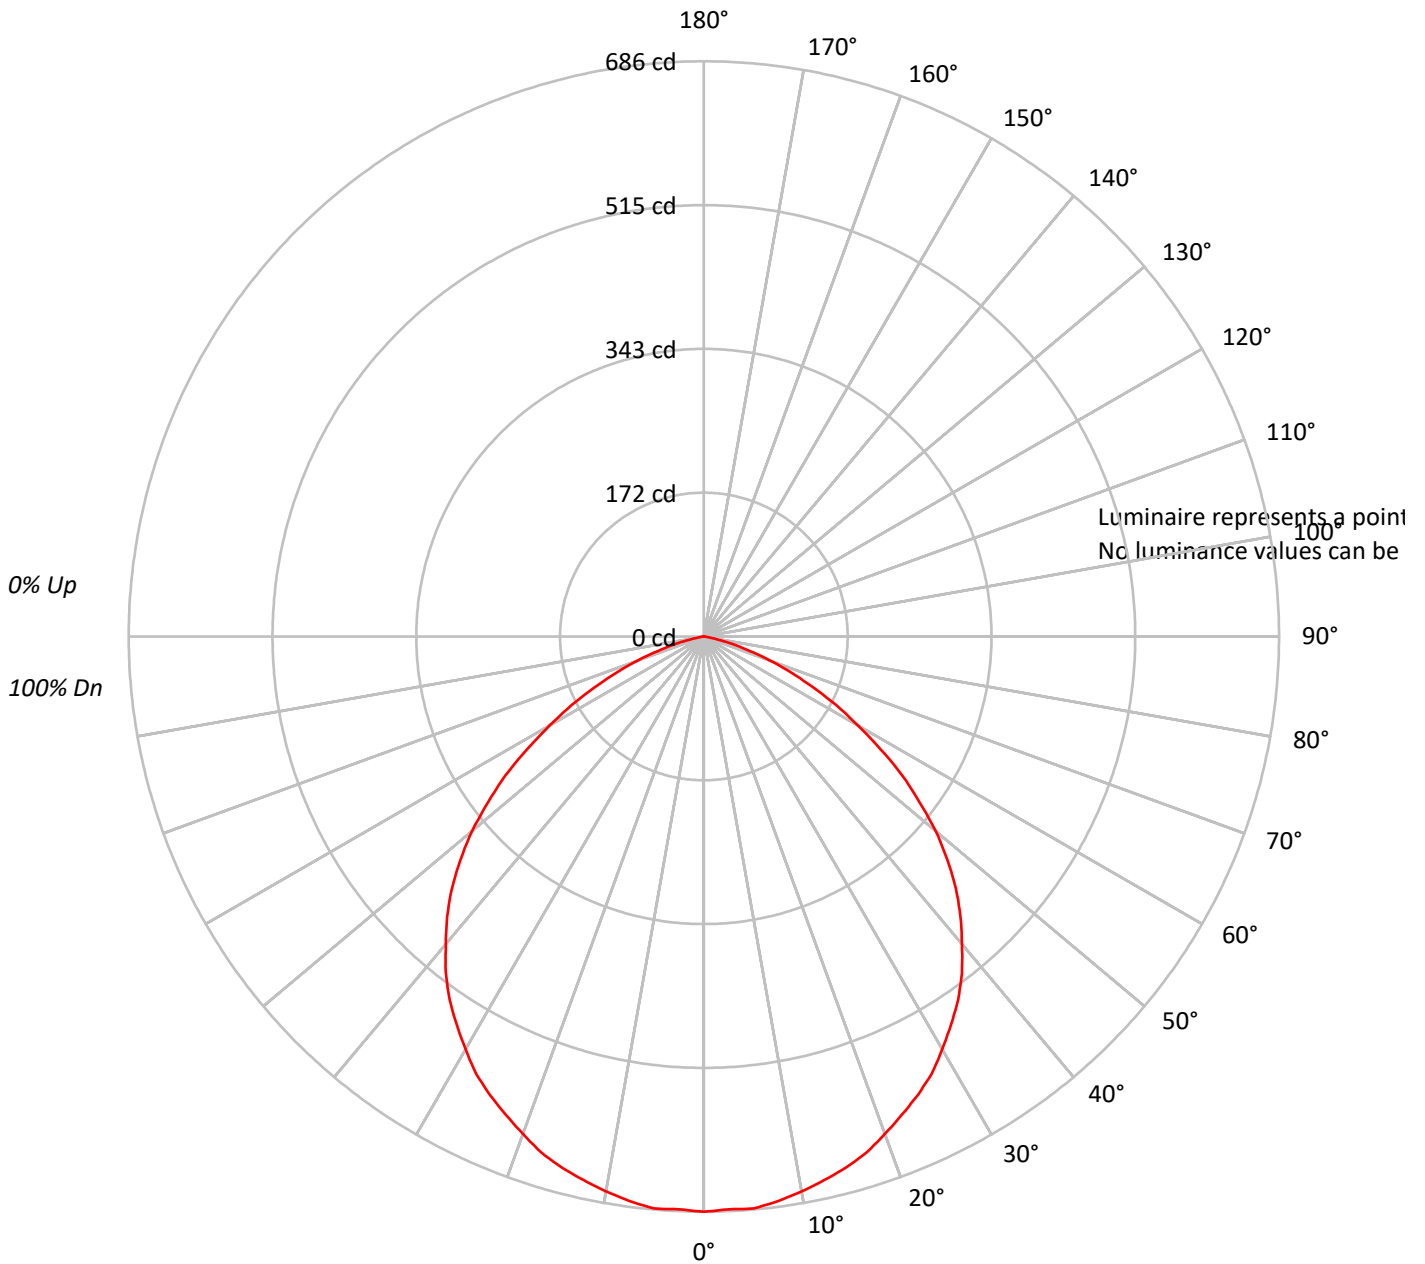



TEST NUMBER: P211498

CATALOG NUMBER: LSR4B20D010BZ EC4B10209027 4LBCSMB1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	111	107	103	100	108	104	101	98	100	98	95	96	94	92	93	91	90	88			88
2	102	95	89	84	99	93	87	83	89	85	81	86	82	79	83	80	77	75			75
3	93	84	77	71	91	83	76	70	80	74	69	77	72	68	74	70	67	65			65
4	86	75	67	61	84	74	66	61	71	65	60	69	63	59	67	62	58	56			56
5	79	67	59	53	77	66	59	53	64	57	52	62	56	52	61	55	51	49			49
6	74	61	53	47	72	60	52	46	58	51	46	57	50	46	55	50	45	43			43
7	68	55	47	41	67	55	47	41	53	46	41	52	45	41	50	45	40	39			39
8	64	51	43	37	62	50	42	37	49	42	37	48	41	37	46	41	36	35			35
9	60	47	39	33	58	46	39	33	45	38	33	44	38	33	43	37	33	31			31
10	56	43	35	30	55	43	35	30	42	35	30	41	34	30	40	34	30	28			28

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P211498

CATALOG NUMBER: LSR4B20D010BZ EC4B10209027 4LBCSMB1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	64.9	4.0
10°-20°	184.9	11.4
20°-30°	277.9	17.1
30°-40°	329.8	20.3
40°-50°	326.3	20.1
50°-60°	256.3	15.8
60°-70°	143.7	8.8
70°-80°	40.4	2.5
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	527.7	32.5
0°-40°	857.5	52.8
0°-60°	1440.2	88.6
0°-90°	1624.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1624.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	686	
5°	685	65
15°	656	185
25°	603	278
35°	529	330
45°	425	326
55°	289	256
65°	143	144
75°	35	40
85°	0	1
90°	0	



TEST NUMBER: P211498

CATALOG NUMBER: LSR4B20D010BZ EC4B10209027 4LBCSMB1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	686.1
2.5°	683.8
5°	684.9
7.5°	679.1
10°	672.1
12.5°	664.0
15°	655.8
17.5°	645.3
20°	631.4
22.5°	617.4
25°	603.4
27.5°	588.3
30°	568.5
32.5°	548.7
35°	528.8
37.5°	505.6
40°	478.8
42.5°	453.1
45°	425.2
47.5°	393.7
50°	361.1
52.5°	323.8
55°	288.9
57.5°	249.3
60°	212.0
62.5°	178.2
65°	143.3
67.5°	113.0
70°	83.9
72.5°	57.1
75°	34.9
77.5°	17.5
80°	4.7
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)